ApeosPort-IV 5070 ApeosPort-IV 4070 ApeosPort-IV 3070 DocuCentre-IV 5070 DocuCentre-IV 4070



User Guide



Microsoft, Windows, Windows NT, Windows Server, Windows Vista, Internet Explorer, and Microsoft Network are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries.

Adobe, Acrobat, PostScript, and Adobe PostScript 3 are trademarks of Adobe Systems Incorporated. Macintosh and Mac OS are trademarks of Apple Inc.

PCL is a registered trademark of Hewlett-Packard Corporation.

RSA and BSAFE are either registered trademarks or trademarks of RSA Security Inc. in the United States and/or other countries.

RSA Security Inc. All right reserved.

All product/brand names are trademarks or registered trademarks of the respective holders.

Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation.

For information on license, refer to About License.

In this manual, safety instructions are preceded by the symbol \triangle . Always read and follow the instructions before performing the required procedures.

The data saved in the hard disk of the machine may be lost if there is any problem in the hard disk. Fuji Xerox is not responsible for any direct and indirect damages arising from or caused by such data loss.

Fuji Xerox is not responsible for any breakdown of machines due to infection of computer virus or computer hacking.

Important

- 1. This manual is copyrighted with all rights reserved. Under the copyright laws, this manual may not be copied or modified in whole or part, without the written consent of the publisher.
- 2. Parts of this manual are subject to change without prior notice.
- 3. We welcome any comments on ambiguities, errors, omissions, or missing pages.
- 4. Never attempt any procedure on the machine that is not specifically described in this manual. Unauthorized operation can cause faults or accidents. Fuji Xerox is not liable for any problems resulting from unauthorized operation of the equipment.

An export of this product is strictly controlled in accordance with Laws concerning Foreign Exchange and Foreign Trade of Japan and/or the export control regulations of the United States.

XEROX, the sphere of connectivity design, PDF Bridge, ContentsBridge, ApeosWare, and CentreWare are trademarks or registered trademarks of Xerox Corporation in the U.S. or Fuji Xerox Co., Ltd.

DocuWorks is a trademark of Fuji Xerox Co., Ltd.

Table of Contents

	Table of Contents	3
1	Before Using the Machine	13
	Preface	14
	Types of Manuals	15
	Using This Guide	
	Organization of This Guide	
	Conventions	
	Safety Notes	18
	Electrical Safety	
	Machine Installation	
	Operational Safety	24
	Consumable	27
	Location of Warning and Caution Labels	28
	Regulation	29
	Radio Frequency Emissions (Class B)	29
	Product Safety Certification (UL, CB)	
	Regulatory Information for RFID	29
	Environment	30
	About License	31
	RSA BSAFE	31
	Heimdal	31
	JPEG Code	31
	Libcurl	31
	FreeBSD	
	OpenLDAP	
	DES	
	TIFF (libtiff)	
	ICC Profile (Little cms) XPS (XML Paper Specification)	
	EDICT and COMPDIC	
	Cyrus SASL	
	Legal Notice	
		07
2	Product Overview	39
	Machine Components	40
	Power Source	51
	Switching the Main Power On	51
	Switching the Power On	52
	Switching the Power Off	
	Switching the Main Power Off	54

	Ground Fault Interrupter	55
	Energy Saver Mode	57
	Entering Energy Saver Mode	58
	Exiting Energy Saver Mode	58
	Control Panel	59
	Screens and Buttons Displayed	63
	About the [Services Home] Screen	64
	Entering Text	68
	Installing the Tray Attachment on Finisher-B1	69
3	Сору	71
	Copying Procedure	
	Step 1 Loading Documents	
	Step 2 Selecting Features	
	Step 3 Entering a Quantity	
	Step 4 Starting the Copy Job	
	Step 5 Confirming the Copy Job in Job Status	
	Operations during Copying	
	Stopping the Copy Job	
	Changing the Number of Copies	
	Interrupting the Copy Job	
	Simple Copy	
	Paper Supply (Selecting the Paper for Copying)	
	Reduce/Enlarge (Making Enlarged/Reduced Copies)	
	2 Sided Copying (Making 2 Sided Copies)	
	Lighten/Darken (Adjusting the Copy Density)	
	2 Pages per Side (Copying Two Pages onto One Sheet)	
	1 Staple	
	Сору	85
	Reduce/Enlarge (Making Enlarged/Reduced Copies)	
	Paper Supply (Selecting the Paper for Copying)	
	2 Sided Copying (Making 2 Sided Copies)	
	Original Type (Selecting the Document Type)	91
	Copy Output (Specifying Finishing Options)	92
	Pages per Side (Copying Multiple Pages onto One Sheet)	92
	Lighten/Darken (Adjusting the Copy Density)	92
	Image Quality	93
	Original Type (Selecting the Document Type)	
	Image Options (Adjusting Copy Density/Sharpness of Images)	94
	Background Suppression (Erasing the Background Color of Documents)	95
	Layout Adjustment	96
	2 Sided Copying (Making 2 Sided Copies)	
	Book Copying (Copying Facing Pages onto Separate Sheets)	
	2 Sided Book Copying (Making 2 Sided Copies of Facing Pages)	99

	Original Size (Specifying the Scan Size for the Document)	101
	Mixed Size Originals (Scanning Different Size Documents Simultaneously)	102
	Edge Erase (Erasing Edges and Margin Shadows of the Document)	103
	Image Shift (Adjusting the Image Position)	105
	Invert Image (Making Reversed Copies of Images)	107
	Original Orientation (Specifying the Orientation of Loaded Documents)	108
	Image Rotation (Changing the Orientation of Images)	
	Output Format	110
	2 Sided Copying (Making 2 Sided Copies)	
	Booklet Creation (Creating a Booklet)	
	Covers (Attaching Covers to Copies)	
	Pages per Side (Copying Multiple Pages onto One Sheet)	
	Poster (Making Enlarged Copies Spread over Multiple Sheets)	
	Repeat Image (Making Multiple Copies on One Sheet)	
	Annotations (Adding a Comment/the Date/Page Numbers to Copies)	
	Watermark (Printing Control Numbers on the Background of Copies)	
	Secure Watermark (Managing Document Security)	
	Folding (Outputting Bi-Folded)	
	Preset Repeat Image (Making Multiple Copies on a Single Sheet)	
	Transparency Options (Inserting Blank Sheets between Transparencies)	
	Copy Output (Specifying Finishing Options)	
	ID Card Copy (Copying Both Sides of an ID Card)	
	Job Assembly	
	Build Job (Processing Documents Scanned with Different Settings as One Job)	
	Sample Job (Checking the Finished Output of the Copy)	
	Combine Original Sets (Adding Originals)	
	Form Overlay (Making Copies to Overlay Documents)	
	Delete Outside/Delete Inside (Deleting Outside or Inside of the Selected Area)	
	Stored Programming (Calling a Stored Program for Build Job)	
		101
4	Fax	153
	Fax Procedure	154
	Step 1 Loading Documents	154
	Step 2 Selecting Features	156
	Step 3 Specifying Destinations	158
	Step 4 Starting the Fax Job	159
	Step 5 Confirming the Fax Job in Job Status	
	Operations during Faxing	162
	Stopping the Fax Job	
	Changing the Scan Settings	
	About Internet Fax	
	Internet Fax Features	
	Sending an Internet Fax	
	Receiving an Internet Fax	
	Useful Features	109

About IP Fax (SIP)	173
IP Fax (SIP) Features	175
Feature Comparison with Regular Fax	176
Sending an IP Fax (SIP)	177
Receiving an IP Fax (SIP)	177
About Server Fax	178
Sending a Server Fax	178
Simple Fax	180
Specifying a Destination Using the Numeric Keypad	
Speed Dialing (Specifying a Destination Using an Address Number)	
Specifying a Destination Using a One Touch Button	
Resolution (Specifying the Scanning Resolution)	
Original Type (Selecting the Document Type)	
2 Sided Scanning (Transmitting 2-sided Originals)	
Fax/Internet Fax	
Internet Fax/Fax/IP Fax (SIP) (Selecting Internet Fax/Fax/IP Fax (SIP))	
+ Add (Sending Faxes to Multiple Recipients)	
Specifying a Destination Using the Address Book	
Speed Dialing (Specifying a Destination Using an Address Number)	
Speed Dialing (Speedying a Destination Using an Address Number)	
Specifying a Destination Using the Keyboard Screen	
Specifying a Destination Using the Redial Feature	
Specifying a Line (Port)	
Entering Specific Symbols	
Removing/Confirming a Recipient	
Lighten/Darken (Adjusting Fax Density)	
2 Sided Scanning (Transmitting 2-sided Originals)	
Original Type (Selecting the Document Type)	
Resolution (Specifying the Scanning Resolution)	
Layout Adjustment	
2 Sided Scanning (Transmitting 2-sided Originals)	
Original Size (Specifying the Scan Size for the Original)	
Mixed Size Originals (Scanning Different Size Documents Simultaneously)	
Book Faxing (Scanning Facing Pages onto Separate Sheets)	
Reduce/Enlarge (Specifying a Scan Ratio)	
Stamp (Adding a Stamp when Scanning a Document)	
Fax/Internet Fax Options	
Acknowledgement Report (Confirming Transmission Results)	
Starting Rate (Selecting a Communication Mode)	
Priority Send/Delay Start (Specifying Send Priority/Send Time)	208
Transmission Header Text (Adding Sender Name and Phone Number to Faxes)	210
(Adding Sender Name and Phone Number to Faxes)	
Cover Page (Transmitting Documents With a Cover Page) Internet Fax Subject (Specifying the Internet Fax Subject)	
Internet Fax Message (Editing the Internet Fax Mail Contents)	
Internet I as message (Luting the internet Fas Mail Contents)	

	Recipient Print Sets (Printing Multiple Sets at the Remote Machine)	214
	Pages per Side (Combining Multiple Pages into One Sheet)	214
	Remote Folder (Using Remote Folder)	215
	F Code (Using F Code Transmission)	218
	Internet Fax Profile (Specifying Internet Fax Profiles)	222
	Encryption (Sending an Internet Fax Encrypted by S/MIME)	223
	Digital Signature (Sending an Internet Fax with a Digital Signature by S/MIME)	223
	More Options	225
	Remote Polling (Retrieving Files from Remote Machines)	225
	Store for Polling	
	(Storing Files on the Machine that a Remote Machine can Retrieve)	
	On-hook (Confirming Remote Machine Response Prior to Transmission)	229
	Broadcast	231
	Broadcast Send (Transmitting to Multiple Recipients)	231
	Relay Broadcast (Transmitting Documents Through a Relay Station)	
	Remote Relay Broadcast (Performing Relay Broadcast to Remote Locations)	235
	Receiving Faxes	239
	Switching between Auto Receive and Manual Receive	239
	Using Auto Receive	240
	Using Manual Receive	
	Using Folder Receive	241
	Facsimile Information Services	242
	Using the Receiver	242
	When Not Using a Receiver	242
5	Scan	245
	Scanning Procedure	
	Step 1 Loading Documents	
	Step 2 Selecting the Features	
	Step 3 Starting the Scan Job	
	Step 4 Confirming the Scan Job in Job Status	
	Step 5 Saving the Scanned Data	253
	Operations during Scanning	254
	Stopping the Scan Job	
	Previewing the Scanned Images during a Scan Job	255
	Changing the Scan Settings	256
	E-mail	257
	Address Book (Specifying an E-mail Address)	258
	New Recipient (Entering an Address)	260
	Add Me (Adding the Sender's Address)	261
	Recipient(s) (Editing a Recipient)	262
	From (Setting the Sender's Address)	262
	. ()	203
	Subject (Setting the Subject)	
	Subject (Setting the Subject) Message (Entering the E-mail Body)	264 264
	Subject (Setting the Subject)	264 264

Color Scanning (Selecting an Output Color)	265
2 Sided Scanning (Scanning Both Sides of a Document)	265
Original Type (Selecting the Document Type)	267
File Format (Selecting a File Format for Output Data)	267
Network Scanning	277
Preview (Previewing the Scanned Images during a Scan Job)	278
Color Scanning (Selecting an Output Color)	278
2 Sided Scanning (Scanning Both Sides of a Document)	278
Original Type (Selecting the Document Type)	278
File Format (Selecting a File Format for Output Data)	278
Scan to PC	279
Transfer Protocol (Selecting a Transfer Protocol)	279
Address Book (Specifying a Destination PC Using the Address Book)	
Browse (Specifying a Destination PC by Browsing Your Network)	281
Specifying a Destination	
(Specifying a Destination PC Using the Screen Keyboard)	282
Preview (Previewing the Scanned Images during a Scan Job)	284
Color Scanning (Selecting an Output Color)	284
2 Sided Scanning (Scanning Both Sides of a Document)	284
Original Type (Selecting the Document Type)	284
File Format (Selecting a File Format for Output Data)	284
Store to Folder	285
Color Scanning (Selecting an Output Color)	286
2 Sided Scanning (Scanning Both Sides of a Document)	286
Original Type (Selecting the Document Type)	286
Preview (Previewing the Scanned Images during a Scan Job)	286
Store to USB	287
Save in (Specifying a Storage Location in the USB Memory Device)	290
Details (Displaying the Details of a Storage Location in the USB Memory Device).	291
Preview (Previewing the Scanned Images during a Scan Job)	292
Color Scanning (Selecting an Output Color)	292
2 Sided Scanning (Scanning Both Sides of a Document)	292
Original Type (Selecting the Document Type)	292
File Format (Selecting a File Format for Output Data)	292
Store & Send Link	293
Scan To (Displaying the E-mail Address of the Authenticated User)	294
From (Displaying the E-mail Address of the Authenticated User)	294
Subject (Setting the Subject)	294
Message (Entering the E-mail Body)	294
Color Scanning (Selecting an Output Color)	294
2 Sided Scanning (Scanning Both Sides of a Document)	294
Original Type (Selecting the Document Type)	294
Preview (Previewing the Scanned Images during a Scan Job)	295
File Format (Selecting a File Format for Output Data)	295
Store to WSD	296

	Computer (Starting a Scan Job via Computer Operation)	. 297
	This Device (Storing Data Scanned by the Machine on a Network Computer)	. 298
	Advanced Settings	
	Photographs (Scanning a Color Photograph)	
	Image Options (Adjusting Scan Density and Image Sharpness) Image Enhancement	. 301
	(Erasing the Background Color of Documents/Adjusting Contrast)	. 302
	Shadow Suppression (Suppressing the Document Background)	. 302
	Color Space (Specifying the Color Space)	. 303
	Layout Adjustment	
	Resolution (Specifying a Scanning Resolution)	
	2 Sided Scanning (Scanning Both Sides of a Document)	
	Book Scanning (Scanning Facing Pages on Separate Sheets)	
	Original Size (Specifying a Scan Size)	
	Mixed Size Originals (Scanning Different Size Documents Simultaneously)	
	Edge Erase (Erasing Edges and Margin Shadows in the Document) Reduce/Enlarge (Specifying a Scanning Ratio)	
	Original Orientation (Specifying the Orientation of the Loaded Documents)	
	E-mail Options/Filing Options	
	Read Receipts (Specifying Read Receipts)	
	Split Send (Sending in Sections)	
	File Name (Specifying a Name for the File to be Sent)	
	Reply To (Specifying a Reply Address)	
	File Name Conflict (Setting the Action to be Taken for File Name Conflict)	
	File Name (Specifying a Name for the File to be Saved)	
	Encryption (Sending E-mail Encrypted by S/MIME)	. 318
	Digital Signature (Sending E-mail with a Digital Signature by S/MIME)	. 318
	Login Name	. 319
	Password	. 319
	Meta Data	. 319
6	Send from Folder	. 321
	Folder Operating Procedure	. 322
	Step 1 Opening the [Send from Folder] Screen	
	Step 2 Selecting a Folder	
	Step 3 Checking/Selecting Files in a Folder	. 323
	Step 4 Operating Files in a Folder	. 323
	Selecting a Folder	. 324
	Checking/Operating Files in a Folder	. 325
	Checking File Details	. 327
	Printing Files in a Folder	. 328
	Configuring/Starting Job Flow	. 331
	[Link Job Flow Sheet to Folder] Screen	. 333
	Job Flow Restrictions	. 336

7	Job Flow Sheets	337
	Job Flow Procedure	
	Step 1 Opening the [Job Flow Sheets] Screen	338
	Step 2 Selecting a Job Flow Sheet	338
	Step 3 Confirming/Changing the Job Flow Sheet	339
	Step 4 Starting the Job Flow Sheet	339
	Selecting/Changing a Job Flow Sheet	340
8	Stored Programming	343
	Stored Programming Overview	344
	Registering/Deleting/Renaming Stored Programs	345
	Registering Stored Programs	346
	Notes and Restrictions on Registering Stored Programs	347
	Registering Stored Programs for Build Job	
	Deleting Stored Programs	
	Entering/Changing a Stored Program Name	
	Assigning/Changing Icons for Stored Programs	
	Calling a Stored Program	
	Calling a Stored Program for Build Job	352
9	Web Applications	353
	Web Applications Overview	354
	Accessing Web Applications	355
	Accessing Using Buttons Registered on the [Services Home] Screen	356
10	Media Print (Text)	357
	Media Print Overview	358
	Supported File Formats	358
	Notes and Restrictions	359
	Inserting USB Memory Device	
	Selecting Files	363
	[Select From List] Screen	364
	Setting the Printing Options	365
	Media Print - Text	365
	Index Print	
11	Job Status	367
	Job Status Overview	368
	Checking Current/Pending Jobs	369
	Checking Completed Jobs	371
	Printing and Deleting Stored Jobs	372
	Secure Print	372
	Sample Set	374
	Delayed Print	

	Charge Print	378
	Private Charge Print	380
	Public Folder	382
	Undelivered Faxes	383
	Printing Pending Jobs	385
	Handling Error Terminations	386
12	Computer Operations	387
	Features Overview	388
	Print	389
	Print Features	389
	Setup	391
	Printing	391
	E-mail Printing	392
	Setup	392
	Receiving E-Mail	392
	Sending Fax	394
	Registering Destinations	394
	Importing Scanned Data	396
	Importing to a TWAIN Compatible Application	396
	Importing Using Stored File Manager 3	398
	Importing Using CentreWare Internet Services	401
	Importing Using EasyOperator	403
	CentreWare Internet Services	404
13	Appendix	409
	Glossary	410
Ind	ex	417

1 Before Using the Machine

This chapter describes how to use this guide, as well as safety notes and legal notice you should read before using the machine.

٠	Preface	. 14
•	Types of Manuals	.15
•	Using This Guide	. 16
•	Safety Notes	. 18
•	Regulation	.29
•	Environment	. 30
•	About License	.31
•	Legal Notice	. 37

Preface

Thank you for selecting the ApeosPort-IV 5070/4070/3070, DocuCentre-IV 5070/4070 (hereafter referred to as "the machine").

This guide describes how to operate the machine and the precautions you should follow during operation. To get the most out of the machine and to use it effectively, be sure to read this guide before use.

The guide assumes that you are familiar with a personal computer and you are knowledgeable of computer networks. When you need additional information, refer to the manuals provided with the personal computer, operating system, and network products.

For information on how to configure your network environment, refer to the Administrator Guide. For information on optional components for the print feature, also refer to the guide provided with each optional component.

After reading this guide, be sure to keep it handy for quick reference. It will be useful in case you forget how to perform operations or if a problem occurs with the machine.

Types of Manuals

The following guides are provided with the machine.

Accompanying Manuals

■User Guide (this guide) (Document CD-ROM)

The guide describes all the necessary steps for copy, print, scan, and fax.

■Administrator Guide (Document CD-ROM)

The guide is intended for system administrators, and describes how to configure network and how to solve problems that may occur with the machine. This guide also describes daily maintenance and the System Settings procedures.

■Quick Reference Guide (Booklet)

The guide describes the basic operations of the machine, as well as daily management and maintenance.

■Manual (HTML)

The manual describes installation and configuration procedures for print drivers and the printer environment. This manual is included in the Driver CD Kit.

Print Driver Help

The help describes print features and operations.

■CentreWare Internet Services Help

The help describes how to change various settings of the machine using a web browser, and how to import scanned data to a computer from the machine.

Important • To display the online help for CentreWare Internet Services, users need to have the environment to connect to the internet. The communication fee shall be borne by you.

Guides for Optional Components

Optional components are available for this machine. Some of them come with user guides. The guides for optional components describe all the necessary steps for using the optional components and installing the software.

Using This Guide

This guide is intended for first time users of the machine. It describes the basic operations for the Copy, Print, Scan, and Fax services.

Organization of This Guide

This guide consists of the following chapters:

■1 Before Using the Machine

Describes how to use this guide, as well as safety notes, legal notices, and other important information you should read before using the machine.

2 Product Overview

Describes the basic information of the machine, such as the names of components, how to use the touch screen, how to switch the machine on and off, and how to exit the Energy Saver mode.

■3 Copy

Describes the basic operations and features for the Copy service.

■4 Fax

Describes the basic operations and features for the Fax services.

5 Scan

Describes the basic operations and features for the Scan services.

6 Send from Folder

Describes the basic operations and features to use folders.

7 Job Flow Sheets

Describes the operations to use a job flow created on a remote system.

■8 Stored Programming

Describes the Stored Programming service that enables you to store customized job settings.

9 Web Applications

Describes the operations to connect to web applications.

■10 Media Print - Text

Describes the basic operations and features of Media Print that allows you to print document files.

11 Job Status

Describes how to check job status and how to delete jobs.

12 Computer Operations

Describes operations performed from a computer, such as printing documents, importing scanned files, using Direct Fax, and operating CentreWare Internet Services.

■13 Appendix

Contains a glossary of terms used in this guide.


Conventions

 The screen shots and illustrations used in this guide vary depending on the machine configuration and optional components installed. Some of the items in the screen shots may not be displayed or available depending on your machine configuration.
 The procedures in this guide may vary depending on the driver and utility software being used due to the upgrades.
• In this document, "Computer" refers to a personal computer or workstation.
The following terms are used in this guide:
Important : Important information that you should read.
Note : Additional information on operations or features.
 The following symbols are used in this guide:
" " · A cross-reference included in this guide.
 Names of CD-ROM, features, and touch screen messages and input text.
[] : • Folders, files, applications, button or menu names displayed on the touch screen.
 Names of menus, commands, windows, or dialog boxes displayed on the computer screen and their buttons and menu names.
< > button : Hardware buttons on the control panel.
< > key : Keys on the keyboard of the computer.
 Path to a certain item within a procedure on the control panel. For example: When you see the procedure "select [Tools] > [Setup] > [Create Folder]", this means that you need to select [Tools], select [Setup], and then select [Create Folder].
 Path to a certain item within a procedure on a computer. For example: When you see the procedure "to search for files and folders, click [Start] > [Search] > [For Files or Folders]", this means that you need to click [Start], click [Search], and then click [For Files or Folders] to search for files and folders.
 Cross-reference For example: "Refer to "5 Tools" > "Common Service Settings" > "Audio Tones" in the Administrator Guide." The sentence above means that you need to refer to the section "Audio Tones", which can be found under "Common Service Settings" in chapter 5 Tools of the Administrator Guide.

• Orientation of documents or paper is described in this guide as follows:

, , Long Edge Feed (LEF): Loading documents or paper in portrait orientation when you view the machine from the front.

, , Short Edge Feed (SEF): Loading documents or paper in landscape orientation when you view the machine from the front.



Safety Notes

Before using this product, read "Safety Notes" carefully for safety use.

This product and recommended supplies have been tested and found to comply with strict safety requirements including safety agency approvals and compliance with environmental standards. Follow the following instructions for safety use.

Any unauthorized alteration including an addition of new functions or connection to external devices may not be covered by the product warranty. Contact your local Fuji Xerox representative for more information.

Follow all warning instructions marked on this product. The warning marks stand for the followings:

DANGER	Used for item that if not followed strictly, can lead death or severe or fatal injuries and the possibility to do it is comparatively high.
	Used for items that if not followed strictly, can lead to severe or fatal injuries.
	Used for items that if not followed strictly, can cause injuries to user or damages to machine.
	\triangle : A symbol for items to pay attention to when handling machine. Follow instructions carefully to use machine safely.
	Caution Flammable Explodable Action to the shock of the s
	Solution in the symbol for prohibited items. Follow instructions carefully to avoid any dangerous acts.
	Prohibited No fire Do not Do not use Do not Keep away Never touch touch in bathroom tear down from wet with wet han
	 A symbol for items that must be performed. Follow instructions carefully to carry out these essential tasks.
	Instructions Unplug Ground/ Earth

Electrical Safety

This product shall be operated by the power source as indicated on the product's data plate. Consult your local power company to check if your power source meets the requirements.



WARNING: Connect this product to a protective earth circuit.

This product is supplied with a plug that has a protective earth pin. The plug fits only into an earthed electrical outlet. This is a safety feature. If the plug doesn't fit to the outlet, contact an electrician to replace the outlet to avoid risk of electric shock. Never use an earthed adapter plug to connect the product to the electrical outlet that has no earth connection terminal.

Improper connection of a grounding conductor may cause electric shock.



Plug the power cord directly into a grounded electrical outlet. To prevent overheat and a fire accident, do not use an extension cord, a multi-plug adaptor or a multiple connector. Consult your local Fuji Xerox representative to check if an outlet is grounded.



Connect this product to a branch circuit or an outlet that has larger capacity than the rated ampere and voltage of this product. See the data plate on the rear panel of this product for its rated ampere and voltage.



Never touch the power cord with wet hands. It may cause electric shock.



Do not put an object on the power cord.



Always keep the plug connection free of dust. The dusty and damp environment may bring about minute electric current in a connector. It may generate heat and eventually cause a fire accident.



To avoid the risk of electric shock and a fire accident, only use the power cord supplied with this product or the ones designated by Fuji Xerox.

The power cord is exclusive use for this product. Do not use it for any other product.

Do not damage or alter the power cord. Damage and alteration may generate heat and eventually cause electric shock or a fire accident.

If the power cord is damaged or insulated wires are exposed, contact your local Fuji Xerox representative for its replacement. Do not use a damaged or uninsulated cord to avoid the risk of electric shock and a fire accident.



When cleaning this product, always switch off and unplug it. Access to a live machine interior may cause electric shock.



Do not unplug or re-plug this product with the switch on. Plugging and unplugging a live connector may deform the plug and generate heat, and eventually cause a fire accident.



Hold the plug not the cord when unplugging this product, or it may damage the cord and cause electric shock or a fire accident.

Switch off and unplug the product when it (i.e., fax function) is not used over weekends or long holidays.

Please note that it cannot receive fax message during switch-off.

1



Once a month, switch off this product and check if

- the power cord is plugged firmly into an electrical outlet;
- the plug is not excessively heated, rusted or bent;
 - the plug and electrical outlet are free of dust; and
 - the power cord is not cracked or worn down.

Once you notice any unusual condition, switch off and unplug this product first and contact your local Fuji Xerox representative.

Machine Installation



Do not locate this product where people might step on or trip over the power cord. Friction or excessive pressure may generate heat and eventually cause electric shock or a fire accident.

Never locate this product in the following places:

- Near radiators or any other heat sources
- Near volatile flammable materials such as curtains
- In the hot, humid, dusty or poorly ventilated environment
- In the place receiving direct sunlight
- Near cookers or humidifiers




Locate this product on a level and sturdy surface that can withstand its weight. Otherwise, if tilted, the product may fall over and cause injuries.


Locate this product in a well-ventilated area. Do not obstruct ventilation openings of the product.


Keep the minimum clearance as follows for ventilation and an access to the power plug. Unplug the product if an abnormal condition is noted.

With the duplex document feeder











(Unit: mm)

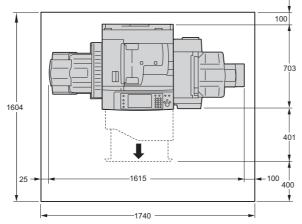


With Finisher-B1 (optional) and Side Tray (optional)

(Unit: mm)

With Booklet Maker Unit for Finisher-B1 (optional) and Side Tray (optional)

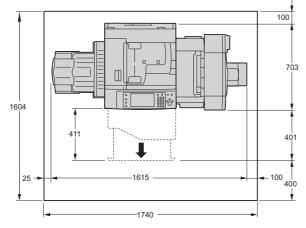



⁽Unit: mm)

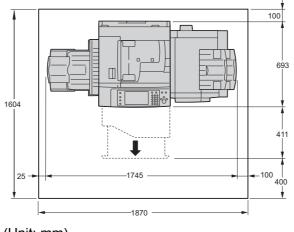


With Finisher-C1 (optional) and Side Tray (optional)




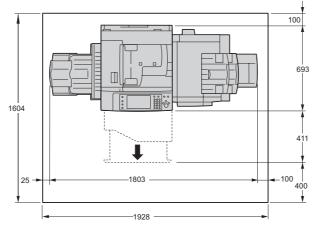




(Unit: mm)



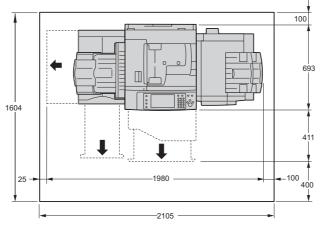

(Unit: mm)


With Finisher-C1 with Booklet Unit (optional), Side Tray (optional), and HCF Kit (optional)

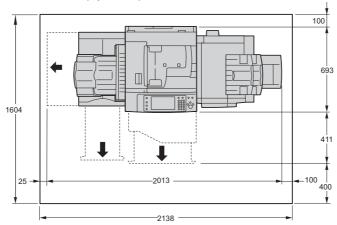


(Unit: mm)



Do not incline the product at more than 10 degree angle. Otherwise, it may fall over and cause injuries.

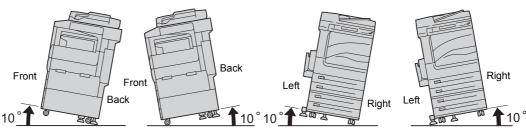

Always lock the wheels of this product and turn down the adjustable foot to the floor after installation. Otherwise, it may fall over or slide and cause injuries.

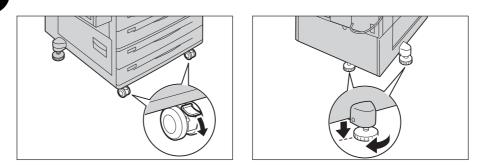

Others

To keep this product in a good performance and condition, always use it in the following environment:

• Temperature: 10 - 32°C (28°C or less at the humidity of 85%)

• Humidity: 15 - 85% (62.5% or less at the temperature of 32°C)

When the product is left in a chilly room and the room is rapidly warmed up by heater, dew condensation may form inside the product and cause a partial deletion on printing.

Operational Safety



The operator's product maintenance procedures are described in the customer documentation supplied with this product. Do not carry out any other maintenance procedures not described in the documentation.



This product features safety design not to allow operators access to hazard areas. The hazard areas are isolated from operators by covers or protectors which require a tool to remove. To prevent electric shock and injuries, never remove those covers and protectors.



To avoid the risk of electric shock and a fire accident, switch off and unplug the product promptly in the following conditions, then contact your local Fuji Xerox representative.

- The product emits smoke or its surface is unusually hot.
- The product emits unusual noise or odor.
- The power cord is cracked or worn down.
- A ground fault interrupter, fuse or any other safety device becomes activated.
- Any liquid is spilled into the product.
- The product is soaked in water.
- Any part of the product is damaged.

Do not insert any object into slots or openings of this product.

Do not place any of the followings on the product:

• Liquid container such as flower vases or coffee cups

- · Metal parts such as staples or clips
- Heavy objects

If liquid is spilled over or metal parts are slipped into the product, it may cause electric shock or a fire accident.



Do not use conductive paper such as origami paper, carbonic paper or conductively-coated paper. When paper jam occurs, it may cause short-circuit and eventually a fire accident.



When cleaning this product, use the designated cleaning materials exclusive to it. Other cleaning materials may result in poor performance of the product. Never use aerosol cleaners to avoid catching fire and explosion.



Always switch off when removing paper jam or checking the product. Be careful with your fingers, clothes, accessories, etc. not to be caught by rotating parts during operation.



Never play the CD-ROM supplied with the product on an audio player. Always use a CD-ROM player. Otherwise, large sound may damage audio players or your ears.



Laser Safety

CAUTION: Any operations or adjustments not stated in the operation manual may cause hazardous light exposure and eventually burn injuries or loss of eyesight.

This product has been tested and found to comply with the Class 1 Laser Equipment requirements defined by the international standard IEC60825 and has no light exposure hazard. The product has no hazardous light emission as it features light protection components and covers to shut in all light beam during operation and maintenance.


1



Keep electrical and mechanical safety interlocks active. Keep the safety interlocks away from magnetic materials. Magnetic materials may accidentally activate the product and cause injuries or electric shock.

A ground fault interrupter is embedded in this product. If current leakage occurs, the ground fault interrupter automatically cuts off power circuit to prevent electric shock and a fire accident. The ground fault interrupter is normally ON. Check once a month if the ground fault interrupter works properly in accordance with the following procedures:


1) Press the power switch to the [⁽¹⁾] position to switch the power off.




- When the Finisher-B1 (optional) is installed
- 2) Make sure that the touch screen is blank and the <Energy Saver> button is not lit.
- 3) Open the front cover.




4) Press the main power switch to the [O] position to switch the main power off.



- 5) Press the <TEST> button lightly with a sharp edge such as a pen tip. If the <RESET> button pops up, it means that the ground fault interrupter circuit is working properly. If not, the circuit is not working properly.
- 6) Press the <RESET> button back to the <RESET> button depressed position.





If the circuit does not work properly, contact your local Fuji Xerox representative.



Do not attempt to remove a paper deeply jammed inside the product, particularly a paper wrapped around the fusing unit or the heat roller. Otherwise, it may cause injuries or burns. Switch off the product immediately and contact your local Fuji Xerox representative.



Never touch the paper output area of the finisher during operation. It may cause injuries.



Be careful in removing jammed staples.



Be careful not to get injured by waste staples when detaching a staple dust box.



Waste staples may come out with output paper. Be careful not to get injured by the staples.



Never touch safety interlocks. When a front cover is open, safety interlocks become activated to stop the machinery. Do not apply pressure on safety interlocks with a coin or screwdriver. Otherwise, the machinery may become activated and cause injuries.



Do not staple punched holes of paper. Sharp points of a staple may cause injuries.



Do not apply excessive force to hold thick document on the document glass. It may break the glass and cause injuries.



To move this product to another location, contact your local Fuji Xerox representative.



Ventilate well during extended operation or mass copying. It may affect the office air environment due to odor such as ozone in a poorly ventilated room.

Provide proper ventilation to ensure the comfortable and safe environment.

Consumable



Store all consumables in accordance with the instructions given on its package or container.

Use a broom or a wet cloth to wipe off spilled toner. Never use a vacuum cleaner for the spills. It may catch fire by electric sparks inside the vacuum cleaner and cause explosion. If you spill a large volume of toner, contact your local Fuji Xerox representative.



Never throw a toner cartridge into an open flame. Remaining toner in the cartridge may catch fire and cause burn injuries or explosion.



If you have a used toner cartridge no longer needed, contact your local Fuji Xerox representative for its disposal.



CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.



Keep drum cartridges (or drum if not a cartridge type) and toner cartridges out of the reach of children. If a child accidentally swallows toner, spit it out, rinse mouth with water, drink water and consult a physician immediately.



When replacing drum cartridges (or drum if not a cartridge type) and toner cartridges, be careful not to spill the toner. In case of any toner spills, avoid contact with clothes, skin, eyes and mouth as well as inhalation.

If toner spills onto your skin or clothing, wash it off with soap and water.

If you get toner particles in your eyes, wash it out with plenty of water for at least 15 minutes until irritation is gone. Consult a physician if necessary.


If you inhale toner particles, move to a fresh air location and rinse your mouth with water.

If you swallow toner, spit it out, rinse your mouth with water, drink plenty of water and consult a physician immediately.

Location of Warning and Caution Labels



Always follow all warning instructions marked on or supplied with this product. To avoid the risk of burn injuries and electric shock, never touch the area with the "High Temperature" or "High Voltage" marks on.

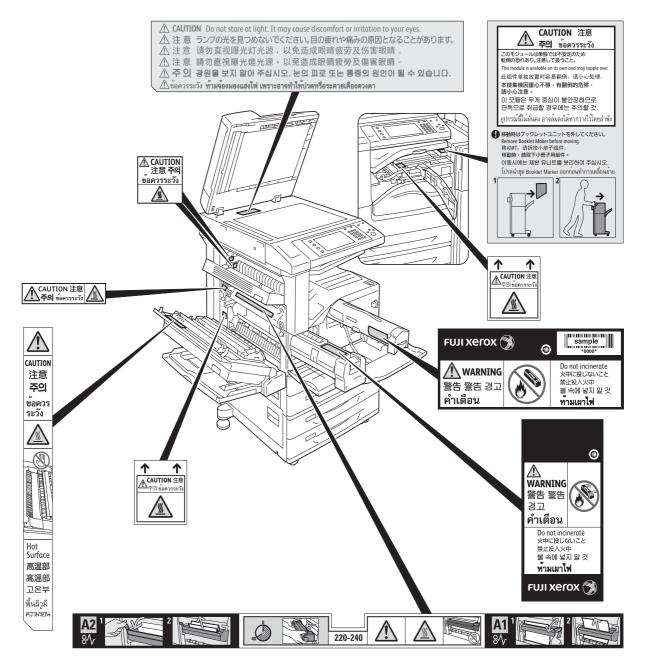

Regulation

Radio Frequency Emissions (Class B)



This product has been tested and found to comply with the limits for a Class B digital device, pursuant to the International Standard for Electromagnetic Interference (CISPR Publ. 22) and Radiocommunications Act 1992 in Australia/New Zealand. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning this product off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between this product and the receiver.
- Connect this product into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes and modifications to this product not specifically approved by Fuji Xerox may void the user's authority to operate this product.

Product Safety Certification (UL, CB)

This product is certified by the following agency using the safety standards listed.

Agency <u>Standard</u> Intertek IEC60950-1:ed. 2

Regulatory Information for RFID

This product contains Radio Frequency Identification system device (RFID) and it is certified in compliance with applicable local laws and/or regulations.

Environment

- For environmental protection and efficient use of resources, Fuji Xerox reuses returned toner cartridges and drum cartridges to make recycle parts, recycle materials or energy recovery.
- Proper disposal is required for toner cartridges and drum cartridges no longer needed. Do not open toner cartridges and drum cartridges. Return them to your local Fuji Xerox representative.

About License

This section describes information about licenses. Be sure to read through it.

RSA BSAFE



This product includes RSA[®] BSAFETM Cryptographic software from RSA Security Inc.

Heimdal

Copyright (c)2000 Kungliga Tekniska Högskolan (Royal Institute of Technology, Stockholm, Sweden). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

JPEG Code

Our printer software uses some of the codes defined by the Independent JPEG Group.

Libcurl

COPYRIGHT AND PERMISSION NOTICE

Copyright (c) 1996 - 2006, Daniel Stenberg, <daniel@haxx.se>.

All rights reserved.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

FreeBSD

This product contains the part of FreeBSD codes.

The FreeBSD Copyright Copyright 1994-2006 The FreeBSD Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE FREEBSD PROJECT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FREEBSD PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The views and conclusions contained in the software and documentation are those of the authors and should not be interpreted as representing official policies, either expressed or implied, of the FreeBSD Project.

OpenLDAP

Copyright 1998-2006 The OpenLDAP Foundation All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted only as authorized by the OpenLDAP Public License.

A copy of this license is available in the file LICENSE in the top-level directory of the distribution or, alternatively, at <http://www.OpenLDAP.org/license.html>.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Individual files and/or contributed packages may be copyright by other parties and/or subject to additional restrictions.

This work is derived from the University of Michigan LDAP v3.3 distribution. Information concerning this software is available at http://www.umich.edu/~dirsvcs/ldap/ldap.html.

This work also contains materials derived from public sources.

Additional information about OpenLDAP can be obtained at <http://www.openIdap.org/>.

Portions Copyright 1998-2006 Kurt D. Zeilenga.

Portions Copyright 1998-2006 Net Boolean Incorporated.

Portions Copyright 2001-2006 IBM Corporation.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted only as authorized by the OpenLDAP Public License.

Portions Copyright 1999-2005 Howard Y.H. Chu.

Portions Copyright 1999-2005 Symas Corporation.

Portions Copyright 1998-2003 Hallvard B. Furuseth.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that this notice is preserved.

The names of the copyright holders may not be used to endorse or promote products derived from this software without their specific prior written permission. This software is provided "as is" without express or implied warranty.

Portions Copyright (c) 1992-1996 Regents of the University of Michigan. All rights reserved. Redistribution and use in source and binary forms are permitted provided that this notice is preserved and that due credit is given to the University of Michigan at Ann Arbor. The name of the University may not be used to endorse or promote products derived from this software without specific prior written permission. This software is provided "as is" without express or implied warranty.

The OpenLDAP Public License

Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions in source form must retain copyright statements and notices,
- 2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and
- 3. Redistributions must contain a verbatim copy of this document.

The OpenLDAP Foundation may revise this license from time to time.

Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANT-ABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAM-AGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLI-GENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The names of the authors and copyright holders must not be used in advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City, California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

DES

This product includes software developed by Eric Young(eay@mincom.oz.au)

AES

Copyright (c) 2003. Dr Brian Gladman. Worcester. UK. All rights reserved. This product uses published AES software provided by Dr Brian Gladman under BSD licensing terms.

TIFF (libtiff)

Lib TIFF copyright (c) 1988-1997 Sam leffler Copyright (c) 1991-1997 Silicon Graphics. Inc.

ICC Profile (Little cms)

Little cms copyright (c) 1988-2004 Marti Maria

XPS (XML Paper Specification)

This product may incorporate intellectual property owned by Microsoft Corporation. The terms and conditions upon which Microsoft is licensing such intellectual property may be found at http://go.microsoft.com/fwlink/?LinkId=52369.

EDICT and COMPDIC

The Japanese-English dictionaries (EDICT and COMPDIC) edited by The Electronic Dictionary Research and Development Group under the coordination of Professor James William Breen at Monash University are used in the searchable PDF kit option of Fuji Xerox.

These Japanese-English dictionary files are licensed to customers under the terms and conditions of a Creative Commons Attribution-ShareAlike License. Prior to use, be sure to check the terms and conditions of this license at the URL below. Use of these Japanese-English dictionaries is not permitted unless you agree to the terms and conditions of this license.

Furthermore, care should be taken because at the point in time that you begin to use these Japanese-English dictionaries as specified in the said license, you accept and agree to be bound by the terms and conditions of this license.

The Japanese-English dictionaries are provided to customers on an as-is basis, and Fuji Xerox and the original supplier make no representations of warranties of any kind.

 Original Author Information (extracted from http://www.csse.monash.edu.au/~jwb/ edrdg/licence.html)
 Copyright over the documents covered by this statement is held by James William BREEN and The Electronic Dictionary Research and Development Group at Monash University.

- Monash University License Information http://www.csse.monash.edu.au/~jwb/edrdg/licence.html
- Information Regarding EDICT and COMPDIC http://www.csse.monash.edu.au/~jwb/edict.html http://www.csse.monash.edu.au/~jwb/compdic_doc.html
- Information Regarding the Creative Commons Attribution-ShareAlike License http://creativecommons.org/licenses/by-sa/2.5/legalcode

Cyrus SASL

Copyright (c) 1998-2003 Carnegie Mellon University. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3. The name "Carnegie Mellon University" must not be used to endorse or promote products derived from this software without prior written permission. For permission or any other legal details, please contact

Office of Technology Transfer Carnegie Mellon University 5000 Forbes Avenue Pittsburgh, PA 15213-3890

(412) 268-4387, fax: (412) 268-7395

tech-transfer@andrew.cmu.edu

 Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by Computing Services at Carnegie Mellon University (http://www.cmu.edu/computing/)."

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL

DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Legal Notice

Copying or printing certain documents may be illegal in your country. Penalties of fines or imprisonment may be imposed on those found guilty. The following are examples of items that may be illegal to copy or print in your country.

- Currency
- Banknotes and checks
- · Bank and government bonds and securities
- · Passports and identification cards
- · Copyright material or trademarks without the consent of the owner
- Postage stamps and other negotiable instruments

This list is not inclusive and no liability is assumed for either its completeness or accuracy. In case of doubt, contact your legal counsel.

2 **Product Overview**


This chapter describes the basic information of the machine, such as machine components, how to switch the machine on and off, and how to use the touch screen.

•	Machine Components	.40
•	Power Source	.51
•	Ground Fault Interrupter	.55
•	Energy Saver Mode	. 57
•	Control Panel	. 59
•	About the [Services Home] Screen	.64
•	Entering Text	.68
•	Installing the Tray Attachment on Finisher-B1	.69

Machine Components

The following describes machine components and their functions.


4 Tray Model

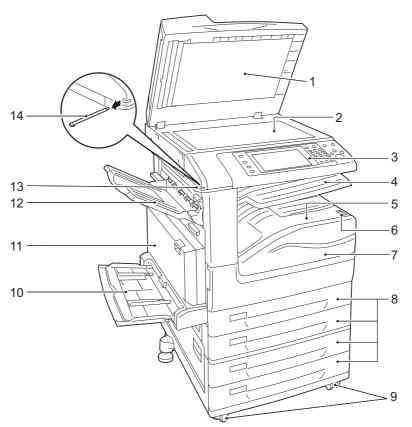

No.	Component	Function
1	Document cover	Holds a document in place.
2	Document glass	Load a document here.
3	Control panel	Consists of operation buttons, LED indicators, and a touch screen. Refer to "Control Panel" (P.59).
4	Exit 2 tray (optional)	Outputs are delivered here by separating the center tray into two levels.
5	Center tray	Copies and prints are delivered here, facing down.
6	Power switch	Switches the power of the machine on and off. Refer to "Power Source" (P.51).
7	Front cover	Open this cover to replace the consumables.
8	Tray 1, 2, 3 (optional), 4 (optional)	Load paper here.
9	Locking casters	Used for locking the wheels of the machine. Lock these casters after moving the machine to its installation site.
10	Tray 5 (Bypass)	Used for loading non-standard paper (thick-stock paper, and other special media) that cannot be loaded in the Trays 1 to 4, and 6.
11	Duplex module	Automatically prints or copies on both sides of paper.
12	Side tray (optional)	Copies and prints are delivered here, facing up.


No.	Component	Function	
13	Stylus pen holder	Stores the stylus pen.	
14	Stylus pen	Used for touching the touch screen on the control panel to configure settings. Note • You can directly touch the touch screen not only with the stylus pen but also with a finger.	

■Tandem Tray Module Model

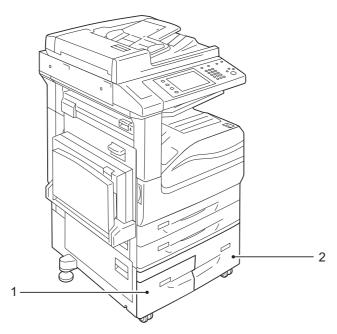


No.	Component	Function
1	Tray 3 (optional)	Load paper here.
2	Tray 4 (optional)	Load paper here.

■Left and rear view

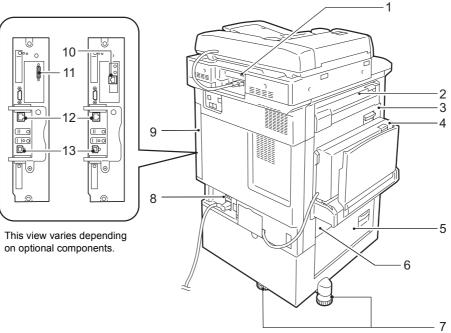


No.	Component	Function
1	USB 2.0 interface connector (optional)	Connects to the cable of a Memory Card Reader or a USB memory device.
2	Cover E	Open this cover to clear paper jams.
3	Cover A	Open this cover to clear paper jams.
4	Cover D	Open this cover to clear paper jams.
5	Cover C	Open this cover to clear paper jams. When Tray 6 is installed, open this cover after moving Tray 6 to the left.
6	Cover B	Open this cover to clear paper jams. When Tray 6 is installed, open this cover after moving Tray 6 to the left.
7	Adjusting foot	Prevents the machine from toppling over. Move the machine to its installation site and then rotate this adjuster in the clockwise direction until it touches the floor.
8	RESET button	Automatically switches the machine off when a current leakage is detected.
9	Rear right cover	Open this cover when connecting an interface cable.
10	Gigabit Ethernet interface connector (optional)	Connects to a 1000BASE-T Ethernet interface cable.
11	Parallel interface connector (optional)	Connects to a Centronics-conformed interface cable, and connects the machine to a computer.
12	10BASE-T/100BASE-TX connector	Connects to a network cable. When the Gigabit Ethernet board (optional) is installed, this connector cannot be used.
13	USB 2.0 interface connector	Connects a USB cable for printing.

∎Inside

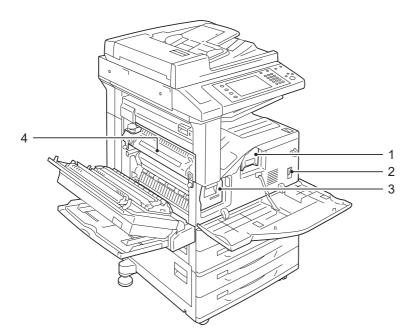

No.	Component	Function
1	Toner cartridge	Contains toner (image forming powder).
2	Main power switch	Switches the main power of the machine on and off. Always follow the instructions of the system administrator. Important • Always switch the power off before switching the main power off.
		For details, refer to "Power Source" (P.51).
3	Drum cartridge	Contains a photoconductor.
4	Fusing unit	Fuses toner on paper.
		Important • Do not touch this unit as it is extremely hot.

■Telephone line connectors

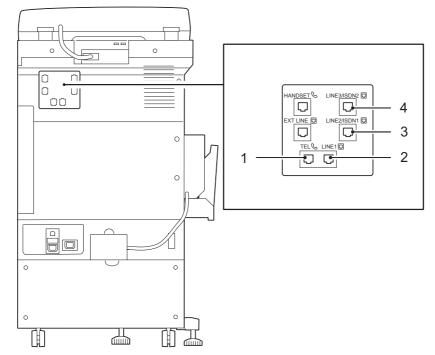


Connector No.	Name marked on the cover of the machine	Name displayed on the touch screen	Function
1	TEL	-	Used to connect your telephone.
2	LINE1	Line 1	Use this connector to connect to a telephone line.
3	LINE2/ISDN1	Line 2	Use this connector to connect to a telephone line. ISDN is not supported.
4	LINE3/ISDN2	Line 3	Use this connector to connect to a telephone line. ISDN is not supported.

Note

- The Fax feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
- LINE2/ISDN1 and LINE3/ISDN2 are optional.
- If there is a cover over the TEL connector, contact our Customer Support Center when you want to connect your telephone to the machine.
- Only the line connected to the LINE1 connector is available when you make a phone call using the telephone connected to the TEL connector. (LINE2/ISDN1 and LINE3/ISDN2 are not available.)

■Duplex automatic document feeder

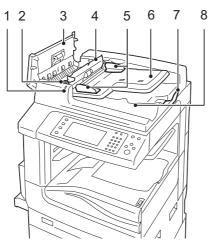




No.	Component	Function
1	Confirmation indicator	Lights up when a document is loaded correctly.
2	Knob	Turn this knob to clear paper jams.
3	Top cover	Open this cover to clear paper jams.
4	Green tab	Open this tab to clear paper jams.
5	Document guides	Use these guides to align the edges of documents.
6	Document feeder tray	Load documents here.
7	Document stopper	Prevents outputs from falling off.
8	Document output tray	Scanned documents are delivered here.
9	Constant velocity transport glass	Scans a loaded document.


Note • In this guide, the duplex automatic document feeder is referred to as the "document feeder" or "DADF".

■HCF Kit (optional)

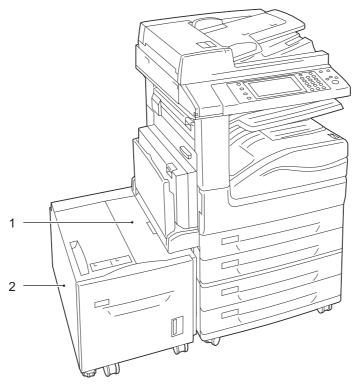

No.	Component	Function
1	Tray 6 top cover	Open this cover to clear paper jams after moving Tray 6 to the left.
2	Tray 6	Load paper here.

■Finisher-A1 (optional)

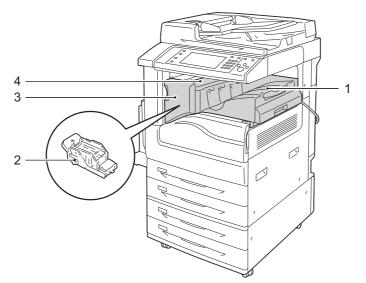


No.	Component	Function	
1	Center tray	y Copies or prints are delivered here.	
2	Staple cartridge	e cartridge Contains staples. Remove this cartridge when replacing or adding staples, or clearing staple jams.	
3	Front cover	ront cover Open this cover when replacing or adding staples, or clearing staple jams.	
4	Top cover	Open this cover to clear paper jams.	

Note

• The Finisher-A1 is optional. In this guide, the Finisher-A1, Finisher-B1, and Finisher-C1 are referred to as the "finisher".

■Finisher-B1 (optional)

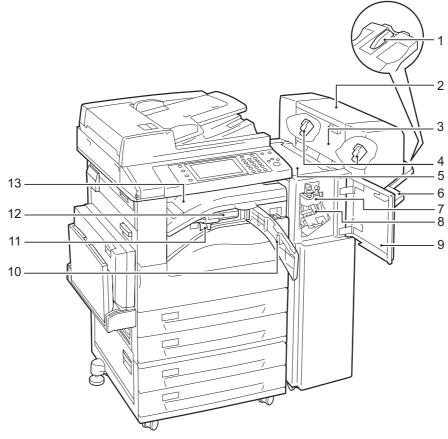


No.	Component	Function	
1	Tray attachment	Install this attachment when delivering A4 for B5 for paper to the finisher tray without stapling.	
		For more information, refer to "Installing the Tray Attachment on Finisher- B1" (P.69).	
2	Booklet unit (optional)	Staples creased outputs.	
3	Booklet unit side cover	Open this cover when replacing the booklet staple cartridge.	
4	Booklet staple cartridge	Contains staples. Remove this cartridge when replacing or adding staples, or clearing staple jams.	
5	Top cover	Open this cover to clear paper jams.	
6	Finisher tray	Stapled or creased outputs are delivered here.	
7	Creaser unit	Creases outputs in half.	
8	Staple cartridge	Contains staples. Remove this cartridge when replacing or adding staples, or clearing staple jams.	
9	Front door	Open this cover when clearing paper jams or replacing staples.	
10	Front transport cover	Open this cover when discarding punch scraps.	
11	Hole punch waste container	Collects scraps from the puncher.	
12	US 2/3 Hole Punch Kit (US standard) (optional) 2/4 Hole Punch Kit	Punches holes in outputs. Note • The distance between the two holes made with the US 2/3 Punch Kit (US standard) is 70 mm, which is different from the 80 mm	
	(optional)	Kit (US standard) is 70 mm, which is different from the 80 mm distance made with the 2/4 Hole Punch Kit.	

No.	Component	Function	
13	Center tray (Top cover of the finisher transport)	Copies and prints are delivered here when they cannot be delivered to the finisher tray. Pull the cover upward when clearing paper jams. Note • Remove outputs delivered to the center tray constantly.	

• The Finisher-B1 is optional. In this guide, the Finisher-A1, Finisher-B1, and Finisher-C1 are referred to as the "finisher".

• The power cord connected to the Finisher-B1 is a connecting cord dedicated to the machine. Do not connect this cord to a device other than the machine.

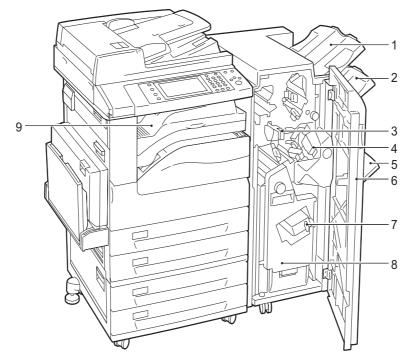

■Finisher-C1 (optional) and Finisher-C1 with Booklet Maker (optional)

No.	Component	Function					
1	Output tray	Outputs are delivered here.					
2	Finisher tray	Stapled outputs are delivered here.					
3	Hole-punch waste container	Collects scraps from the puncher.					
4	Staple cartridge	Contains staples. Remove this cartridge when replacing or adding staples, or clearing staple jams.					
5	Booklet tray (Finisher-C1 with Booklet Maker only)	Documents are delivered here when folding is selected for the Book Creation feature.					
6	Front door	Open this cover when clearing paper jams, replacing or adding staples, clearing staple jams, or discarding punch scraps.					
7	Booklet staple cartridge	Contains staples. Remove this cartridge when replacing or adding staples, or clearing staple jams.					
8	Booklet unit (Finisher-C1 with Booklet Maker only)	Folds and staples outputs.					
9	Center tray (Top cover of the finisher transport)	Copies and prints are delivered here when they cannot be delivered to the output tray or the finisher tray. Pull the cover upward when clearing paper jams. Note • Remove outputs delivered to the center tray constantly.					

Note

• The Finisher-C1 and the Finisher-C1 with Booklet Maker are optional. In this guide, the Finisher-A1, Finisher-B1, and Finisher-C1 are referred to as the "finisher".

Power Source


The machine is provided with a power switch and a main power switch.

■Power switch

To use the machine, press the power switch to the []] position to switch its power on. You can start operations after the machine warms up.

■Main power switch

Press the main power switch to the [O] position. The <Main Power> indicator goes out on the right side of the control panel, and the machine powers off. Do not switch the main power off except when you connect a cable to the machine or clean the machine. Switching off the main power may erase the data in the memory when using the Fax service.



Product Overview 2

Switching the Main Power On

The following describes how to switch the main power on.


Important • Do not switch off the main power immediately after switching on the main power. This may damage the hard disk and the memory or cause a machine malfunction.

- **1** Make sure that the power cord is plugged in correctly.
- **2** Open the front cover.



3 Press the main power switch to the [|] position to switch the main power on.

The <Main Power> indicator lights up on the control panel.



4 Close the front cover.

Switching the Power On

The following describes how to switch the power on.


The machine takes approximately 30 seconds to warm up and to be ready to copy or print after switching the power on. This may take more time depending on your machine configuration.

Switch the power off at the end of the day or when not using the machine for an extended period of time.


Also use the Energy Saver feature to save power consumption while the machine is not in use. For information on the Energy Saver feature, refer to "Energy Saver Mode" (P.57).

Important • If the power is switched off, all the services of the machine will stop. When using the machine throughout the day for jobs such as receiving faxes, do not switch the power off.

1 Press the power switch to the [|] position to switch the power on.




• When the Finisher-B1 (optional) is installed





- The "Please wait..." message indicates that the machine is warming up. The machine is not available while it is warming up.
- If the machine is not powered on, check the following:
- •The power cord is plugged in.
- •The main power is switched on.
- •The <RESET> button is in the depressed position.




Switching the Power Off

The following describes how to switch the power off.

1 Before switching the power off, make sure that the machine has completed all copy or print jobs. Then, make sure that the <Data> indicator is not blinking.

Important • Do not switch the power off in the following situations. If the power is switched off, the data being processed may be erased.

- While data is being received
- While a job is being printed
- While a job is being copied
- While a job is being scanned
- When switching the power off, wait 5 seconds after outputs have been delivered.
- **2** Press the power switch to the $[\bigcirc]$ position.



• When the Finisher-B1 (optional) is installed




- Important Power off processing is performed internally on the machine for a while after the power is switched off. Therefore, do not switch the main power off immediately after switching the power off.
- When powering the machine on after it has been switched off, wait 15 seconds after the touch screen has gone dark.

Switching the Main Power Off


The following describes how to switch the main power off.

- Important Do not switch the main power off when a screen is displayed on the touch screen or while the <Energy Saver> button is blinking. Switching off the main power under such circumstances may damage the hard disk and the memory or cause a machine malfunction.
 - Switch the main power off first when unplugging the power cord. Unplugging the power cord with the main power on may damage the hard disk and the memory or cause a machine malfunction.
- **1** Make sure that the power is switched off.
- **2** Make sure that the touch screen is blank and the <Energy Saver> button is not lit.
- **3** Open the front cover.



4 Press the main power switch to the [O] position to switch the main power off.

The <Main Power> indicator goes out on the control panel.



5 Close the front cover.

Ground Fault Interrupter

The machine is provided with a ground fault interrupter.


In the event of a current leakage, the circuit breaker will automatically cut off the power circuit to prevent any leakage or fire from occurring.

Check that the ground fault interrupter works properly at least once a month.

If you have any problems with the ground fault interrupter, contact our Customer Support Center.

The following describes how to check the ground fault interrupter.


1 Press the power switch to the [[⊕]] position to switch the power off.




- When the Finisher-B1 (optional) is installed
- **2** Make sure that the touch screen is blank and the <Energy Saver> button is not lit.
- **3** Open the front cover.




4 Press the main power switch to the [O] position to switch the main power off.



- **5** Press the <TEST> button lightly with a sharp edge such as a pen tip. If the <RESET> button pops up, it means that the ground fault interrupter circuit is working properly. If not, the circuit is not working properly.
- **6** Press the <RESET> button back to the depressed position.





Energy Saver Mode

The machine is equipped with an Energy Saver mode that saves electricity by reducing the power consumption when no copy or print data is received for a specified time.

The Energy Saver feature has two modes: Low Power mode and Sleep mode.

The machine enters Low Power mode after the preset time has elapsed if the machine is left unused for a fixed period of time.

The machine then enters Sleep mode if a further preset time elapses.

To enter Energy Saver mode, press the < Energy Saver> button on the control panel.

Low Power Mode

In this mode, the power to the control panel and fusing unit is lowered to save power.

The touch screen goes out, and the <Energy Saver> button on the control panel lights up. To use the machine, press the <Energy Saver> button. The <Energy Saver> button goes out to indicate that Low Power mode is exited.

■Sleep Mode

In this mode, the power supply to devices such as the hard disk drive is suspended and the power is lowered more than in Low Power mode.

The touch screen goes out, and the <Energy Saver> button on the control panel lights up. To use the machine, press the <Energy Saver> button. The <Energy Saver> button goes out to indicate that the Sleep mode is exited.


Sleep mode requires more time for the machine to exit and to be ready for use than Low Power mode.

- Note
- When you press the <Energy Saver> button during Energy Saver mode, the touch screen lights up. At this point, the document scanning unit and the output devices remain in Energy Saver mode. Afterwards, by operations such as using the touch screen and opening or closing of the document cover, you can make the devices necessary to activate the machine to exit Energy Saver mode and make the machine ready to start exiting Energy Saver mode.
 - When you make the machine exit Energy Saver mode by pressing the <Energy Saver> button, the machine does not immediately identify the movements such as opening or closing of the front cover. To make the machine identify these operations, operate the control panel before opening the front cover.
 - If you replace toner cartridges or supply paper during Energy Saver mode, the machine does not identify these changes. Before performing these operations, exit Energy Saver mode by first pressing the <Energy Saver> button on the control panel and then pressing the <Machine Status> button.
 - Energy Saver mode is not exited by the following operations:
 - Secure print
 - Fax using Folder Receive
 - Direct fax
 - Accessing a folder of the machine using CentreWare Internet Services
 - When the following device is connected to the machine and a user performs the following operation, Low Power mode can be deactivated without pressing the <Energy Saver> button. If the machine is in Sleep mode, however, Sleep mode will not be deactivated by the operation. By setting longer time to elapse until the machine enters Sleep mode, you can make the machine exit Energy Saver mode without pressing the <Energy Saver> button. For more information on how to change the time to elapse until the machine enters Sleep mode, refer to "1 Before Using the Machine" > "Energy Saver Mode" > "Changing the Interval for Entering Energy Saver Mode" in the Administrator Guide.
 - Placing a smart card on the IC Card Reader (optional)
 - When the machine enters the Low Power mode while a user is authenticated, the machine exits the authentication mode.

Entering Energy Saver Mode

The following describes how to enter Energy Saver mode.

- Note
 To enter Energy Saver mode by pressing the <Energy Saver> button, specify a longer time period in [From Last Operation to Sleep Mode] than in [From Last Operation to Low Power Mode] under [Energy Saver Timers]. For information on [Energy Saver Timers], refer to "5 Tools" > "Common Service Settings" > "Machine Clock/Timers" > "Energy Saver Timers" in the Administrator Guide.
- **1** Press the <Energy Saver> button.
 - Note The machine will not enter Energy Saver mode while a job is being processed. Press the <Energy Saver> button after the job is completed.
 - The machine will not enter Energy Saver mode when [Skip Blank Pages] is enabled. For information on [Skip Blank Pages], refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Skip Blank Pages" in the Administrator Guide.



<Energy Saver> button

Exiting Energy Saver Mode

The following describes how to exit Energy Saver mode.

Energy Saver mode is exited in the following instances:

- Pressing the < Energy Saver> button
- · Receiving a job
- Selecting [Apply] in CentreWare Internet Services
- · Opening the document cover


When the following device is connected to the machine and a user performs the following operation, Low Power mode can be deactivated without pressing the <Energy Saver> button.

- · Placing a smart card on the IC Card Reader (optional)
- Note
 If the machine is in the Sleep mode, however, Sleep mode will not be deactivated by the operation above. Set a longer time to elapse until the machine enters Sleep mode. For more information on how to change the time to elapse until the machine enters Sleep mode, refer to "1 Before Using the Machine" > "Energy Saver Mode" > "Changing the Interval for Entering Energy Saver Mode" in the Administrator Guide.
- **1** Press the <Energy Saver> button.



<Energy Saver> button

Control Panel

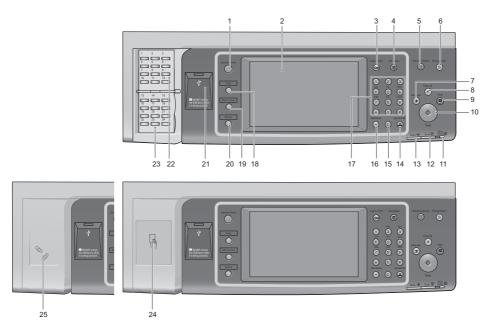

The following describes the names and functions of the components on the control panel.

No.	Component	Function
1	<services home=""> button</services>	Press this button to display the [Services Home] screen.
		You can change the services displayed on the [Services Home] screen. For more information, refer to "1 Before Using the Machine" > "Customizing the Control Panel" > "Customizing the Button Layout" > "Services Home" in the Administrator Guide.
2	Touch screen	Displays messages required for operation, and buttons for various features. You can directly touch the touch screen to instruct operations and set features.
3	<log in="" out=""> button</log>	Lights up when a user is authenticated in System Administration mode, Authentication mode, or Accounting mode. Displays the User ID entry screen for entering System Administration mode, Authentication mode, or Accounting mode. Also press this button to exit these modes.
4	<job status=""> button</job>	Press this button to check or cancel the current job, to check or print stored jobs, or to check completed jobs.
5	<machine status=""> button</machine>	Press this button to check the machine status and meters, to check the status of consumables, and to print reports.
		• By pressing the <machine status=""> button when you exchange consumables, you can make the output device exit Energy Saver mode and check the latest status of the consumables.</machine>
6	<energy saver=""> button</energy>	When the machine is not used for a while, it enters Energy Saver mode to reduce power consumption. When Energy Saver mode is active, the <energy saver=""> button lights up. Press this button to enter or exit Energy Saver mode.</energy>

No.	Component	Function				
7	<interrupt> button</interrupt>	Press this button to suspend a copy or print job in progress to have the machine process another job. During Interrupt mode, the <interrupt> button lights up. The machine exits Interrupt mode when the <interrupt> button is pressed again, and resumes the suspended job.</interrupt></interrupt>				
		Some types of jobs cannot be executed in Interrupt mode. Refer to "16 Appendix" > "Notes and Restrictions" > "Notes and Restrictions on the Interrupt Mode" in the Administrator Guide.				
8	<clear all=""> button</clear>	Returns the settings you made to the default values. The machine returns to the same state as when it is powered on.				
9	<stop> button</stop>	Press this button to pause the current job or communications.				
10	<start> button</start>	Press this button to start scanning a document.				
11	<main power=""> indicator</main>	Lights up when the main power is switched on.				
		Note • If the main power is not switched on, the machine will not be powered on even when the power is switched on.				
12	<error> indicator</error>	Blinks if a system error occurs. This indicator lights up when a problem other than a system error occurs with the machine, including paper jams and running out of paper.				
		If the <error> indicator blinks, contact our Customer Support Center.</error>				
		For information on the remedies for paper jams and running out of paper, refer to "15 Problem Solving" in the Administrator Guide.				
13	<data> indicator</data>	Blinks when the machine is sending or receiving data. This indicator lights up when data is stored in the machine's memory, when received faxes are waiting to be printed, or when faxes are stored in a folder.				
		You can check stored scan files in a Folder List. For information on the Folder List, refer to "4 Machine Status" > "Machine Information" > "Print Reports" > "Folder List" in the Administrator Guide.				
		You can check stored fax files in a Stored File List. For information on the Stored File List, refer to "4 Machine Status" > "Machine Information" > "Print Reports" > "Job Status/Activity Report" > "Stored File List" in the Administrator Guide.				
		You can change the lighting pattern of the <data> indicator. For more information, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Data Indicator" in the Administrator Guide.</data>				
14	<speed dial=""> button</speed>	Press this button to specify a recipient with an address number when sending a fax or e-mail.				
15	<c (clear)=""> button</c>	Press this button to cancel a numerical value you have entered with the numeric keypad.				
16	<dial pause=""> button</dial>	Press this button to insert a pause into a destination number.				
17	Numeric keypad	Use the numeric buttons on the keypad to enter the number of copies, passcodes, and other numerical values.				
18	<copy> button</copy>	[Copy] is assigned to this button by default. Press this button to display the [Copy] screen.				
		For information on how to assign a service to the button, refer to "1 Before Using the Machine" > "Customizing the Control Panel" > "Assigning Services to the Custom Buttons" in the Administrator Guide.				

No.	Component	Function
19	<(Not In Use)> button	Press this button to call its associated service. To the button, you can assign [Language] or any service displayed on the [Services Home] screen.
		For information on how to assign a service to the button, refer to "1 Before Using the Machine" > "Customizing the Control Panel" > "Assigning Services to the Custom Buttons" in the Administrator Guide.
20	<review> button</review>	[Review] is assigned to this button by default. On the [Review] screen, you can check a list of the status of Copy, Fax, and Scan services whose settings have been changed from the defaults. You can also check the details of fax and e-mail recipients.
		For information on how to assign a service to the button, refer to "1 Before Using the Machine" > "Customizing the Control Panel" > "Assigning Services to the Custom Buttons" in the Administrator Guide.
21	USB memory slot	Slot to insert a USB 2.0 memory device.
		Note • This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
22	One touch panels (Only available for machines with the Fax service)	 Contains one touch buttons. Turn over the panels to display buttons 1 - 70, M01, and M02. There are two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following: [Type 1] Buttons 1 to 70 are used for address numbers and they correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and they correspond to the registered stored programs 1 and 2. [Type 2] Buttons 1 to 60 are used for address numbers and they correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and they correspond to the registered address numbers 001 to 12.
		 Note By default, [Type 1] is selected. This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center. For information on how to change the settings registered to the one touch buttons, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" in the Administrator Guide.

No.	Component	Function
23	One touch buttons (Only available for machines with the Fax service)	 Allows you to specify a recipient by simply pressing one button. You can use the buttons for fax and Internet fax jobs. Turn over the panels to display buttons 1 - 70, M01, and M02. There are two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following: [Type 1] Buttons 1 to 70 are used for address numbers and they correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and they correspond to the registered stored programs 1 and 2. [Type 2] Buttons 1 to 60 are used for address numbers and they correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and they correspond to the registered stored programs 1 to 12. Note By default, [Type 1] is selected. This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
		For information on how to change the settings registered to the one touch buttons, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" in the Administrator Guide.
24	Embedded IC Card Reader (optional)	Used to authenticate a user using a smart card. When you touch the smart card to the IC Card Reader, the machine reads the user information registered on the smart card and authenticates the user. An optional component is required to use this feature. For more information, contact our Customer Support Center. When the machine is in Energy Saver mode, touching the smart card to the IC Card Reader deactivates Energy Saver mode. However, this operation does not deactivate Sleep mode. For more information, refer to "Exiting Energy Saver Mode" (P.58).
25	Paper clip tray	Used for placing paper clips and staples.

Screens and Buttons Displayed

You can register or change the services and buttons displayed on the touch screen.

Note • The following screens and buttons may have been changed by the system administrator. Use the machine according to the changes that have been made.

Setting the Initial Screen

You can set the screen displayed after switching the power on or exiting Energy Saver mode.

Setting the Screen Displayed after Auto Clear

You can select [Last Selection Screen] or [Services Home] for the screen to be displayed after Auto Clear.

Assigning Services to the Custom Buttons

You can assign services to the Custom buttons on the control panel: <Copy>, <(Not In Use)>, and <Review>.

By assigning frequently-used services to the Custom buttons, you can switch to the services without returning to the [Services Home] screen.

• By default, [Copy] is assigned to the <Copy> button, and [Review] is assigned to the <Review> button. No service is assigned to the <(Not In Use)> button.


Customizing the [Services Home] Screen

You can customize the layout of services and buttons on the [Services Home] screen that is displayed when you press the <Services Home> button on the control panel.

For information on how to customize the [Services Home] screen, refer to "1 Before Using the Machine" > "Customizing the Control Panel" > "Customizing the Button Layout" > "Services Home" in the Administrator Guide.

About the [Services Home] Screen

This section describes the fields and buttons on the [Services Home] screen which is displayed by pressing the <Services Home> button.

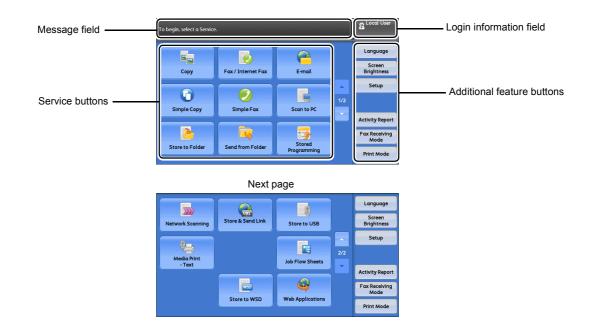

Message Field

Displays a message.

Login Information Field

Select this field in the upper right corner of the touch screen to display the User ID entry screen for entering System Administration mode, Authentication mode, or Accounting mode.

When a user is authenticated, the login information is displayed in this field.

- You can also press the <Log In/Out> button on the control panel to enter Authentication mode.
 - To exit Authentication mode, press the <Log In/Out> button on the control panel. You can also select the login information field in the upper right corner of the touch screen.

For information on Authentication or Accounting mode, refer to "14 Authentication and Accounting Features" in the Administrator Guide.

Service Buttons

Allows you to set the features for each service.

∎Сору

You can set the features for the Copy service. For more information, refer to "Copy" (P.71).

Fax/Internet Fax

You can set the features for the Fax service. For more information, refer to "Fax" (P.153).

■E-mail

You can scan documents and send the scanned data as an e-mail attachment. For more information, refer to "E-mail" (P.257).

■Simple Copy

You can set the features for the Copy service. Selecting [Simple Copy] allows you to easily specify the basic copy features on a single screen.

For more information, refer to "Simple Copy" (P.81).

■Simple Fax

You can set the features for the Fax service. Selecting [Simple Fax] allows you to easily specify the basic fax features on a single screen.

• This service does not appear on the screen when the Server Fax service is enabled. For more information, refer to "Simple Fax" (P.180).

■Scan to PC

You can scan documents and send the scanned data to a network computer via the FTP or SMB protocol.

For more information, refer to "Scan to PC" (P.279).

Store to Folder

You can scan documents and save the scanned data in a folder of the machine. For more information, refer to "Store to Folder" (P.285).

Send from Folder

You can operate files stored in a folder of the machine. For more information, refer to "Send from Folder" (P.321).

Stored Programming

You can operate stored programs.

Stored Programming is a service that allows you to store settings that you expect to use frequently and call them with a single button operation. For more information, refer to "Stored Programming" (P.343).

Network Scanning (ApeosPort series models only)

You can scan documents after specifying a file (job template) saving scanning conditions, information on the forwarding destination server, and others. For more information, refer to "Network Scanning" (P.277).

Store & Send Link

After you scan documents, the machine temporarily saves the scanned data and sends you an e-mail containing two URLs: one is for the location to retrieve the scanned data, and the other is for the location to delete the data.

For more information, refer to "Store & Send Link" (P.293).

• This service appears on the screen when the Authentication feature is enabled.

For information on how to display [Store & Send Link] on the [Services Home] screen, refer to "1 Before Using the Machine" > "Customizing the Control Panel" in the Administrator Guide.

Store to USB

You can scan documents and save the scanned data to a USB memory device. For more information, refer to "Store to USB" (P.287).

• This service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Media Print - Text

You can print document files (PDF, TIFF, DocuWorks, Docuworks binder, XML Paper Specification (XPS), and JPEG (JFIF)) after retrieving the files from a CompactFlash card or a USB memory device. You can also print the scan data stored with the Store to USB service.

For more information, refer to "Media Print (Text)" (P.357).

• This service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

■Store to WSD

You can scan documents set on the machine and save the scanned data from a computer. Also, you can save the scanned data to a computer on the network. For more information, refer to "Store to WSD" (P.296).

■Job Flow Sheets (ApeosPort series models only)

You can scan documents using a job flow sheet.

Job Flow Sheets is a service that allows you to set a flow of transfer settings of scan data for the efficient routine transfer.

For more information, refer to "Job Flow Sheets" (P.337).

Web Applications (ApeosPort series models only)

You can access to web applications via a network using the browser on the machine in order to display and store data.

For more information, refer to "Web Applications" (P.353).

• This service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Additional Feature Buttons

Allows you to set additional features that are not related to jobs.

■Language

You can select the language to be displayed on the touch screen.

The language selected here will be reset when the power is switched off and on.

Important • When you select [English], only ASCII characters can be used.

- When you set [Language] to [English] on the [Services Home] screen and an address book entry or contents of [Details] of Job Flow Sheets is entered in double-byte characters, the characters may not be displayed properly. When you use CentreWare Internet Services to import a CSV file* that includes double-byte characters other than the selected language, the characters in the file may be garbled or the import may fail.
- *: CSV (Comma Separated Values) is a file format that is often used for saving data by spreadsheets and database programs.
- Under [Default Language] in System Administration mode, you can select the standard language displayed on the touch screen when the power is switched on. For more information on how to set [Default Language], refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" > "Default Language" in the Administrator Guide.

■Screen Brightness

You can adjust the screen brightness of the touch screen.

■Lock Out Printer/Release Printer

You can set the machine to temporarily enable printing during the printer lockout period or to temporarily disable printing while [Release Printer] is displayed.

You can assign this button when [Printer Lockout] is set to [On] under [Tools] > [Common Service Settings] > [Machine Clock/Timers] and the [Allow User to Lock Out] check box is selected. For information on how to assign the feature to the button, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" in the Administrator Guide.

■Setup

You can create or update folders, job flows, and the Address Book. For more information, refer to "5 Tools" > "Setup" in the Administrator Guide.

■Activity Report

You can print an Activity Report to check if a transmission is successfully completed. For information on the contents listed in the Activity Report, refer to "16 Appendix" > "Activity Report" in the Administrator Guide.

■Fax Receiving Mode

You can specify a mode for receiving faxes.

For more information, refer to "4 Machine Status" > "Machine Information" > "Fax Receiving Mode" in the Administrator Guide.

■Print Mode

You can register a print mode and change its settings.

For more information, refer to "4 Machine Status" > "Machine Information" > "Print Mode" in the Administrator Guide.

Entering Text

During operations, a screen for entering text sometimes appears. The following describes how to enter text.

Folder N	ame	•										3	🕻 Ca	ncel	_	🖉 🤣 Save
																😒 Delete T
• 1	2		3	4	5		6	7	•	8	g		0	•		Backspace
۰ (c		w	e		r]	t		у	u		i]	0	F		[
	a		5	d	f		g	H	1	j	k	:	ι	;		• @
Shift		z	×	T	c	v	r	b	n		m	,	1.	1	1	Shift
More Ch	aract	ers	7			Sp	ace			Ĩ	4		mþ			

You can enter the following characters: numerals, alphabets, and symbols.


Item	Description				
Entering alphabets and numerals	To enter uppercase letters, select [Shift]. To return to the lowercase letters, select [Shift] again.				
Entering symbols	Select [More Characters].				
	Note • Depending on the keyboard, you can select a symbol from the pull-up options displayed on the bottom left of the screen.				
Entering a space	Select [Space].				
Deleting characters	Select [Backspace] to delete one character at a time. Select [Delete Text] to delete all characters at once.				

Installing the Tray Attachment on Finisher-B1

When delivering A4 or B5 paper to the finisher tray without stapling, you can stack the outputs more neatly by installing the tray attachment supplied with the finisher tray.

1 Remove the tray attachment from the rear of the finisher tray.

2 Install the tray attachment onto the middle of the finisher tray as shown in the diagram.





3 Сору

This chapter describes the basic operation and features for the Copy service.

•	Copying Procedure	72
•	Operations during Copying	78
•	Simple Copy	81
٠	Сору	85
•	Image Quality	93
•	Layout Adjustment	96
•	Output Format	110
•	Job Assembly	141

Copying Procedure

This section describes the basic copy procedures. The following shows the reference section for each procedure.

Step 1 Loading Documents	72
Step 2 Selecting Features	74
Step 3 Entering a Quantity	75
Step 4 Starting the Copy Job	76
Step 5 Confirming the Copy Job in Job Status	77

Step 1 Loading Documents

The following two methods are available to load documents:

Document Feeder

- Single sheet
- Multiple sheets

Document Glass

- · Single sheet
- · Bound documents, such as books

Document Feeder

Document Feeder

The document feeder supports single and multiple sheet documents with sizes from $125 \times 110 \text{ mm}$ (Standard size: A5, A5⁽¹⁾) to $297 \times 432 \text{ mm}$ (Standard size: A3, $11 \times 17^{"}$).

The document feeder automatically detects standard size documents. For nonstandard size documents, enter the size on the [Original Size] screen.

For information on document sizes that can be detected automatically and how to enter a non-standard document size, refer to "Original Size (Specifying the Scan Size for the Document)" (P.101).

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on paper size settings, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

Document Type (Weight)	Number of Sheets
Lightweight paper (38 - 49 gsm)	110 sheets
Plain paper (50 - 80 gsm)	110 sheets
Heavyweight paper (81 - 128 gsm)	75 sheets


The document feeder accepts the following number of sheets.


Important • To avoid paper jams, use the document glass for folded or wrinkled documents, cut-andpasted documents, curled paper, or back carbon paper.

• 2-sided scanning of lightweight paper (38 - 49 gsm) is not supported.


For information on how to copy mixed sized documents, refer to "Mixed Size Originals (Scanning Different Size Documents Simultaneously)" (P.102).

- **1** Remove any paper clips and staples before loading a document.
- **2** Load the document face up (when the document is 2-sided, load the front side up) in the center of the document feeder.
 - Note The confirmation indicator lights up when the document is loaded correctly. If the indicator does not light, load the document again.
- **3** Adjust the document guides to match the size of the document loaded.





4 Raise the document stopper.



Document Glass

The document glass supports a single sheet, a book, or other similar documents with sizes from $15 \times 15 \text{ mm}$ to $297 \times 432 \text{ mm}$ (Standard size: A3, 11×17 ").

Important • Always close the document cover after using the document glass.

The document glass automatically detects standard size documents. For non-standard size documents, enter the size on the [Original Size] screen.


For information on document sizes that can be detected automatically and how to enter a non-standard document size, refer to "Original Size (Specifying the Scan Size for the Document)" (P.101).


The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on the paper size settings, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

▲ CAUTION

Do not apply excessive force to hold thick document on the document glass. It may break the glass and cause injuries.

- **1** Open the document cover.
 - Important Before loading a document, make sure that the touch screen is active. Otherwise, the machine may not properly detect the document size.
- **2** Load the document face down, and align it against the top left corner of the document glass.





- **3** Close the document cover.
 - When a standard size document is loaded on the document glass, the size of the document is displayed in the message field.

Step 2 Selecting Features

The following two services are available to copy documents.

■Simple Copy


Allows you to only select basic features to copy documents.

∎Сору

Allows you to make detailed settings to copy documents.

The following procedure uses [Copy] to describe how to select features. For information on Simple Copy, refer to "Simple Copy" (P.81).

- Note
- The features displayed on the screen depend on the configuration of your machine.
 - When the Authentication or Accounting feature is enabled, a user ID and passcode may be required. Ask your system administrator for the user ID and passcode.
- **1** Press the <Services Home> button.




<Services Home> button


2 Select [Copy].



3 If the previous settings still remain, press the <Clear All> button.



4 Select each tab, and configure features as necessary.

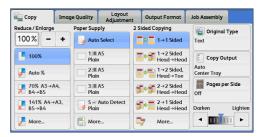


The following shows the reference section for each tab.

"Copy" (P.85) "Image Quality" (P.93) "Layout Adjustment" (P.96) "Output Format" (P.110) "Job Assembly" (P.141)

Step 3 Entering a Quantity

The following describes how to enter the number of copy sets. You can enter up to 999 sets.


 Enter the number of copies using the numeric keypad.
 The number of copies entered appears on the upper right of the touch screen.



Copy

3

2 If you have entered an incorrect value, press the <C (Clear)> button and then enter the correct value.



<C (Clear)> button


Step 4 Starting the Copy Job

Note

The following describes how to start a copy job.

- **1** Press the <Start> button.
 - Important If the document has been loaded in the document feeder, do not hold down the document while it is being conveyed.
 - Copies cannot be made if a copy protection code is detected. For information on copy protection codes, refer to "Secure Watermark (Managing Document Security)" (P.128).
 - Note If a problem occurs, an error message appears on the touch screen. Follow the instructions of the message to solve the problem.
 - You can set the next job while a copy job is being processed.






<Start> button


If you have more documents to copy, select [Next Original] on the touch screen while the current document is being scanned. This allows you to scan the documents as a single set of data.

- **2** Select [Next Original] while scanning is in progress.
 - When using the document feeder, load the next document after the machine has finished scanning the first document.
 - When [Next Original] is displayed on the screen shown on the right and no operation is performed for a certain period of time, the machine automatically assumes that there are no more documents.
 - You can change the number of copies by selecting [Change Quantity] that is displayed after selecting [Delete].

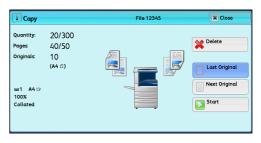

76

3 Load the next document.




- **4** Press the <Start> button. If you have more documents, repeat steps 3 and 4.
- **5** When all documents have been scanned, select [Last Original].



Step 5 Confirming the Copy Job in Job Status

If copies are not output after you start the copy job, the job may be in pending status. Use the following procedure to confirm the job status.

1 Press the <Job Status> button.



2 Confirm the job status.

Note

 Select [▲] to return to the previous screen or [♥] to move to the next screen.

Active	Jobs	Completed Jobs	Secure Print Jobs & More	Print Waiting J	Close
	l Jobs ob Type	Rem	iote Terminal	Status	Progress
00111	Print	A:B		Printing	11/22
02222	Сору	11x	22mm:3%	Copying	55/66

Operations during Copying


This section describes available operations during copying. The following shows the reference section for each operation.

Stopping the Copy Job	/8
Changing the Number of Copies	79
Interrupting the Copy Job	80

Stopping the Copy Job

To cancel a copy job in progress, use the following procedure.

1 Press either the <Stop> button on the control panel or [Delete] on the touch screen.






I Copy		File 12345	X Close
Quantity:	20/300		Delete
Pages:	40/50		× Delete
Originals:	10		
	(A4 🗅)		
ш1 А4 🕫			
100%		- F	Start
Collated			
		Change	
		Quantity	

2 Select [Delete].

■If [Delete] does not appear on the screen:


1 Press the <Job Status> button.



<Job Status> button

Copy

2 Select the job to cancel.

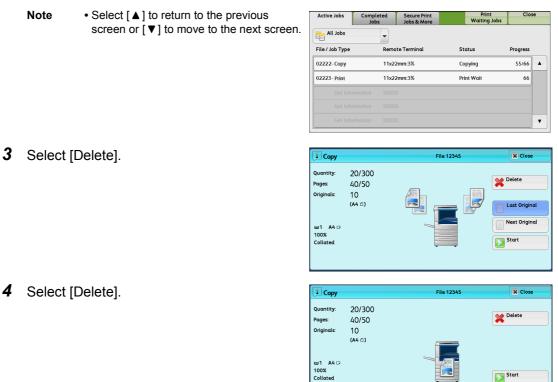


Changing the Number of Copies

To change the number of copy sets during scanning or copying, use the following procedure.

≡1 A4 ⊅ 100% Collated

1 Press either the <Stop> button on the control panel or [Delete] on the touch screen.

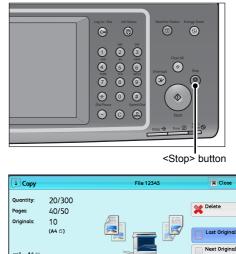

Change Quantity

Start

2 Select [Change Quantity].




3 Specify the number of copy sets with the numeric keypad. The new quantity must include the number of copies that have already been printed. You cannot enter a number less than the number of copies that have already been printed.

- 4 Press the <Start> button.
 - Note • If you enter the same value as the number of copies that have already been printed, the machine will not execute a copy job even when you press the <Start> button.

Interrupting the Copy Job

You can temporarily stop the copy job to have the machine process another job.

- Important Press the <Interrupt> button only after all the documents have been scanned. The machine does not accept another job while it is scanning documents, or when [Next Original] has been selected.
- Press the <Interrupt> button. 1 The <Interrupt> button lights up to indicate that the machine is in Interrupt mode.



<Interrupt> button

- **2** Load a document and set features if necessary.
- **3** Specify the number of copy sets with the numeric keypad.
- **4** Press the <Start> button.
- **5** After you have finished making the interrupt copy, press the <Interrupt> button.

The <Interrupt> button goes out to indicate that Interrupt mode is exited.

- Note • If you used the document glass to copy the document, remove the document from the document glass.
- 6 Press the <Start> button.

The suspended copy job is resumed.

Simple Copy

You can select [Copy] or [Simple Copy] on the [Services Home] screen to set the features for the Copy service.

This section describes the features you can select on the [Simple Copy] screen. [Simple Copy] allows you to use only basic features to easily copy documents. The following shows the reference section for each feature.

- Paper Supply (Selecting the Paper for Copying)81Reduce/Enlarge (Making Enlarged/Reduced Copies)822 Sided Copying (Making 2 Sided Copies)83Lighten/Darken (Adjusting the Copy Density)832 Pages per Side (Copying Two Pages onto One Sheet)841 Staple84
- **1** Select [Simple Copy] on the [Services Home] screen.



2 Select a feature on the [Simple Copy] screen.

👍 Paper Supply	•	☐ ↓ 1 → 1 Sided	
Auto Select		=or I→2 Sided	
Reduce / Enlarge 100%	•	2→2 Sided	
Darken Lig	hten	2 Pages per Side	

Paper Supply (Selecting the Paper for Copying)

Select a paper tray to be used.

This feature allows you to select the paper tray for copying.

1 Select [Paper Supply].

2

👍 Paper Supply	•	¢ 1→1 Sided		
Auto Select		□•		
Reduce / Enlarge 100%	•	∠+7 2→2 Sided		
	hten	12012 2 Pages per Side	1 Staple	
		Side		
	►	Side		
Simple Copy	×	Auto Select	4 A4 Plain	
Simple Copy Paper Supply Auto Select Reduce /	×	[4 3 A4	
Simple Copy Paper Supply Auto Select		Auto Select	4i≣A4 Plain 5 =∋ Bypass	

Auto Select

Automatically determines the tray holding the appropriate paper, based on the document size and the specified copy ratio.

• If you select [Auto Select], an option other than [Auto %] is selected in [Reduce/Enlarge].

■Trays 1 to 4, and Tray 6

Allows you to directly select the desired tray.

• Trays 3, 4, and 6 are optional.

■Tray 5 Bypass Auto Detect

Automatically detects the size of paper loaded in the bypass tray.

Checking the Remaining Amount of Paper in a Tray

The icons displayed in a tray allows you to check the remaining amount of paper loaded in the tray.

Simple Copy		XXXIIIIXA YAXXIIIIXA WAXAA KANA WAXAA KANA WAXAA KANA KANA KANA KANA KANA KANA KANA	
Auto Select	👍 Auto Select	☐ 4 🔳 A4 Plain	
Reduce /	1 🔳 A4 Plain	5 ≓ Bypass ∮ Auto Detect	You can view the icons to check the
Enlarge	2 🔳 A4 Plain	6 🔳 A4 Plain	remaining amount of paper in a tray.
Darken Lighten	3 🔳 A4 Plain	JL	

🔳 🔳 🔳 Indicates that the remaining amount of paper is 25 to 100%.


Indicates that the remaining amount of paper is 25% or less.

: Indicates that the tray has run out of paper, or no paper is loaded in the tray.

Reduce/Enlarge (Making Enlarged/Reduced Copies)

This feature allows you to select a copy ratio to enlarge or reduce the size of copies.

1 Select [Reduce/Enlarge].

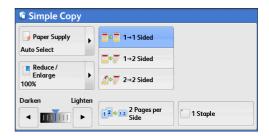

2 Select a copy ratio.

Simple Copy		
Auto Select	100%	№ A3→B4 № A4→B5
Reduce / Enlarge	🛃 Auto %	2 115% B4→A3 B5→A4
100%	<mark>,</mark> 70% A3→A4 B4→B5	<mark>⊿</mark> 122% A4→B4 A5→B5
Darken Lighten	H 81% B4→A4 B5→A5	A4→A3 B5→B4 B5→B4 A4→A3 B5→B4 A4→A3 A4→A3
	·[

■100%

Copies at the same image size as the original document.

■Auto %

Automatically determines the copy ratio based on the document size and the paper size specified in [Paper Supply], and copies the document to fit into the paper.

Note • If you select [Auto %], an option other than [Auto Select] is selected in [Paper Supply].

Ratios

Allows you to select from preset copy ratios.

2 Sided Copying (Making 2 Sided Copies)

This feature allows you to copy 1-sided and 2-sided documents on one side or both sides of paper.

1 Select any option.



Copy S

■1 → 1 Sided

Makes a copy of a 1-sided document on one side of the paper.

■1 → 2 Sided

Makes a copy of a 1-sided document on both sides of the paper.

■2 → 2 Sided

Makes a copy of a 2-sided document on both sides of the paper.

Lighten/Darken (Adjusting the Copy Density)

This feature allows you to select a copy-density level from seven levels.

1 Use $[\blacktriangleleft]$ and $[\blacktriangleright]$ to set the density level.

C Simple Copy	-		<u>`</u>
👍 Paper Supply		□ ↓ 1 → 1 Sided	
Auto Select		+7 1→2 Sided	
Reduce / Enlarge 100%	•	Ž∳⊽ 2→2 Sided	-
Darken Ligh	ten	12 4 12 2 Pages per Side	1 Staple

2 Pages per Side (Copying Two Pages onto One Sheet)

This feature allows you to copy two pages of a document together onto one side of a single sheet of paper.

When you select [2 Pages per Side], [Auto %] is automatically selected in [Reduce/ Enlarge]. The machine automatically sets the copy ratio and makes copies of the images so that they fit on the selected paper.

- When you deselect [Auto %] in [Reduce/Enlarge] (when you select another copy ratio), image loss may occur depending on the image size of the document.
 - Select a tray other than [Auto Select] in [Paper Supply]. When you select [Auto Select], the tray containing A4 paper is selected. If no tray contains A4 paper, the machine selects a tray based on the [Auto Paper Off] setting. For information on [Auto Paper Off], refer to "5 Tools"
 "Copy Service Settings" > "Copy Control" > "Auto Paper Off" in the Administrator Guide.

For information on how to copy four or eight pages of a document together onto one side of a single sheet of paper, refer to "Pages per Side (Copying Multiple Pages onto One Sheet)" (P.116).

1 Select [2 Pages per Side].

👍 Paper Supply	•	■ P = 1→1 Sided	
Auto Select		• 7 1→2 Sided	
Reduce / Enlarge 100%	•	2 →2 Sided	
Darken Lig	hten	12 + 12 2 Pages per	-) [

1 Staple

This feature allows you to select whether to staple copied outputs at the top left corner.

The number of sheets that can be stapled is 2 - 50 (when 80 gsm paper is used). Available paper types are: Plain (60 - 105 gsm), Reload (60 - 105 gsm), Recycled (60 - 105 gsm), Punched (60 - 105 gsm), Letterhead (60 - 105 gsm)*, Pre-printed (60 - 105 gsm), Lightweight (56 - 59 gsm), Heavyweight (106 - 169 gsm), Extra Heavyweight (170 - 216 gsm), Bond (170 - 216 gsm), and Custom Paper 1 to 5.

- Note
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- 1 Select [1 Staple].

Simple Copy			
👍 Paper Supply	•	■o 1→1 Sided	
Auto Select		arr 1→2 Sided	
Reduce / Enlarge 100%	•	2→2 Sided	
Darken Ligh	ten	2 Pages per Side	1 Staple

Сору

You can select [Copy] or [Simple Copy] on the [Services Home] screen to set the features for the Copy service.

This section describes the features you can select on the [Copy] screen. The following shows the reference section for each feature.

Reduce/Enlarge (Making Enlarged/Reduced Copies)	85
Paper Supply (Selecting the Paper for Copying)	89
2 Sided Copying (Making 2 Sided Copies)	91
Original Type (Selecting the Document Type)	91
Copy Output (Specifying Finishing Options)	92
Pages per Side (Copying Multiple Pages onto One Sheet)	92
Lighten/Darken (Adjusting the Copy Density)	92

You can customize the layout of the features displayed on the [Copy] screen. For more information, refer to "5 Tools" > "Copy Service Settings" > "Copy Tab - Features Allocation" in the Administrator Guide.

1 Select [Copy] on the [Services Home] screen.



2 Select a feature on the [Copy] screen.

🖕 Сору	Image Quality	Layout Adjustment	Output Format	Job Assembly
Reduce / Enlarge	Paper Sup		Sided Copying	Griginal Type Text
📮 100%	1 = Plain 2 = Plain	1 A5	1→2 Sided Head→Head 1→2 Sided, Head→Toe	Copy Output Auto Center Tray
70% A3→A4 B4→B5	- Plair	1	ji ⊳ji 2→2 Sided Heαd→Heαd	Pages per Side
141% A4→# B5→B4 More	A3,	· · · · · · · · · · · · · · · · · · ·	2→1 Sided Head→Head 7 More	Darken Lighter

Reduce/Enlarge (Making Enlarged/Reduced Copies)

This feature allows you to select a copy ratio to enlarge or reduce the size of copies.

 Specify a copy ratio. You can use the numeric keypad to specify a value, or [+] and [-] to specify reduction/enlargement ratios directly.

ᡖ Сору	Image Quality	Layout Adjustment	Output Format	Job Assembly
Reduce / Enlarge	Paper Sup		Sided Copying	Griginal Type Text
100%	1. Plain	1	=of 1→2 Sided Head→Head	Copy Output
🛃 Auto %	2≣ Plair		I→2 Sided, Heαd→Toe	Center Tray
70% A3→A B4→B5	4, 3 Ill Plain		3 P→ 3 2→2 Sided Head→Head	Pages per Side
141% A4→) B5→B4	A3, 5≓ ∮Plair	Auto Detect	≇∘≡ 2→1 Sided Head→Head	Darken Lighten
🛃 More	📑 🔂 Mor	e	🕎 More	

■100%

Copies at the same image size as the original document.

■Auto %

Automatically determines the copy ratio based on the document size and the paper size specified in [Paper Supply], and copies the document to fit into the paper.

Note • If you select [Auto %], an option other than [Auto Select] is selected in [Paper Supply].

■Ratios (3rd and 4th buttons)

Displays preset copy ratios.

You can change the copy ratio associated with each button. For information on the settings, refer to "5 Tools" > "Copy Service Settings" > "Preset Buttons" > "Reduce/Enlarge - Button 3 - 4" in the Administrator Guide.

■More

Displays the [Reduce/Enlarge] screen on which you can set [Proportional %], [Independent X - Y%], and [Calculator %].

For information on the settings on the [Reduce/Enlarge] screen, refer to "When [Proportional %] is Selected" (P.86), "When [Independent X - Y%] is Selected" (P.87), or "When [Calculator %] is Selected" (P.88).

When [Proportional %] is Selected

You can select a ratio from the standard copy ratios, or can enter a ratio directly.

1 Select a copy ratio, or specify a value.

Reduce / Enlarg		💢 Cancel	🥜 Save	
	Variable %	Preset %		
Proportional %	25 ↔ 400% +	100%	86% / A4→B	\3→B4, 5
Independent X - Y%	100 -	Auto %	115% B5→A	B4→A3, 4
Calculator %		50% A3→A5, B4→B6	122% A5→B	A4→B4, 5
	SlightReduction (Improves Fit)	70% A3→A4, B4→B5	141% B5→B	A4→A3, 4
		81% B4→A4, B5→A5	200% B6→B	A5→A3, 4

■Variable %

Specify a ratio in the range from 25 to 400% in 1% increments. To specify a value, use the numeric keypad or [+] and [-]. Specifying "100%" allows you to make copies at the same image size as the original document.

When you make enlarged/reduced copies from standard sized documents on standard sized paper, the following copy ratios will be applied.

Сору							
	A6	B6	A5	B5	A4	B4	A3
Original							
A6	100%	122%	141%	173%	200%	245%	283%
B6	82%	100%	116%	142%	164%	200%	232%
A5	71%	86%	100%	122%	141%	174%	200%
B5	58%	70%	81%	100%	115%	141%	163%
A4	50%	61%	70%	86%	100%	122%	141%
B4	41%	50%	58%	70%	81%	100%	115%
A3	35%	43%	50%	61%	70%	86%	100%

How a document should be loaded depends on the size and orientation of the document. For more information, refer to "Step 1 Loading Documents" (P.72).

For information on paper that can be loaded, refer to "2 Paper and Other Media" > "Paper Types" in the Administrator Guide.

■Preset %

Select a copy ratio from the following options.

• 100%

Copies at the same image size as the original document.

Auto %

Automatically determines the copy ratio based on the document size and the paper size specified in [Paper Supply], and copies the document to fit into the paper.

Note • If you select [Auto %], an option other than [Auto Select] is selected in [Paper Supply].

Preset ratios

Select from the preset ratios.

You can change the copy ratio associated with each button. For information on the settings, refer to "5 Tools" > "Copy Service Settings" > "Reduce/Enlarge Presets" in the Administrator Guide.

■Slight Reduction (Improves Fit)


Select this check box to slightly reduce the specified copy ratio to copy the complete image onto the paper.

Important • If you select [Slight Reduction (Improves Fit)] and you do not want to erase the edges of the document, set the amount of edge erase to 0 mm. Note that if the amount is set to 0 mm, the edges of the copied document may get dirty. You can set [Edge Erase] on the [Layout Adjustment] screen. For more information, refer to "Edge Erase (Erasing Edges and Margin Shadows of the Document)" (P.103).

When [Independent X - Y%] is Selected

You can specify reduction/enlargement ratios for the width and length individually.

1 Select any option.

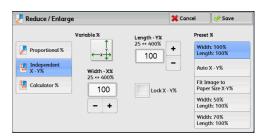

■Variable %

• Width - X%, Length - Y%

Allows you to specify reduction/enlargement ratios for the width and length in the range from 25 to 400% in 1% increments. Use [+] and [-] or the numeric keypad to specify a ratio.

■Lock X - Y%

Allows you to make the same ratio adjustment for the width and length at the same time.

■Preset %

Width: 100% / Length: 100%

Copies at the same image size as the original document.

• Auto X - Y%

Automatically determines the reduction/enlargement ratios for the width and length so that the document image fits in the paper.

• Fit Image to Paper Size X - Y%

Automatically determines the reduction/enlargement ratios for the width and length so that the document image fits in the paper, and then slightly reduces the ratios so that the complete image is copied onto the paper.

• Width: XX% / Length: XX%

Allows you to specify the preset reduction/enlargement ratios.

When [Calculator %] is Selected


You can specify values for the length and width individually.

If you specify both the original document size and the desired copy size, the copy ratios for the length and width are calculated automatically in the range from 25 to 400% according to the values that you entered.

Selecting [Calculator %] allows you to set copy ratios. The values entered in [Original Size] and [Copy Size] are used to calculate ratios, and do not reflect a scan size for the document or the paper size. Be sure to specify a scan size for the document. Also, select a paper tray if necessary.

For information on how to specify a scan size for the document, refer to "Original Size (Specifying the Scan Size for the Document)" (P.101). For information on how to select a paper tray, refer to "Paper Supply (Selecting the Paper for Copying)" (P.89).

 Enter the width of the original document in [Original Size] of [Width - X%] using the numeric keypad.

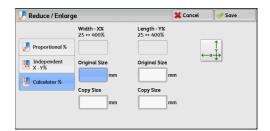

- **2** Enter the width of the output copy in [Copy Size] of [Width X%] using the numeric keypad.
- **3** In the same way, enter the length for [Original Size] and [Copy Size] of [Length Y%].

■Width - X% / Length - Y%

Displays the ratios that are automatically calculated using the values set in [Original Size] and [Copy Size].

Original Size

Allows you to enter the width and length of the original document, in the range from 1 to 999 mm in 1 mm increments.


■Copy Size

Allows you to enter the width and length of output copies, in the range from 1 to 999 mm in 1 mm increments.

Paper Supply (Selecting the Paper for Copying)

This feature allows you to select the tray that holds the paper you want to use.

1 Select a paper tray.

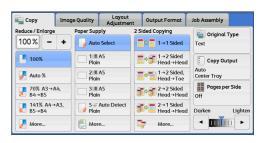

■Auto Select

Automatically determines the tray holding the appropriate paper, based on the document size and the specified copy ratio.

Note • If you select [Auto Select], an option other than [Auto %] is selected in [Reduce/Enlarge].

■Trays (2nd to 5th buttons)

Allows you to directly select the desired tray.

You can change the paper tray associated with each button on the [Copy] screen. For information on the settings, refer to "5 Tools" > "Copy Service Settings" > "Preset Buttons" > "Paper Supply - Button" in the Administrator Guide.

■More

Displays the [Paper Supply] screen. Refer to "[Paper Supply] Screen" (P.90).

Checking the Remaining Amount of Paper in a Tray

The icons displayed in a tray allows you to check the remaining amount of paper loaded in the tray.

🖕 Сору	Image Quality	Layout Adjustment	Output Format	Job Assembly	
Reduce / Enlarge	Paper Sup	ply 2 S	ided Copying	Griginal Type	
100% -	+ 🧳 Auto	o Select	� <mark>_</mark> 1→1 Sided	Text	
100%	1 III Plain		1→2 Sided Head→Head	Copy Output	
🛃 Auto %	2 2 III Plai	A5	1→2 Sided,	Auto Center Trav	You can view the icons to check the
70% A3→A4 B4→B5	i, 3.III Plain		2→2 Sided Head→Head	Pages per Side	remaining amount of paper in a tray
141% A4→A B5→B4 B5→	i3, 5≓ ∳Plai	Auto Detect	2→1 Sided Head→Head	Darken Lighten	
🛃 More	🔡 Mor	re	More	< min +	

- 🔳 🔳 🔳 🛛 Indicates that the remaining amount of paper is 25 to 100%.
 - : Indicates that the remaining amount of paper is 25% or less.
- : Indicates that the tray has run out of paper, or no paper is loaded in the tray.

[Paper Supply] Screen

This screen allows you to select a paper tray from all trays available on the machine.

1 Select a paper tray.

Γray	% Full	Size	Туре	Color	Size Detection	
2≡	75%	A3	Plain	White	Auto Detect	
3	50%	8К	Plain	White	Auto Detect	
4.⊞	100%	B5	🗌 Plain	White	Auto Detect	
5≓	Bypass	Auto Detect	Plain			
6 💻	25%	A4	🗌 Plain	White	Auto Detect	

■Tray

Allows you to select a paper tray. When [Bypass] is selected, the [Tray 5] screen is displayed where you can specify a paper type other than plain paper, and non-standard size paper.

For more information, refer to "[Tray 5] Screen" (P.90).

• Trays 3, 4, and 6 are optional.

■% Full

Displays the remaining amounts of paper loaded in the trays.

■Size

Displays paper sizes.

■Type

Displays paper types.

■Color

Displays paper colors.

For information on how to set [Paper Color], refer to "5 Tools" > "Common Service Settings" > "Paper Tray Settings" > "Paper Tray Attributes" in the Administrator Guide.

■Size Detection

Displays how the machine detects a paper size.


For information on how to set [Size Detection], refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

[Tray 5] Screen

Set the paper loaded in Tray 5.

For information on paper that can be loaded in Tray 5, refer to "2 Paper and Other Media" > "Paper Types" in the Administrator Guide.

- **1** Select a paper size and a paper type.
 - Note
- Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - [Auto Detect] is available only when standard sized paper is loaded.

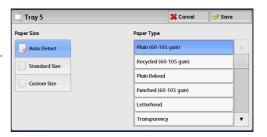

■Paper Size

Select from [Auto Detect], [Standard Size], and [Custom Size].

When you select [Auto Detect], the paper size is identified automatically.

When you select [Standard Size] or [Custom Size], refer to "When [Standard Size] is Selected" (P.91) or "When [Custom Size] is Selected" (P.91), respectively.

■Paper Type

Select a paper type.

When [Standard Size] is Selected

Select [Standard Size], and from the lists displayed, select a paper size and then a paper type.

1 Select a paper size and a paper type.

Note

 Select [▲] to return to the previous screen or [▼] to move to the next screen.


🛄 Τταγ 5				💢 Cancel	🛛 🎺 Save	
Paper Size			Paper Type			
👍 Auto Detect	A3 🕫		Plain (60-105	gsm)		
Standard Size	A4 🕫		Recycled (60	-105 gsm)		
	A4 0		Plain Reload			
Custom Size	A5 🕫		Punched (60-	105 gsm)		
	A6 D		Letterhead			
	B4 🕫	¥	Transparency	,		۲
			0			

When [Custom Size] is Selected

Enter the width and length of paper on the fields displayed after selecting [Custom Size].

Specify the X (width) in the range from 98 to 432 mm, and the Y (length) in the range from 89 to 297 mm in 1 mm increments.

- Important When copying on both sides of non-standard size paper, specify the size in the range from 182 to 432 mm for the X (width) direction and from 128 to 297 mm for the Y (length) direction.
- 1 Enter a paper size using [+] and [-] or the numeric keypad.

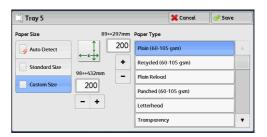

2 Select a paper type.

• Select [▲] to return to the previous screen or [▼] to move to the next screen.

2 Sided Copying (Making 2 Sided Copies)

This feature is the same as [2 Sided Copying] on the [Layout Adjustment] screen. For more information, refer to "2 Sided Copying (Making 2 Sided Copies)" (P.96).

Original Type (Selecting the Document Type)

This feature is the same as [Original Type] on the [Image Quality] screen. For more information, refer to "Original Type (Selecting the Document Type)" (P.93).

Copy Output (Specifying Finishing Options)

This feature is the same as [Copy Output] on the [Output Format] screen. For more information, refer to "Copy Output (Specifying Finishing Options)" (P.135).

Pages per Side (Copying Multiple Pages onto One Sheet)

This feature is the same as [Pages per Side] on the [Output Format] screen. For more information, refer to "Pages per Side (Copying Multiple Pages onto One Sheet)" (P.116).

Lighten/Darken (Adjusting the Copy Density)

This feature allows you to select a copy-density level from seven levels.

Note • [Lighten/Darken] on the [Copy], [Image Quality] and [Simple Copy] screens is the same.

1 Use $[\blacktriangleleft]$ and $[\blacktriangleright]$ to set the density level.

ᡖ Сору	Image Quality	Lαyout Adjustment	Output Format	Job Assembly
Reduce / Enlarge	Paper S	upply 2	Sided Copying	🔓 Original Type
100% -	+ 🧣 Ai	uto Select	©	Text
100%		am	∎⇔¶ 1→2 Sided Head→Head	Copy Output
🛃 Auto %		≣ A5 ain	∎∲ ¶ 1→2 Sided, Heαd→Toe	Auto Center Tray
70% A3→A4 B4→B5		≣ A5 ain	2→2 Sided Head→Head	Pages per Side
I41% A4→) B5→B4 B5→		≓ Auto Detect ain	2→1 Sided Head→Head	l Darken Lighter
🛃 More	📑 м	ore	🕎 More	

Image Quality

The section describes the features you can select on the [Image Quality] screen. The following shows the reference section for each feature.

Original Type (Selecting the Document Type)	. 93
Image Options (Adjusting Copy Density/Sharpness of Images)	. 94

- **1** Select [Copy] on the [Services Home] screen.
- **2** Select a feature on the [Image Quality] screen.




Copy Image Quality	Layout Adjustment	Output Format	Job Assembly
i Original Type Text	Image Option Lighten / Darken: N Sharpness: Normal		Background Suppression to Suppression

Original Type (Selecting the Document Type)

This feature allows you to select the type of documents, such as text and photos. By selecting a document type, you can make copies at optimum image quality.

1 Select [Original Type].

Select the document type.

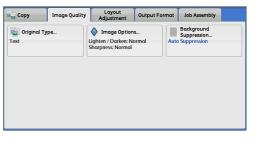

🖕 Original Type	X Cancel	🛷 Save
Photo & Text		
Text		
Photo		
Light Text		
Text on See- Through Paper		

■Photo & Text

Select this option to make copies of documents containing both text and photos. The machine automatically distinguishes the areas with text and those with photos, and sets the appropriate image quality for each area of the document.

■Text

2

Select this option to make sharp copies of text. This option is suitable for graphs and illustrations.

■Photo

Select this option to make copies of photos.

■Light Text

Select this option for text that requires enhancement, such as handwritten pencil text.

Text on See-Through Paper

Select this option to reduce blurring for tracing paper documents or to suppress background shadows of lightweight documents.

 Note
 [Text on See-Through Paper] may not be displayed depending on the setting made in System Administration mode. For information on how to display [Text on See-Through Paper], refer to "5 Tools" > "Copy Service Settings" > "Copy Control" > "Original Type - See-Through Paper" in the Administrator Guide.

Image Options (Adjusting Copy Density/Sharpness of Images)

This feature allows you to adjust the copy density and sharpness levels.

- **Note** [Lighten/Darken] under [Image Options] is the same as [Lighten/Darken] on the [Copy] screen.
- **1** Select [Image Options].



2 Adjust the copy density and sharpness.

🔷 Image Optic	ons			💢 Cancel	Save
Lighten / Darken		Sharpness			
	Lighten	♦	Sharpen		
+	Darken	<u>م</u> ا –	= Soften		

■Lighten/Darken

Allows you to select from seven copy density levels between [Lighten] and [Darken]. Moving the arrow mark to the upper position makes the copy density lighter, and moving to the lower position makes it darker.

Sharpness

Allows you to select from five sharpness levels between [Sharpen] and [Soften].

Selecting an upper cell on the bar makes the contours of images sharper, and selecting a lower cell makes them softer.

Background Suppression. Auto Suppression

Background Suppression (Erasing the Background Color of Documents)

This feature allows you to suppress the background color of documents, such as newspaper and colored paper.

🕞 Сору

Text

al Typ

Note • [Background Suppression] is not available when [Original Type] is set to [Photo].

1 Select [Background Suppression].

2 Select [Auto Suppression].

Background Su	ppression	💢 Cancel	🔶 Save
Off Auto Suppression	Auto Suppression hides bo Background Suppression of Photo is selected as the O		oleed-through

Image Quality Layout Adjustment Output Format Job Assembly

Image Options.

Lighten / Darken: Normal Sharpness: Normal

■Off

Scans the background of documents with no filtering.

■Auto Suppression

Suppresses the background of a document printed on colored paper, such as newspaper.

Layout Adjustment

This section describes the features you can select on the [Layout Adjustment] screen. The following shows the reference section for each feature.

2 Sided Copying (Making 2 Sided Copies)	
Book Copying (Copying Facing Pages onto Separate Sheets)	
2 Sided Book Copying (Making 2 Sided Copies of Facing Pages)	
Original Size (Specifying the Scan Size for the Document)	101
Mixed Size Originals (Scanning Different Size Documents Simultaneously)	102
Edge Erase (Erasing Edges and Margin Shadows of the Document)	103
Image Shift (Adjusting the Image Position)	105
Invert Image (Making Reversed Copies of Images)	107
Original Orientation (Specifying the Orientation of Loaded Documents)	108
Image Rotation (Changing the Orientation of Images)	108

1 Select [Copy] on the [Services Home] screen.



- **2** Select a feature on the [Layout Adjustment] screen.
 - Note Select [▲] to return to the previous screen or [▼] to move to the next screen.

🖕 Copy 🛛 🛛	Image Quality	Layout Adjustment	Output Format	Job Assembly	
2 Sided Copyi 1→1 Sided	ing	B Book Copying f		iided ok Copying	
Original Size Auto Detect	. Of]] Mixed Size Origi f	Top / Bo	ge Erase ottom: 2mm / 2mm ght: 2mm / 2mm Dmm	▲ 1/2 ▼
Side 1: Off Side 2: Off	No	Invert Image Irmal Image sitive Image	Dright	iginal Orientation Images	

–
2

2 Sided Copying (Making 2 Sided Copies)

This feature allows you to copy 1-sided and 2-sided documents on one side or both sides of paper.

- Important Ensure that the actual orientation of the original document matches the [Original Orientation] setting on the [Layout Adjustment] screen.
 - When Finisher-B1 or Finisher-C1 is installed, and if the loaded paper for 2-sided copying is a size other than the specified size, output copies are delivered to the center tray. Remove the paper delivered to the center tray every now and then.

1 Select [2 Sided Copying].

🖕 Copy 🛛 Image Qi	uality	Layout Adjustment	Output Fo	ormat	Job Assembly	
□7 2 Sided Copying 1→1 Sided	A Of	Book Copying			ded k Copying	
🕂 Original Size		Mixed Size Origi	nals	💶 Edg	e Erase	
Auto Detect	Of	F	Le		tom: 2mm / 2mm ht: 2mm / 2mm nm	1/3
🛃 Image Shift	3	Invert Image		🣴 Orig	inal Orientation	
Side 1: Off Side 2: Off		rmal Image sitive Image	U	lpright I	mages	

2 Select any option.

7 2 Sided Copying			💢 Cancel	🖉 🧇 Save
	Originals	¢ Copies		al Orientation
¢ 1→1 Sided	f Head to Hea	d 🧊 Head	to Head	Upright Images
1→2 Sided	Head to Toe	Head I	to Toe 💽	Sideways Images
2 ¢ 7 2→2 Sided				
2→1 Sided				

■1 → 1 Sided

Makes a copy of a 1-sided document on one side of the paper.

■1 → 2 Sided

Makes a copy of a 1-sided document on both sides of the paper.

$\blacksquare 2 \rightarrow 2 \text{ Sided}$

Makes a copy of a 2-sided document on both sides of the paper.

■2 → 1 Sided

Makes a copy of a 2-sided document on one side of the paper.

■Originals

This option is displayed when you select $[2 \rightarrow 2 \text{ Sided}]$ or $[2 \rightarrow 1 \text{ Sided}]$.

· Head to Head

Select this option when the front and back sides of the document are of the same orientation.

Head to Toe

Select this option when the front and back sides of the document are of the opposite orientation.

■Copies

This option is displayed when you select $[1 \rightarrow 2 \text{ Sided}]$ or $[2 \rightarrow 2 \text{ Sided}]$.

· Head to Head

Select this option when you want the orientation of the first and second sides of the copy to be the same as that of the document.

· Head to Toe

Select this option when you want the orientation of the first and second sides of the copy to be the opposite of that of the document.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top of the document against the left side of the document glass or document feeder.

Book Copying (Copying Facing Pages onto Separate Sheets)

This feature allows you to copy facing pages of a document on separate sheets of paper in page order.

This is useful when you need to make separate copies of facing pages of a bound document such as a booklet.

Note • You cannot use the document feeder with this feature.

- Non-standard size document and undetectable size documents may not be separated into two accurately.
- **1** Select [Book Copying].



2 Select any option.

 A B Book Copying
 Cancel
 Save

 Orf
 Book Copying allows scanning of facing pages.

 Both Pages copies the left and right pages of a book with a single press of Start. Left Page Only copies only the left page.

 Iten Right
 Select Left Page then Right, etc. to control reading order.

 Select Left Page then Right
 Select Left Page then Right, etc. to control reading order.

∎Off

Does not copy the document as a bound document.

■Left Page then Right

Copies the left page and then the right page of facing pages.

Book Copying		💢 Can	cel	🔗 Save
Off	A B Both Pages	Binding Edge Erase		e original on the Iment Glass Iown.
Right Page then Right Right Page then Left Top Page then Bottom	A Left Page Only	0↔50mm 0 - +	Ĭ	a Ar A B

Right Page then Left

Copies the right page and then the left page of facing pages.



■Top Page then Bottom

Copies the top page and then the bottom page of facing pages.

Book Copying	💥 Car	ncel	🛷 Save
Off A Both Pages Left Page A Top Page Only Bight Page then Right B Bottom Page B Bottom Page B Only Top Page	Binding Edge Erase	Doc	e original on the ument Glass hown.

■Both Pages

Copies both pages in page order.

■Left Page Only

Copies the left page only. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Right Page Only

Copies the right page only. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Top Page Only

Copies the top page only. You can select this option when [Top Page then Bottom] is selected.

Bottom Page Only

Copies the bottom page only. You can select this option when [Top Page then Bottom] is selected.

■Binding Edge Erase


Erases the shadow from the center section of the document. You can set the binding erase width in the range from 0 to 50 mm in 1 mm increments.

2 Sided Book Copying (Making 2 Sided Copies of Facing Pages)

This feature allows you to assign pages when making copies of facing pages in a bound document, such as a booklet, so that pages face each other in the same way as the document. You can also specify the starting and ending pages from the left and right of facing pages.

- **Note** Non-standard size documents and undetectable size documents may not be separated into two accurately.
 - Use the document glass to load the documents.

1 Select [2 Sided Book Copying].

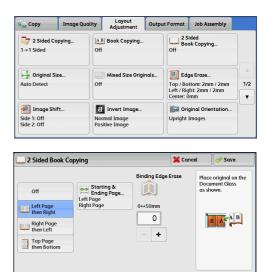

■Off

2

Disables this feature.

Select any option.

■Left Page then Right

Scans the left page and then the right page of facing pages, to make 2-sided copies.

Right Page then Left

Scans the right page and then the left page of facing pages, to make 2-sided copies.

■Top Page then Bottom

Scans the top page and then the bottom page of facing pages, to make 2-sided copies.

Starting & Ending Page

Displays the [Starting & Ending Page] screen. Refer to "[Starting & Ending Page] Screen" (P.100).

Binding Edge Erase

Erases the shadow from the center section of the document. You can set the binding erase width in the range from 0 to 50 mm in 1 mm increments.

[Starting & Ending Page] Screen

This screen allows you to set the starting and ending pages to be copied.

1 Set [Starting Page] and [Ending Page].

런 Starting & Ei	nding Page	💢 Cancel	Save
Starting Page	◆Ending Page	[Vace original on the Document Glass is shown.

Starting Page

[Left Page] / [Right Page]

You can select these options when [Left Page then Right] or [Right Page then Left] is selected.

[Top Page] / [Bottom Page]

You can select these options when [Top Page then Bottom] is selected.

■Ending Page

• [Left Page] / [Right Page]

You can select these options when [Left Page then Right] or [Right Page then Left] is selected.

• [Top Page] / [Bottom Page]

You can select these options when [Top Page then Bottom] is selected.

Original Size (Specifying the Scan Size for the Document)

This feature allows you to specify the scan size for a document.

Use this feature when a document is a non-standard size, or when you want to copy a document at a size different from the original size. You can also add margins, or delete unnecessary margins using this feature.

1 Select [Original Size].



2 Select the size of the document. If you select a non-standard size, specify values for the X and Y directions.

🕂 Original Size	,		💥 Cancel	🖉 🛷 Save
				15⇔297mm
Auto Detect	A6 🗅	11 x 17" 🗅		Auto
A3 🗆	B4 🗆	8.5 x 14 ⁻ 🖾	15++	432mm _
A4 🗆	B5 🗆	8.5 x 13" 🗆	A	ito
A4 🗅	8K 🗂	8.5 x 11⁻ ①	-	+
A5 🗆	16K 🗅	5 x 7" 🗆		

■Auto Detect

Detects the document size automatically. The following table shows the document sizes that can be detected automatically.

	Document feeder	Document glass
Auto-detectable Document Sizes	B5, B5엽, B4, A5, A5엽, A4, A4엽, A3, 8.5 x 11", 8.5 x 11"엽, 11 x 17", 16K엽, 8K	B6, B5, B5입, B4, A6, A5, A5입, A4, A4입, A3, 8.5 x 11"입, 11 x 17", 16K, 16K입, 8K

Note • If the document size cannot be detected automatically, a screen to enter the document size appears.

The document sizes that can be automatically detected depend on the [Paper Size Settings] made in System Administration mode. For more information, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

■Standard Size

Select a document size from preset options.

You can change the sizes displayed on the screen. For information on the settings, refer to "5 Tools" > "Copy Service Settings" > "Original Size Defaults" in the Administrator Guide.

■Variable Size

Enter the desired scan size when scanning a non-standard size document or when making copies at a size different from the original document size. You can specify a value in the range from 15 to 432 mm for the width (X), and a value in the range from 15 to 297 mm for the length (Y), in 1 mm increments. To help you specify values, use the scales attached on the upper and left edges of the document glass.

Important • When a document is loaded in the document feeder, the base point in the Y (length) direction is the center of the edge. If you specify 100 mm, the scan length will be from 50 mm above to 50 mm below the center of the document.

Mixed Size Originals (Scanning Different Size Documents Simultaneously)

You can scan documents of various sizes simultaneously and make copies of the corresponding sizes or of one selected size. To use this feature, load the documents in the document feeder.

Important • Load documents in landscape orientation. However, always load A5 documents in portrait orientation.

- When loading B5 documents together with A3 documents loaded in landscape orientation or A4 documents loaded in portrait orientation, load B5 documents in portrait orientation.
- If the top left corners of the documents are not aligned properly, the documents may not be scanned correctly.
- The recommended document size combinations are A4 portrait and A3 landscape, or B5 portrait and B4 landscape. If another combination of document sizes is used, the documents can be fed at an angle and may not be copied properly.
- **1** Select [Mixed Size Originals].

🖕 Сору	Image Qu	ality	Layout Adjustment	Output	Format	Job Assembly	
□ 7 2 Sided Co 1→1 Sided	opying	Off	Book Copying			ided ok Copying	
🕂 Original S	ize		Mixed Size Origi	nals		ge Erase	
Auto Detect		Off				ttom: 2mm / 2mm ht: 2mm / 2mm mm	1/2
🛃 Image Sh	ift	8	Invert Image		🚺 Ori	ginal Orientation	
Side 1: Off Side 2: Off			rmal Image sitive Image		Upright	Images	

2 Select [On].

■Off

Select this option when copying documents of the same size.

∎On

When documents of different sizes are copied, the machine automatically detects the size of each document.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- Note
- The [Original Orientation] setting is based on the orientation of the first page of a document. Load the second and subsequent pages of the document based on this setting.
 - If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.

Copy က

• Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Edge Erase (Erasing Edges and Margin Shadows of the Document)

When you copy a document with the document cover open or when you copy a book, the edges and center margin of the document may be printed as black shadows. The Edge Erase feature allows you to erase such shadows.

- Note For 2-sided originals, the same edge erase amounts are set for the front and back sides.
 - If you set [Reduce/Enlarge], the edge erase amounts will be reduced or enlarged in proportion to the ratio you specified.
 - The binding shift specified in [Booklet Creation] will not affect the edge erase amounts.
 - If the original is placed on the document glass and [1→2 Sided] is selected when using the 2 Sided Copying feature, symmetrical edge erase amounts on both sides are not applied to the output even if [Individual Edges] is specified and [Mirror Side 1] is selected for the [2 Sided Original Side 2] option.

Even when the edge erase amount is set to 0 mm, full page copying is not possible. For information on the areas that can actually be printed, refer to "16 Appendix" > "Printable Area" in the Administrator Guide.

1 Select [Edge Erase].

🖕 Сору	Image Qu	ality	Layout Adjustment	Output F	ormat	Job Assembly	
□ 7 2 Sided 0 1→1 Sided	Copying	A E Off	Book Copying			ided ok Copying	
🕂 Original Auto Detect	Size	Off	Mixed Size Origi	1	Fop / Bot	je Erase ttom: 2mm / 2mm	1/
					.eft / Rig Center: 0	ht: 2mm / 2mm mm	•
🛃 Image S	hift	В	Invert Image		🚺 Oriç	ginal Orientation	
Side 1: Off Side 2: Off			mal Image itive Image	l	Jpright I	Images	

2 Select	any	option.
----------	-----	---------

🛂 Edge Eras 💥 Cancel 🛛 🥜 Save Erase Value 0 ↔ 50mr Original Orientation Mormo **1** 🔥 Upright Image All Edges Sideways Images 📤 All Edge 2 0 Indivi Edges - + + 🙆 Parallel Edge

■Normal

The edge width to erase is set to 2 mm for the top and bottom, and left and right edges.

■All Edges

Erases the shadows of the four edges of the document, as well as the shadow in the center of the document if it is a bound document or a booklet. You can specify values for [All Edges] and [Center] individually.

Individual Edges

Erases the shadows of the top, bottom, left, and right edges of the document, as well as the shadow in the center of the document if it is a bound document or a booklet. You can specify values for [Top], [Bottom], [Left], [Right], and [Center] individually.

■Parallel Edges

Erases the shadows of the top and bottom edges, and left and right edges of the document, as well as the shadow in the center of the document if it is a bound document or a booklet. You can specify values for [Top & Bottom], [Left & Right], and [Center] individually.

Erase Value

Allows you to specify values to erase the edges of the document.

All Edges

Erases the shadows of the four edges of the document according to the orientation of the loaded document. You can specify the edge width you want to erase in the range from 0 to 50 mm in 1 mm increments.

Top & Bottom (Top/Bottom)

Erases the shadows of top and bottom edges of the document according to the orientation of the loaded document. You can specify the edge width you want to erase in the range from 0 to 50 mm in 1 mm increments.

Left & Right (Left/Right)

Erases the shadows of left and right edges of the document according to the orientation of the loaded document. You can specify the edge width you want to erase in the range from 0 to 50 mm in 1 mm increments.

Center

Erases the shadow in the center of facing pages of a bound document or a booklet. You can set the binding erase width in the range from 0 to 50 mm in 1mm increments.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

■2 Sided Original - Side 2

You can select this option when [Individual Edges] is selected. Select whether to set the same edge erase amount for both Side 1 and Side 2.

Same as Side 1

The same value is set as the edge erase amount for Side 1 and Side 2.

Mirror Side 1

The edge erase amounts for Side 1 and Side 2 are set symmetrically.

Image Shift (Adjusting the Image Position)

This feature allows you to shift the position of document images so that the images are placed on the left, right, top, bottom, or center of paper. You can also adjust the amounts of the left, right, top, and bottom margins. If you are making 2-sided copies, you can adjust the image positions for Side 1 and Side 2 individually.

- The image shift amount is set in accordance with the paper, and does not affect the setting made in [Reduce/Enlarge].
- **1** Select [Image Shift].

2 Select any option.

Сору	Image Quality	Layout Adjustment	Output Form	nat Job Assembly	
2 Sided Co 1→1 Sided	pying	B Book Copying f	off	2 Sided Book Copying	
Original Size Auto Detect		Mixed Size Originals Off		Edge Erase Top / Bottom: 2mm / 2mm Left / Right: 2mm / 2mm Center: 0mm	
Image Shift Side 1: Off Side 2: Off	N	I Invert Image ormal Image isitive Image	_	Original Orientation ight Images	

🛃 Image Shift			🔀 Cancel	🖉 🛷 Save
			Origin	al Orientation
off	Side 1	2 Side 2		Upright Images
Auto Center			•	Sideways Images
Margin Shift				
	_			
		Mirror Sid	le 1	

Copy C

∎Off

Does not shift the position of document images.

■Auto Center

Shifts document images so that they are placed in the center of the paper.

■Margin Shift

Allows you to specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

Side 1

Displays the [Image Shift - Side 1] screen.

Refer to "[Image Shift - Side 1] Screen" (P.106).

Side 2

Displays the [Image Shift - Side 2] screen.

Refer to "[Image Shift - Side 2] Screen" (P.106).

Mirror Side 1

Select this check box when you want the positioning of Side 2 to match the positioning of Side 1.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

Note • If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.

• Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

[Image Shift - Side 1] Screen

This screen allows you to set the image shift settings for Side 1.

1 Select any option.



■Off

Does not shift the position of document image.

Auto Center

Shifts document images so that they are placed in the center of the paper.

Specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

Corner Shift

Shifts document images so that they are placed at an edge or corner of the paper. You can select from 8 shift directions.

Specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

■Margin Shift

Allows you to specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

[Image Shift - Side 2] Screen

This screen allows you to set the image shift settings for Side 2.

1 Select any option.

💢 Cancel 🔗 Sa	ve
50 ↔ 0 ↔ 50mm 0 - +	
0mm	
] • 5 •	50 ↔ 0 ↔ 50mm 0 - +

■Off

Does not shift the position of document image.

Copy

3

■Auto Center

Shifts document images so that they are placed in the center of the paper.

Specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

■Corner Shift

Shifts document images so that they are placed at an edge or corner of the paper. You can select from 8 shift directions.

Specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

■Margin Shift

Allows you to specify the amounts of the top and bottom, and left and right margins in the range from 0 to 50 mm in 1 mm increments.

Invert Image (Making Reversed Copies of Images)

This feature allows you to reverse the left and right sides of the document image or to reverse the density of the document image when making copies.

- Note When [Negative Image] and [Edge Erase] are set simultaneously, the edge erase area turns to white.
- **1** Select [Invert Image].

🖕 Сору	Image Qua	lity	Layout Adjustment	Output	Format	Job Assembly	
□ 7 2 Sided C 1→1 Sided	opying	A B Off	Book Copying		Diff 2 Si Off	ded k Copying	
Original Size Auto Detect		Mixed Size Originals Off		nals	Top / Bottom: 2mm / 2mm Left / Right: 2mm / 2mm Center: 0mm		1/2
			E Invert Image Normal Image Positive Image		🚺 Oriç Upright I	jinal Orientation mages	

2 Select any option.

 Invert Image
 Cancel
 Save

 Mirror Image
 Negative Image

 B Normal Image
 B Positive Image

 Image
 Image

 Image
 Image

■Mirror Image

Reverses the left and right sides of the document image.

■Negative Image

Reverses the density of the document image.

Original Orientation (Specifying the Orientation of Loaded Documents)

This feature allows you to specify the orientation of a document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- **1** Select [Original Orientation].

🖕 Сору	Image Qu	ality	Layout Adjustment	Outpu	t Format	Job Assembly	
□ 7 2 Sided C 1→1 Sided	Copying	Off	Book Copying			ided ok Copying	
Original Size Auto Detect		off	Mixed Size Origi	nals	Top / Bo	ge Erase ttom: 2mm / 2mm ht: 2mm / 2mm	
Jimage Sl Side 1: Off Side 2: Off	hift		Invert Image mal Image itive Image			ginal Orientation	

2 Select [Upright Images] or [Sideways Images] according to the orientation of the document loaded.

📮 Original Oriental	tion		💢 Cancel	🛷 Sαve
	Upright Images	system of you paper as you or place it on This informati decisions abo images on pa Image Shift, E	ut how to accur	ntation on the cument Feeder ilass. e system to make ately place features such as 25 per Side,

Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Image Rotation (Changing the Orientation of Images)


If the orientation of the paper currently loaded in the tray differs from that of the document loaded, the machine automatically rotates the document image so that the orientation of the image matches that of the paper. You can also select a reference position for image rotation if documents are of mixed orientations.

This feature is available only when you make copies on A4, 8.5 x 11", or smaller size paper.

1 Select [Image Rotation].

Сору	Image Quality	Layout Adjustment	Output Format	Job Assembly	
📑 Image Rot	ation				
On during Auto Staple Position					
(
					2/2
					v

2 Select any option.

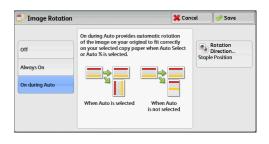

■Off

Copies documents as they are, even if the orientation of the images does not match that of the paper.

■Always On

Automatically rotates document images so that the orientation of the images matches that of the paper.

■On during Auto

Automatically rotates document images so that the orientation of the images matches that of the paper only when [Auto %] is selected in [Reduce/Enlarge], or when [Auto Select] is selected in [Paper Supply].


Rotation Direction

Displays the [Image Rotation - Rotation Direction] screen. Refer to "[Image Rotation - Rotation Direction] Screen" (P.109).

[Image Rotation - Rotation Direction] Screen

This screen allows you to set the reference position for rotation.

1 Select any option.

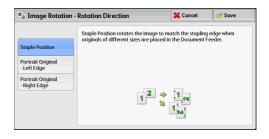

■Staple Position

This option is displayed when the finisher is installed. If documents are of mixed orientations, the images will be rotated to match the stapling edge specified in the settings of the Staple feature.

■Portrait Original - Left Edge

If documents are of mixed orientations, the images will be rotated so that the top edge of landscape documents is aligned with the left edge of portrait documents.

■Portrait Original - Right Edge

If documents are of mixed orientations, the images will be rotated so that the top edge of landscape documents is aligned with the right edge of portrait documents.

Output Format

This section describes the features you can select on the [Output Format] screen. The following shows the reference section for each feature.

10
11
14
16
17
18
19
26
28
31
32
33
35
39

1 Select [Copy] on the [Services Home] screen.



2 Select a feature on the [Output Format] screen.

Note

 Select [▲] to return to the previous screen or [♥] to move to the next screen.

Copy I	mage Quality	Layout Adjustment Ou	Itput Format Job Assembly	
□ 7 2 Sided Copyi 1→1 Sided	ng Of	Booklet Creation	Off Covers	
Pages per Side Off	e	Poster	Repeat Image Off	1/3
# Annotations	. of		Secure Watermark	

🙀 Сору	Image Quality	Layout Adjustment	Outpu	t Format	Job Assembly	
🗍 Folding Off	of	Preset Repeat In f	nage	Off	insparency tions	
Copy Outp Auto Center Tray	ut	🚹 ID Card Copy				2/
,]			V

2 Sided Copying (Making 2 Sided Copies)

This feature is the same as [2 Sided Copying] on the [Layout Adjustment] screen. For more information, refer to "2 Sided Copying (Making 2 Sided Copies)" (P.96).

Booklet Creation (Creating a Booklet)

This feature lays out pages so that booklets are formed when the output sheets are folded in half. You can also set the binding shift settings and attach a cover when making booklets.

When the Finisher-C1 with Booklet Maker (optional) is installed, you can also fold the output sheets in half, or staple the folded output sheets.

When the Booklet Maker Unit for Finisher-B1 (optional) is installed, you can also crease the output sheets in half, or staple the creased output sheets.

- **Important** Ensure that the actual orientation of the original document matches the [Original Orientation] setting on the [Layout Adjustment] screen.
 - When Finisher-B1 or Finisher-C1 is installed, do not remove outputs from the finisher tray until all the output sheets have been delivered.
- Note
 The machine copies four pages of the document onto one sheet of paper. If the number of pages in the booklet is not a multiple of four, the remaining pages will be output as blank pages.
 - If [Auto Select] is selected in [Paper Supply], a tray specified in [Auto Paper Off] is automatically selected. Change the setting if necessary. For information on [Auto Paper Off], refer to "5 Tools" > "Copy Service Settings" > "Copy Control" in the Administrator Guide.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Specify the orientation of the document in [Original Orientation] on the [Layout Adjustment] screen.



2 Select [Booklet Creation] on the [Output Format] screen.



Booklet Creation	1	💥 Cancel	l 🤣 🔗 Save
	Covers	Binding Shift	Divide Outpu
Off	Off		Off
Create Left/Top Bound Booklet	D Blank Cover	🏹 Fold & Staple Off	
Create Right Bound Booklet	Print on Both	Paper Supply	
Copy Booklet	1 Sided Covers Print Outside	Covers: 5≓ Auto Detect Plain	
	Last Page on Back Cover	Main Body: 1)≣A4 □ Plain	

■Off

3

Disables this feature.

Select any option.

■Create Left/Top Bound Booklet

Copies are made to enable left binding or top binding.

Create Right Bound Booklet

Copies are made to enable right binding.

■Copy Booklet

You can output the copies of scanned documents as they are by specifying [Fold & Staple]. Select this option when you do not need a document to be copied in booklet page order.

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

Covers

You can attach covers to a booklet.

• Off

No cover is attached.

Blank Cover

A blank sheet of paper is attached as the cover.

· Print on Both

The first and second pages of the document are copied on both sides of the cover.

1 Sided Covers Print Outside

The first and last pages of the document are copied on the front side of the cover.

Last Page on Back Cover

Select this check box to copy the image of the last document page onto the last page of the copy sheets as a back cover. When you use [Divide Output] to divide a booklet into subsets, the image of the last document page will be copied onto the last page of the last subset.

 Depending on the number of pages in the original document, a blank page may be inserted before the last page of a booklet.

Binding Shift

Displays the [Booklet Creation - Binding Shift] screen. Refer to "[Booklet Creation - Binding Shift] Screen" (P.113).

Divide Output

Displays the [Booklet Creation - Divide Output] screen. Refer to "[Booklet Creation - Divide Output] Screen" (P.113).

Fold & Staple

Displays the [Booklet Creation - Fold & Staple] screen.

Refer to "[Booklet Creation - Fold & Staple] Screen" (P.113).

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

Paper Supply

Displays the [Booklet Creation - Paper Supply] screen.

Select the tray to be used for body pages from [Main Body Tray], and the tray for cover pages from [Cover Tray]. Select the same size of paper for [Main Body Tray] and [Cover Tray], and also select the trays with paper loaded in landscape orientation (\Box). When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Note

[Booklet Creation - Binding Shift] Screen

This screen allows you to specify the binding shift value in the range from 0 to 50 mm in 1 mm increments.

1 Use [+] and [-] or the numeric keypad to specify a binding shift value.



[Booklet Creation - Divide Output] Screen

When you have a large number of originals, the originals are divided to create subsets to reduce the thickness of each booklet. The machine folds copies in half, and piles them up to form a booklet.

You can specify the number of sheets in the range from 1 to 50 in 1 sheet increments.

Note • When you specify the folding feature, specify the dividing number of sheets in the range from 1 to 15.


Booklet Creatio	n - Divide Output	🗱 Cancel	🛷 Save
💓 Off	Sheets per Subset 1 + 50		

2 Specify the number of sheets using [+] and [-] or the numeric keypad.

[Booklet Creation - Fold & Staple] Screen

When the Booklet Maker Unit for Finisher-B1 (optional) or the Finisher-C1 with Booklet Maker (optional) is installed, [Fold Only] and [Fold & Staple] become available.

1 Select any option.

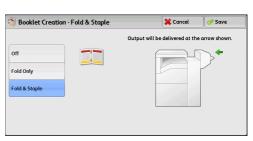

■Off

No finishing is carried out.

Fold Only

• When the Booklet Maker Unit for Finisher-B1 (optional) is installed:

The copies are creased in half. The number of copies that can be creased is up to 5. When the number is more than 5, the document is divided by every 5 sheets.

• When the Finisher-C1 with Booklet Maker (optional) is installed:

The copies are folded in half. The number of copies that can be folded is up to 5. When the number is more than 5, the document is divided by every 5 sheets.

■Fold & Staple

• When the Booklet Maker Unit for Finisher-B1 (optional) is installed:

The copies are creased in half and stapled at the center. The number of copies that can be creased and stapled is 2 to 15.

• When the Finisher-C1 with Booklet Maker (optional) is installed:

The copies are folded in half and stapled at the center. The number of copies that can be folded and stapled is 2 to 15.

Covers (Attaching Covers to Copies)

This feature allows you to attach covers to copies.

You can use different types of paper (such as colored paper and heavyweight paper) as the front and back covers of copies.

- Important When you select this feature, if the number of pages scanned by the machine exceeds the maximum, the machine will not print the already-scanned data. In that case, follow the instructions of the message displayed on the screen to cancel the job. The maximum number of pages that the machine can scan is 999 pages per job.
 - If [Covers] is set concurrently with [Booklet Creation], only plain paper can be used for the covers.
- This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Covers].

🖕 Сору	Image Quality	Layout Adjustment	Output Forma	t Job Assembly	
□ 7 2 Sided Co 1→1 Sided		🔰 Booklet Creati ff	on Off	Covers	
Pages per S Off	Side	Poster ff	off	Repeat Image	1/2
# Annotation	ns	Watermark	off	Secure Watermark	•

2 Select any option.

💥 Cancel Covers 🖉 🤣 Save Front Cove Back Cove 合 Paper Supply... Off Off Front Cover: 5 ≓ Auto Detect Plain Blank Cove Blank Cove Back Cover: 5 ≓ Auto Detect Plain Main Body: 1)≣A4 □ Plain 📅 Print on Side 🗾 Print on Side 1 Load back cover origina Print on Side 📝 Print on Side 2 **₽**).◆{ Print on Both Print on Both

Front Cover

Attaches a front cover to the copies.

• Off

No front cover is attached.

Blank Cover

Blank sheets of paper are attached as front covers.

Print on Side 1

The first page of the document is copied on the front side of the front cover.

• Print on Side 2

The first page of the document is copied on the back side of the front cover.

Print on Both

The first and second pages of the document are copied on the front and back sides of the front cover.

■Back Cover

Attaches a back cover to the copies.

• Off

No back cover is attached.

Blank Cover

Blank sheets of paper are attached as back covers.

Print on Side 1

The first page of the document is copied on the front side of the back cover.

• Print on Side 2

The first page of the document is copied on the back side of the back cover.

• Print on Both

The first and second pages of the document are copied on the front and back sides of the back cover.

■Paper Supply

Displays the [Covers - Paper Supply] screen.

Select a tray to be used.

Front Cover Tray

Select the tray used for front covers.

· Back Cover Tray

Select the tray used for back covers.

Main Body Tray

Select the tray used for the body pages of the document.

When you use the bypass tray, select [Bypass] on the [Covers - Paper Supply] screen. When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Note • If [Covers] is set, [Auto Detect] cannot be selected for [Tray 5].

■Front Cover Quantity

This option is displayed when you select [Blank Cover] in [Front Cover]. Specify the number of blank sheets to be used as front covers.

■Back Cover Quantity


This option is displayed when you select [Blank Cover] in [Back Cover]. Specify the number of blank sheets to be used as back covers.

Pages per Side (Copying Multiple Pages onto One Sheet)

This feature allows you to copy two, four, or eight pages of a document together onto one side of a single sheet of paper.

When you set [Pages per Side], [Auto %] is automatically selected in [Reduce/Enlarge]. The machine automatically sets the copy ratio and makes copies of the images so that they fit on the selected paper.

- When you deselect [Auto %] in [Reduce/Enlarge] (when you select another copy ratio), image loss may occur depending on the image size of the document.
 - When [Image Shift] is set, the image shift amounts are applied to the whole document. For this reason, image loss may occur depending on the image size of the document.
 - When [Edge Erase] is set, the edge erase amounts are applied to each document page.
 - Select a tray other than [Auto Select] in [Paper Supply] on the [Copy] screen. If [Auto Select] is selected in [Paper Supply], a tray specified in [Auto Paper Off] is automatically selected. Change the setting as necessary. For information on [Auto Paper Off], refer to "5 Tools" > "Copy Service Settings" > "Copy Control" > "Auto Paper Off" in the Administrator Guide.
- **1** Select [Pages per Side].

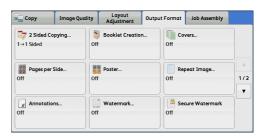

2 Select any option.

🔡 Pages per Side	B	💥 Cancel	🖉 🛷 Save
	Reading Order	Origi	nal Orientation
Off Off	12 1 Left->Right / 2 Top->Bottom		Upright Images
2 Pages	21 Right→Left	*	Sideways Images
🚹 4 Pages			
8 Pages			

■Off

Disables this feature.

■2 Pages

Copies two document pages onto one side of a single sheet of paper.

■4 Pages

Copies four document pages onto one side of a single sheet of paper.

■8 Pages

Copies eight document pages onto one side of a single sheet of paper.

Reading Order

Allows you to select how to lay out images on a page.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

• If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.

• Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Poster (Making Enlarged Copies Spread over Multiple Sheets)

An enlarged copy of a document can be made spread over multiple sheets.

This feature allows you to create a large poster by pasting together the copies spread over multiple sheets. Copied sheets are provided with a paste margin so that they can be pasted together. The paste margin is fixed to 10 mm.

- **Important** Ensure that the actual orientation of the original document matches the [Original Orientation] setting on the [Layout Adjustment] screen.
- Note You cannot use the document feeder with this feature.
- **1** Select [Poster].

🗧 Сору	Image Qualit	y Layout Adjustment	Output Format	Job Assembly	
⊒ 7 2 Sided 1→1 Sided	Copying	🔰 Booklet Creati Off	on Off	vers	
Pages po Off		Poster Off	Off	oeat Image	1/2
# Annotat		Watermark	Sec	cure Watermark	

2 Select any option.

Poster			💢 Cancel	🛷 Save
🧕 off	B0	B2	Tray	Paper Supply
🗄 Output Size	A0	A2	A4 Plai	2
🛃 Enlargement %	B1	B3		
	A1			

■Off

No enlarged copies are made.

■Output Size

Allows you to select the paper size.

■Enlargement %

Refer to "When [Enlargement %] is Selected" (P.118).

■Paper Supply

Displays the [Paper Supply] screen.

Select the paper tray to be used.


• When you use the bypass tray, select [Bypass] on the [Paper Supply] screen.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

When [Enlargement %] is Selected

This screen allows you to specify a different ratio for the width and length.

1 Use [+] and [-] to specify the copy ratios for the width and length.

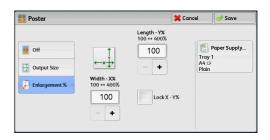

■Width - X% / Length - Y%

Allows you to specify the copy ratios for the width and length in the range from 100 to 400% in 1% increments.

■Lock X - Y%


Allows you to make the same ratio adjustment for the width and length at the same time.

Repeat Image (Making Multiple Copies on One Sheet)

This feature allows you to copy a document image on one side of a single sheet of paper repeatedly for a specified number of times.

When [Reduce/Enlarge] is set to [Auto %], the repeated copies of the image are reduced to fit on the selected paper. You can also specify how the repeated copies of the image are arranged.

- When making copies at the same size as the document image, the number of times the image is repeated is specified so that the copies fit on the paper.
 - If [Auto Select] is selected in [Paper Supply], the tray specified in [Auto Paper Off] is automatically selected. Change the setting if necessary. For information on [Auto Paper Off], refer to "5 Tools" > "Copy Service Settings" > "Copy Control" > "Auto Paper Off" in the Administrator Guide.
- **1** Select [Repeat Image].

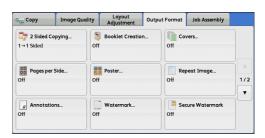

2 Select any option.

Repeat Image			💢 Cancel	🔗 Save
Off Auto Repeat Variable Repeat	Columns 1 ↔ 33	Rows 1 ↔ 23 1 - +		ge Layout Evenly Spaced Side by Side



Disables this feature.

■Auto Repeat

Automatically determines the number of the repeated copies according to the document size, paper size, and copy ratio, and then repeatedly copies the document image onto the paper.

• Copies cannot be made when the document image is larger than the specified paper size.

■Variable Repeat

Allows you to specify how many copies to place along each of the long and short edges of the paper. You can specify a value between 1 and 33 in the X direction, and a value between 1 and 23 in the Y direction.

■Image Layout

Evenly Spaced

The specified number of images are evenly arranged on the paper.

· Side by Side


The specified number of images are arranged on the paper with no space between the images.

Annotations (Adding a Comment/the Date/Page Numbers to Copies)

This feature allows you to add a comment, date, and page numbers onto copies.

You can select a comment, the date, and page numbers, and their print positions from preset formats.

- Important When you select this feature, if the number of pages scanned by the machine exceeds the maximum, the machine will not print the already-scanned data. In that case, follow the instructions of the message displayed on the screen to cancel the job. The maximum number of pages that the machine can scan is 999 pages per job.
- The setting in [Reduce/Enlarge] does not affect the annotation image and text sizes.
 - If you specify a comment, the date, and page numbers together, make sure that their print positions do not overlap before making copies.
 - When [Pages per Side] is set, an annotation is added to the combined image.
 - When [Repeat Image] or [Booklet Creation] is set, an annotation is added to each copy image.
 - If a layout template is specified in [Apply Layout Template to Copy/Print Jobs] under [Force Annotation] in System Administration mode, the comment, date, and page number specified here are overlapped with the text on the layout template when printed. For information on [Force Annotation], refer to "5 Tools" > "Common Service Settings" > "Force Annotation" in the Administrator Guide.
- **1** Select [Annotations].

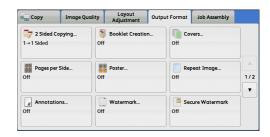

2 Select any option.



■Comment

Displays the [Comment] screen. Refer to "[Comment] Screen" (P.120).

■Date

Displays the [Date] screen. Refer to "[Date] Screen" (P.121).

■Page Numbers

Displays the [Page Numbers] screen. Refer to "[Page Numbers] Screen" (P.122).

Bates Stamp

Displays the [Bates Stamp] screen. Refer to "[Bates Stamp] Screen" (P.124).

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

· Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

[Comment] Screen

This screen allows you to select a comment style and its position.

1 Select any option.

🔓 Comment		💥 Can	cel	🛷 Save
	Stored Comments			
🕻 off	CONFIDENTIAL			Apply To
🤣 On	Copy Prohibited		All Po	iges
Selected Comment: CONFIDENTIAL	URGENT			Position
	IMPORTANT		Top I Same	Right e αs Side 1
	Circulate		X	Font Size
	Ignore Side 2	•	48 Pc	oints

∎Off

No comment is added.

∎On

A comment is added.

Stored Comments

Allows you to select comment text from eight preset options, or text set in System Administration mode.

For information on how to register text, refer to "5 Tools" > "Common Service Settings" > "Watermark" > "Custom Watermark 1 to 3" in the Administrator Guide.

■Apply To

Displays the [Apply Comment To] screen.

You can select whether to add a comment onto the first copy page only, or onto each copy page.

Position

Displays the [Comment - Position] screen.

You can select a comment position from nine options. For side 2 of copy sheets, you can select [Same as Side 1] or [Mirror Side 1].

■Font Size

Displays the [Comment - Font Size] screen.

You can select a comment size from three options, or can directly specify the size in the range from 6 to 64 points in 1 point increments.

[Date] Screen

This screen allows you to add the date onto copies. The date you started copying the document is printed.

You can change the date format. For more information, refer to "5 Tools" > "Common Service Settings" > "Watermark" > "Date Format" in the Administrator Guide.

1 Select any option.

- Date		💢 Cancel	Save
interest of the second	Format 20/01/2011 Date allows you to place today s date in margins of your copies.	the	Apply To NI Pages Position Sottom Right Mirror Side 1 Font Size 10 Points

■Off

No date is added.

∎On

The date is added.

Apply To

Displays the [Apply Date To] screen.

You can select whether to add a date onto the first copy page only, or onto each copy page.

Position

Displays the [Date - Position] screen.

You can select a date position from six options. For side 2 of copy sheets, you can select [Same as Side 1] or [Mirror Side 1].

■Font Size

Displays the [Date - Font Size] screen.

You can select a date size from three options, or can directly specify a size in the range from 6 to 24 points in 1 point increments.

[Page Numbers] Screen

This screen allows you to select a page-number style and its position.

1 Select any option.

123 Page Numb	ers	× c	ancel	🖉 🛷 Save
	Style			
💥 off	1, 2, 3	1/N, 2/N, 3/N		Apply To .ast Page
🎺 On	-1-, -2-, -3-	-1/N-, -2/N-, -3/N-	Start	
	Page 1, Page 2, Page 3	Page 1/N, Page 2/N,	Botto	Position m Center r Side 1
		Total Pages (N) 🔀	Font Size
		Auto	10 Pc	oints

■Off

No page numbers are added.

■On

Page numbers are add onto copies.

■Style

• 1, 2, 3

Adds page numbers only.

• -1-, -2-, -3-

Adds page numbers, and hyphens before and after each page number. (Example: -1-, -2-)

• Page 1, Page 2, Page 3

Adds page numbers, and the text "Page" before each page number. (Example: Page 1, Page 2)

• 1/N, 2/N, 3/N

Adds page numbers, and the total number of pages to the right of each page number. (Example: 1/50, 2/50)

When you select [1/N, 2/N, 3/N], the value specified in [Total Pages (N)] is used for the "N" value.

• -1/N-, -2/N-, -3/N-

Adds page numbers followed by the total number of pages, and hyphens before and after the numbers.

(Example: -1/50-, -2/50-)

When you select [-1/N-, -2/N-, -3/N-], the value specified in [Total Pages (N)] is used for the "N" value.

Page 1/N, Page 2/N

Adds page numbers followed by the total number of pages, and the text "Page" before each page number.

When you select [Page 1/N, Page 2/N], the value specified in [Total Pages (N)] is used for the "N" value.

Displays the [Total Pages (N)] screen.

- Auto

Automatically calculates the total number of pages.

- Enter Number

Allows you to specify the total number of pages in the range from 1 to 999.

■Apply To

Displays the [Apply Page Numbers To] screen. Refer to "[Apply Page Numbers To] Screen" (P.123).

Position

Displays the [Page Numbers - Position] screen. You can select a page-number position from six options.

For side 2 of copy sheets, you can select [Same as Side 1] or [Mirror Side 1].

■Font Size

Displays the [Page Numbers - Font Size] screen.

You can select a page-number size from three options, or can directly specify a size in the range from 6 to 24 points in 1 point increments.

[Apply Page Numbers To] Screen

This screen allows you to specify a page range to add page numbers.

1 Select any option.

Apply Page N	umbers To		💢 Cancel	I Save
	Starting Page	Ending Page	Star 1↔	ting Numbe 999
All Pages	1	Last		1
Starting Page Number			-	+
Ending Page Number				
Start & End Page Numbers	Include Covers / Separators			

■All Pages

Adds page numbers to all copy pages.

Starting Page Number

Allows you to specify the page on which to start adding page numbers, in the range from 1 to 999.

• Use [+] and [-], or the numeric keypad to enter the number of the first page.

■Ending Page Number

Allows you to specify the last page to add a page number, in the range from 1 to 999. The start page is fixed to "1".

Note • Use [+] and [-], or the numeric keypad to enter the number of the last page.

Start & End Page Numbers

Allows you to specify the first and last pages on which to add page numbers, in the range from 1 to 999.

• Use [+] and [-], or the numeric keypad to enter the numbers of the first and last pages.

■Include Covers/Separators

This option is available when you select [All Pages]. Select this check box to include covers and separators.

Starting Number

Allows you to specify a starting page number to add page numbers, in the range from 1 to 999.

• Use [+] and [-], or the numeric keypad to enter a starting page number.

[Bates Stamp] Screen

This screen allows you to add prefix text and page numbers onto copies.

1 Select any option.



∎Off

Does not add prefix text or page numbers onto copies.

∎On

Adds prefix text and page numbers onto copies.

Prefix

Allows you to enter prefix text with up to 16 characters, using the displayed keyboard.

Number of Digits

Displays the [Bates Stamp - Number of Digits] screen.

You can select [Auto Assign] or [Manual Assign]. When you select [Manual Assign], you can specify the number of digits to be used for page numbers in the range from 1 to 9 in 1 digit increments.

Apply To

Displays the [Apply Bates Stamp To] screen. Refer to "[Apply Bates Stamp To] Screen" (P.125).

Position

Displays the [Bates Stamp - Position] screen.

You can select a prefix and page-number position from six options. For side 2 of copy sheets, you can select [Same as Side 1] or [Mirror Side 1].

Font Size


Displays the [Bates Stamp - Font Size] screen.

You can select a prefix and page-number size from three options, or can directly specify a size in the range from 6 to 24 points in 1 point increments.

[Apply Bates Stamp To] Screen

This screen allows you to specify a page range to add prefix text and page numbers.

1 Select any option.

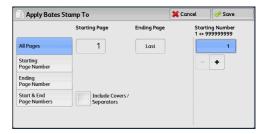

■All Pages

Adds prefix text and page numbers to all pages.

Starting Page Number

Allows you to specify the page on which to start adding prefix text and page numbers, in the range from 1 to 999.

• Use [+] and [-], or the numeric keypad to enter the number of the first page.

■Ending Page Number

Allows you to specify the last page to add prefix text and a page number, in the range from 1 to 999. The start page is fixed to "1".

• Use [+] and [-], or the numeric keypad to enter the number of the last page.

Start & End Page Numbers

Allows you to specify the first and last pages on which to add prefix text and page numbers, in the range from 1 to 999.

• Use [+] and [-], or the numeric keypad to enter the numbers of the first and last pages.

■Include Covers/Separators

This option is available when you select [All Pages]. Select this check box to include covers and separators.

Starting Number

You can specify a starting page number in the range from 1 to 999999999999999 when you do not set [Number of Digits], or can specify a starting page number of up to the allowable number of digits specified in [Number of Digits].

- Use [+] and [-], or the numeric keypad to enter a starting page number.
- Important If the page number exceeds the specified value (9999999999 when [Number of Digits] is not set) during copying, the copy job will be canceled.


Watermark (Printing Control Numbers on the Background of Copies)

This feature allows you to faintly print a sequential control number in the background of each copy page.

If you set "1" as the starting number, "1" is printed on each page of the first copy set and "2" is printed on each page of the second set.

To prevent, for instance, the duplication of confidential documents that are to be distributed at a conference, you can use this feature to add sequential numbers to the copies, and associate the numbers with the conference members.

- Important When you select this feature, if the number of pages scanned by the machine exceeds the maximum, the machine will not print the already-scanned data. In that case, follow the instructions of the message displayed on the screen to cancel the job. The maximum number of pages that the machine can scan is 999 pages per job.
- If a layout template is specified in [Apply Layout Template to Copy/Print Jobs] under [Force Annotation] in System Administration mode, the watermark specified here is overlapped with the text on the layout template when printed. For information on [Force Annotation], refer to "5 Tools" > "Common Service Settings" > "Force Annotation" in the Administrator Guide.
 - When [Force Watermark Copy] is set to [On], [Watermark] is fixed to [On] and cannot be changed. For more information on Watermark, refer to "5 Tools" > "Common Service Settings" > "Watermark" in the Administrator Guide.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Watermark].

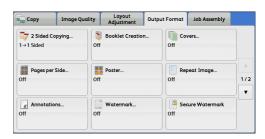

2 Select any option.

 Watermark
 Cancel
 Save

 Control
 User Account
 Original Orientation

 Image: Stored
 Watermarks...
 Images

 Image: Stored
 Images
 Images

 Image: Stored
 Images
 Images

 Images
 Images
 Images

 Images</td

Control Number

Do Not Add

No control number is printed.

• Add

A control number is printed. Enter the starting number of the control number. You can specify a value in the range from 1 to 9999, using [+] and [-] or the numeric keypad.

Stored Watermarks

Displays the [Stored Watermarks] screen. Refer to "[Stored Watermarks] Screen" (P.127).

■Date & Time

Allows you to select whether to print the date and time when the copy job started.

For information on the date format, refer to "5 Tools" > "Common Service Settings" > "Watermark" > "Date Format" in the Administrator Guide.

Serial Number

Allows you to select whether to print the serial number of the machine.

■User Account Number

Allows you to select whether to print a user account number when the Authentication or Accounting feature is enabled. However, if a user is not authenticated, the account number will not be printed.

- **Note** [User Account Number] is the No. (User Administration Number) registered by users with the Authentication and Accounting feature.
 - You can see if a user is authenticated by checking whether the <Log In/Out> button is lit.

■Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

· Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Watermark Effect

Displays the [Watermark Effect] screen.

Refer to "[Watermark Effect] Screen" (P.128).

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

[Stored Watermarks] Screen

This screen allows you to select text to print on copies.

1 Select [On].



2 Select any text.

■Off

No text is printed.

∎On

Text is printed. Select the text to be used as the watermark. You can specify text from three preset options, or text registered in System Administration mode.

For information on how to register text, refer to "5 Tools" > "Common Service Settings" > "Watermark" > "Custom Watermark 1 to 3" in the Administrator Guide.

[Watermark Effect] Screen

This screen allows you to set the Watermark Effect feature.

If you enable the Watermark Effect feature, the text strings specified in [Control Number], [Stored Watermarks], [Date & Time], [Serial Number], and [User Account Number] on the [Watermark] screen are embedded in the background of each copy. When you copy a document that has been copied with Watermark Effect, the text embedded in the background is printed as embossed or outline text depending on the option you select on the [Watermark Effect] screen.

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

1 Select any option.



∎Off

Prints the text specified on the [Watermark] screen as it is.

Embossed

When you copy a document that has been copied with the Watermark Effect, the text embedded in the background of the copy is printed as embossed text.

Outline

When you copy a document that has been copied with the Watermark Effect, the text embedded in the background of the copy is printed as outline text.

You can specify the size, density, and other settings for the text to be printed with Watermark in System Administration mode. For more information, refer to "5 Tools" > "Common Service Settings" > "Watermark" in the Administrator Guide.

Secure Watermark (Managing Document Security)

Secure Watermark is a security management feature to embed a copy protection digital code into a document, to restrict the document from being duplicated. The digital code enables you to analyze "when", "from which machine", and "by whom" the document was output.

Important • This feature is only supported on Fuji Xerox manufactured machines that are compatible to Secure Watermark.

- The copy protection of a document, the analysis function of digital codes, and the restrictive effect of hidden text using the Secure Watermark feature is not warranted to always function. The feature may not function depending on the document or settings. For more information, contact our Customer Support Center.
- We assume no responsibility for damages caused by using or not being able to use the Secure Watermark feature.
- Using the Secure Watermark feature may degrade print quality as follows:
 - · Colors may become darker.
 - Text in documents may become hard to read.
 - Dots such as decimal characters and periods may become hard to read.
- The Secure Watermark feature may not work properly for a document if its size is smaller than A5, if its background color is not white, or if the Watermark or Secure Watermark feature has already been used for the document.

- In some cases, a document may not be printed even if the Secure Watermark feature has not been used for the document. This happens because the machine incorrectly detects a copy protection code from the document. In such cases, ask the system administrator to temporarily disable [Secure Watermark Detection] for copy protection codes.
- If a layout template is specified in [Apply Layout Template to Copy/Print Jobs] under [Force Annotation] in System Administration mode, an embedded copy protection code is overlapped with the text on the layout template. For information on [Force Annotation], refer to "5 Tools" > "Common Service Settings" > "Force Annotation" in the Administrator Guide.
- Analyzing output paper allows the system administrator to check the identification information of the user who requested the job. Note that we assume no responsibility for any user privacy issues that may be caused by using the Secure Watermark feature.
- If you use the Secure Watermark feature on a document that a protection code of the Secure Watermark feature (including the Copy Management Expansion Kit (optional)) has already been embedded, the copy protection of the document, the analysis function of digital codes, and the restrictive effect of hidden text will be ineffective.
- When [Secure Watermark Detection] is set to [On], it takes longer for the first page of a document to be copied than usual as the machine detects a copy protection code.
- The following settings for the Secure Watermark Effect of the Secure Watermark Kit (optional) are fixed and cannot be changed: print density, embedded text display (outline), and the font size.
- The Watermark and Secure Watermark features cannot be used simultaneously.
- To analyze digital codes, an application, ApeosWare Secure Watermark Analyzer (sold separately), is required. For information on how to use ApeosWare Secure Watermark Analyzer, refer to the documentation provided with the application.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- Select [Secure Watermark].

Сору	Image Qu	ality	Layout Adjustment	Output Format	Job Assembly	
⊒ 7 2 Sided 0 1→1 Sided	Copying	Off	Booklet Creatio	n 0ff	overs	
Pages pe Off	er Side	off	Poster	Off	peat Image	1/2
# Annotat	ions	Off	Watermark	Gff Se	cure Watermark	

2 Select any option.

Secure Watermark Cancel Save

 Protection Code

 Image: Off

 Off

 Image: Off

 Image:

∎Off

Note

Does not manage document security.

∎On

Manages document security. Specify additional options if necessary.

■Protection Code

• Off

Does not prevent document duplication. Protection code is not embedded while digital code is embedded into copies.

· Prevent Duplication

Prevents document duplication. Protection code and digital code are embedded into copies.

Important • This setting also affects the fax and scan operation.

Stored Secure Watermarks

Displays the [Stored Secure Watermarks] screen. Refer to "[Stored Secure Watermarks] Screen" (P.130).

[Stored Secure Watermarks] Screen

This screen allows you to embed hidden text into documents. With this hidden text feature, the specified text is embedded in the entire sheet.

When you copy a document that has been copied with this hidden text feature, the embedded text on the output appears in white regardless of whether or not the Secure Watermark Kit (optional) is installed.

1 Select any option.



∎Off

Does not print hidden text.

∎On

Prints hidden text.

Allows you to specify text from three preset texts, or text registered in the System Settings.

For information on how to register text, refer to "5 Tools" > "Common Service Settings" > "Secure Watermark" > "Secure Watermark Effect" > "Custom Secure Watermark 1 to 3" in the Administrator Guide.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

· Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Folding (Outputting Bi-Folded)

This feature allows you to fold copies in half, or crease copies in half.

- Important When Finisher-B1 or Finisher-C1 is installed, do not remove output copies from the finisher tray until all of the output copies have been delivered.
- The supported paper orientation is only \square . Select the tray whose orientation is set to \square .
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Folding].

epeat Image Transparency Options Off
Сору

2 Select any option.

Folding	😫 Cancel 🧇 Save
Off	The arrow shows where the output will be delivered.
📝 Single Fold	

Copy က

∎Off

Does not fold copies.

■Single Fold

This option is displayed when the Booklet Maker Unit for Finisher-B1 (optional) or the Finisher-C1 with Booklet Maker (optional) is installed.

• When the Booklet Maker Unit for Finisher-B1 (optional) is installed:

Creases copies in half.


• When the Finisher-C1 with Booklet Maker (optional) is installed:

Folds copies in half.

Preset Repeat Image (Making Multiple Copies on a Single Sheet)

This feature allows you to repeatedly copy one original onto equally divided areas according to the specified number of copies.

You can select the number of times the original is copied onto one sheet from [2 Times], [4 Times], or [8 Times].

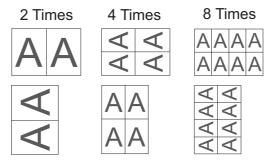

- When you select an option other than [Auto %] in [Reduce/Enlarge], image loss may occur depending on the image size of the document.
- **1** Select [Preset Repeat Image].

Сору	Image Quality	Layout Adjustment	Output	Format	Job Assembly	
J Folding Off	of		nage		insparency tions	
Copy Outpu Auto Center Tray	it	iD Card Copy f				▲ 2/2

2 Select any option.

🏴 Preset Repeat	Image	💥 Cancel	Save
off			
Times			
4 Times			
8 Times			

∎Off

Disables this feature.

2 Times

Makes two copies of the document image on one side of a single sheet of paper.

4 Times

Makes four copies of the document image on one side of a single sheet of paper.


8 Times

Makes eight copies of the document image on one side of a single sheet of paper.


Transparency Options (Inserting Blank Sheets between Transparencies)

This feature allows you to insert blank separators between output transparency sheets. At the same time, you can make copies for handouts.

- **Important** Using transparency sheets for color (with a white border) may cause a malfunction or paper jam.
- When loading A4 size transparencies on Tray 5 (Bypass), we recommend that you load them in portrait orientation.
 - Load transparency sheets in a tray in the same orientation as the paper to be used for handouts and separators.
- **1** Select [Transparency Options].

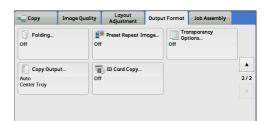

2 Select any option.

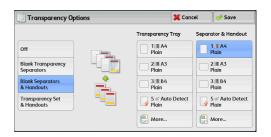

■Off

Does not insert separators.

■Blank Transparency Separators

Inserts a separator each time a transparency is copied. Only one set of copies can be made.

■Blank Separators & Handouts

Inserts a separator each time a transparency is copied. At the same time, the required number of copies is made for handouts.

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

■Transparency Set & Handouts

Makes copies on transparencies. At the same time, the required number of copies is made for handouts.

Note • This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

Transparency Tray

Allows you to select the paper tray to be used for the transparencies.

Select [More] to display the [Paper Supply - Transparency] screen on which you can select a tray.

Note

- When you use the bypass tray, select [Bypass] on the [Paper Supply Transparency] screen. Select other than [Auto Detect] for [Paper Size] on the [Tray 5] screen.
 - For [Transparency Tray], select one of the paper trays. Auto Paper Select feature is not available.
 - The paper tray that you selected for [Transparency Tray] cannot be selected for [Separator Tray], [Separator & Handout], or [Handout Tray] at the same time.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Separator Tray

Note

Allows you to select the paper tray to be used for the separators.

Select [More] to display the [Paper Supply - Separator] screen on which you can select a tray.

- When you use the bypass tray, select [Bypass] on the [Paper Supply Separator] screen. Select other than [Auto Detect] for [Paper Size] on the [Tray 5] screen.
 - For [Separator Tray], select one of the paper trays. Auto Paper Select feature is not available.
 - The paper tray that you selected for [Transparency Tray] cannot be selected for [Separator Tray] at the same time.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Separator & Handout

Allows you to select the paper tray to be used for the separators and handouts. Select [More] to display the [Paper Supply - Separator & Handout] screen on which you can select a tray.

- Note
- When you use the bypass tray, select [Bypass] on the [Paper Supply Separator & Handout] screen. Select other than [Auto Detect] for [Paper Size] on the [Tray 5] screen.
 - For [Separator & Handout], select one of the paper trays. Auto Paper Select feature is not available.
 - The paper tray that you selected for [Transparency Tray] cannot be selected for [Separator & Handout] at the same time.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Handout Tray

Allows you to select the paper tray to be used for the handouts.

Select [More] to display the [Paper Supply - Handout] screen on which you can select a tray.

- Note When you use the bypass tray, select [Bypass] on the [Paper Supply Handout] screen. Select other than [Auto Detect] for [Paper Size] on the [Tray 5] screen.
 - For [Handout Tray], select one of the paper trays. Auto Paper Select feature is not available.
 - The paper tray that you selected for [Transparency Tray] cannot be selected for [Handout Tray] at the same time.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Copy Output (Specifying Finishing Options)

This feature allows you to select finishing options.

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

- Waste staples may come out with output paper. Be careful not to get injured by the staples.
- Do not staple punched holes of paper. Sharp points of a staple may cause injuries.

If the finisher is installed, each set of copies can be stapled, and then output. When the Hole Punch Kit for Finisher-B1, the Finisher-C1, or the Finisher-C1 with Booklet Maker is installed, holes can be punched in the copies.

1 Select [Copy Output].

🖬 Сору	Image Quality	Layout Adjustment	Output	t Format	Job Assembly	
D Folding Off	ot	Preset Repeat Ir f	nage		insparency tions	
Copy Outp	ut	🚺 ID Card Copy f				2/2
Center Tray						

2 Select any option.

Copy Output			💢 Cancel	🔗 Save
	Staple	Hole Punch	Orig	inal Orientation
G Auto	Off 📃 🔺	Off		Upright Images
Collated	1 Staple	2 Holes		Sideways Images
Uncollated	2 Staples 📃	2 Holes		5 inages
Uncollated with	2 Staples 📑 🔻	2 Holes		
Separators			Cer	Output / Offset

■Auto

Copies are collated when the originals are loaded in the document feeder.

Copies are collated when originals are loaded on the document glass and any of the following features is used: 2 Sided Book Copying, Covers, [Blank Separators & Handouts] or [Transparency Set & Handouts] of Transparency Options, Booklet Creation, Stapling, Build Job, Sample Set, and Combine Original Sets.

■Collated

The machine outputs sheets sorted into sets that are arranged in page order.

Uncollated

The machine outputs the specified number of copies and sorts sheets by page.

■Uncollated with Separators

The machine outputs copies with blank sheets inserted as a separator and sorts sheets by page.

When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

■Separator Tray

When you select [Uncollated with Separators], select the paper tray to be used for the separators.

• When you use the bypass tray, select [Bypass] on the [Paper Supply - Separator] screen.

■Staple

Specify the position for stapling. The number of sheets that can be stapled is 2 - 50 (when 80 gsm paper is used). Available paper types are: Plain (60 - 105 gsm), Reload (60 - 105 gsm), Recycled (60 - 105 gsm), Punched (60 - 105 gsm), Letterhead (60 - 105 gsm), Pre-printed (60 - 105 gsm), Lightweight (56 - 59 gsm)*, Heavyweight (106 - 169 gsm), Extra Heavyweight (170 - 216 gsm), Bond (170 - 216 gsm), and Custom Paper 1 to 5.

*: Only when the HCF Kit is installed

- **Important** In the following cases, the actual stapling position differs from the stapling position displayed on the screen:
 - When [Original Orientation] is set to [Upright Images], and [Staple] is set to one position at the right side.
 - When [Original Orientation] is set to [Sideways Images], and [Staple] is set to one position at the left side.

■Hole Punch

Note

Sets the position for punching holes.

The positions for punching vary depending on a finisher installed.

- When the hole-punching feature of a finisher is defective, the output is delivered to the center tray instead of the finisher tray. Remove the output delivered to the center tray every now and then.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

· Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Output/Offset

Allows you to select the output destination tray and offset operation.

Offset Stacking

This option is displayed when you select [Center Tray - Upper] or [Center Tray - Lower] for the output destination. When an optional finisher is installed, this option is displayed when you select [Center Tray] or [Right Middle Tray].

The offset function is for slightly offsetting and outputting each paper stack to allow you to distinguish the separations. You can select from [No Offset], [Offset per Set], [Offset per Job], [Offset Every N Pages], [Offset Every N Sets], and [System Default].

- Note
- This feature does not appear for some models. An optional component is required. For more
 information, contact our Customer Support Center.
 - If you select [System Default], the setting in System Administration mode will be effective. For information on how to change the setting, refer to "5 Tools" > "Copy Service Settings" > "Copy Defaults" > "Output Destination" in the Administrator Guide.
 - When the finisher is installed, [Right Top Tray] indicates the upper tray of the finisher.
 - When the exit 2 tray is installed, [Center Tray Upper] and [Center Tray Lower] appear on the screen.

Paper Size and Stapling Position

• Finisher-A1

	1 Staple	1 Top Right
A4립, B5립, 7.25 x 10.5"립, 8.5 x 11"립, 16K립	Report	Report
A4, A3, B4, 8.5 x 11", 8.5 x 13", 8.5 x 14", 11 x 17", 8K	Report	Report

• Finisher-B1

	1 Staple	1 Top Right	2 Staples	2 Тор	2 Right
A4엽, B5엽, 7.25 x 10.5"엽, 8 x 10"엽, 8.5 x 11"입, 16K엽	Report	Report * Luca	IReport I	Report	
A4, A3, B4, 8.5 x 11", 8.5 x 13", 8.5 x 14", 11 x 15", 11 x 17", 8K	*	Report *	I Report	Report	Report I

* : The staple orientation displayed on the touch screen differs from the actual staple orientation. Outputs are stapled in the orientation shown in the above table.

• Finisher-C1/Finisher-C1 with Booklet Maker

	1 Staple	1 Top Right	2 Staples	2 Тор	2 Right
A4입, B5입, 8 x 10"입, 8.5 x 11"입, 16K입	Report	Report	IReport	Report	Reporti
A4, 8 x 10", 8.5 x 11", 8.5 x 13", 8.5 x 14"	Report	Report *	I Report	Report	Report
A4, B4, 11 x 17", 8K	Report	Report			

* : The staple orientation displayed on the touch screen differs from the actual staple orientation. Outputs are stapled in the orientation shown in the above table.

Paper Size and Hole-Punching Position (Finisher-B1, Finisher-C1, Finisher-C1 with Booklet Maker)

2 holes^{*1}

	2 Holes	2 Holes Top	2 Holes Right
A4엽, B5엽, 7.25 x 10.5"엽, 8 x 10"곕, 8.5 x 11"엽, 16K엽,	oReport o	o o Report	
A4, A3, B4, 215 x 315 mm, 8 x 10" ^{*2} , 8.5 x 11", 8.5 x 13", 8.5 x 14", 11 x 15", 11 x 17", 8K	Report o	o o Report	Report o

*1 : The distance between the two holes is 70 mm with the US 2/3 Hole Punch Kit, and is 80 mm with the 2/4 Hole Punch Kit, which is ordinary used.

*2 : Only available for Finisher-C1 and Finisher-C1 with Booklet Maker.

3 holes


	3 Holes	3 Holes Top	3 Holes Right
A4립, B5립, 7.25 x 10.5"입, 8 x 10"입, 8.5 x 11"입, 16K입	°Report °	o o o Report	Report ^o o
A3, B4, 11 x 15", 11 x 17", 8K	o Report o	e e e Report	Report o

• 4 holes

	4 Holes	4 Holes Top	4 Holes Right
A4입, 7.25 x 10.5입, 8.5 x 11"입, 16K입	o Report o o	o o o o Report	Reporto o
A3, 11 x 15", 11 x 17", 8K	o Report	o o o o Report	Report o

ID Card Copy (Copying Both Sides of an ID Card)

This feature allows you to copy both sides of a small undetectable original, such as an ID card, onto one side of a sheet of paper.

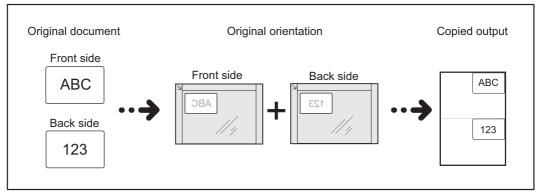

1 Specify the orientation of the document in [Original Orientation] on the [Layout Adjustment] screen.

🖕 Copy 🔰 Image C	Layout Outp	ut Format Job Assembly	
☐7 2 Sided Copying 1→1 Sided	AB Book Copying Off	2 Sided Book Copying Off	
🕂 Original Size	Mixed Size Originals	Edge Erase	
Auto Detect	Off	Top / Bottom: 2mm / 2mm Left / Right: 2mm / 2mm Center: 0mm	1/
🛃 Image Shift	Invert Image	i Original Orientation	
Side 1: Off Side 2: Off	Normal Image Positive Image	Upright Images	

2 Place the document slightly away from the top left corner of the document glass, and close the document glass.

Important • Always use the document glass when copying. You cannot use the document feeder with this feature.

- Specify the orientation of the original document correctly.
- If the edges of the image are missing, slightly move the card inward on the document glass so that the whole image can be scanned.
- When a reduced size is specified to copy an ID card, the machine may copy the ID card in a different orientation from the original orientation depending on the magnification ratio specified. For information on the copy magnification ratio for ID Card Copy, refer to "5 Tools" > "Copy Service Settings" > "Copy Control" > "ID Card Copy Reduce/Enlarge" in the Administrator Guide.

For information on how to specify the orientation of a document, refer to "Original Orientation (Specifying the Orientation of Loaded Documents)" (P.108).

3 Select [ID Card Copy] on the [Output Format] screen.

🖕 Сору	Image Quality	Layout Adjustment	Output For	mat	Job Assembly	
Folding Off	of		nage ([Of	🕘 Optie	sparency ons	
Copy Output Auto Center Tray	ut] ID Card Copy f				2/2
						V

1	Select [On].
---	--------------

💼 ID Card Copying		🗱 Cancel	🔗 Save
<pre>◇ Off</pre>	1. Copy the front of the card as: 1. Copy the front of the card over without ch to copy the back of the card. Note Place the card slightly owe corner of the Document Glass to image of the card.	anging its position ay from the top left	

∎Off

4

Disables ID card copying.

∎On

Enables ID card copying.

Job Assembly

This section describes the features you can select on the [Job Assembly] screen. The following shows the reference section for each feature.

Build Job (Processing Documents Scanned with Different Settings as One Job)	141
Sample Job (Checking the Finished Output of the Copy)	145
Combine Original Sets (Adding Originals)	147
Form Overlay (Making Copies to Overlay Documents)	148
Delete Outside/Delete Inside (Deleting Outside or Inside of the Selected Area)	149
Stored Programming (Calling a Stored Program for Build Job)	151

- **1** Select [Copy] on the [Services Home] screen.
- Langua 0 Ø Screen Brightness Сору Fax / Internet Fax E-mai Setup 0 Simple Copy Simple Fax Scan to PC Activity Report 2 R Fax Receiving Mode Store to Folde Send from Fold Print Mode
- **2** Select a feature on the [Job Assembly] screen.

뤸 Build Job ਗ਼		Sample Job Off	off	Combine Original Sets
P. Form Over	lay	Delete Outside / Delete Inside Off		Stored Programming

Build Job (Processing Documents Scanned with Different Settings as One Job)

This feature allows you to apply different copy settings to each document page or each document stack, and then output the copies as one job.

- This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Build Job].

👝 Сору	Image Quality	Layout Adjustment	Output Form	at Job Ass	embly	
I Build Job Off		Q Sample Job Off		Combine Off	Original Set	s
Porm Over		Delete Outsid Delete Inside. Off		Stored Pr	rogramming.	
					(
💁 Build Job					🛷 Save	
ী Build Job		Copy Output ollated ght Top Tray	off	Booklet Crea	<u> </u>	
	Ci Ci	ollated ght Top Tray Covers	off	Booklet Crea	ition	1/

2 Select [On].

3 Select any option.

Note • Select [▲] to return to the previous screen or [▼] to move to the next screen.

■Off

Build Job is not applied.

∎On

Build Job is applied. The feature buttons appear. Specify options as necessary.

Important • The features selected here cannot be canceled or changed while the machine executes a copy job.

For information on features available in Build Job, refer to "Features that can be set in Build Job" (P.142).

Features that can be set in Build Job

■Copy Output

For more information, refer to "Copy Output (Specifying Finishing Options)" (P.135).

Booklet Creation

For more information, refer to "Booklet Creation (Creating a Booklet)" (P.111).

■Covers

Important • The machine does not copy on covers when using the Build Job feature. For more information, refer to "Covers (Attaching Covers to Copies)" (P.114).

Annotations

For more information, refer to "Annotations (Adding a Comment/the Date/Page Numbers to Copies)" (P.119).

Segment Separators

For more information, refer to "[Segment Separators] Screen" (P.144).

Watermark

For more information, refer to "Watermark (Printing Control Numbers on the Background of Copies)" (P.126).

Secure Watermark

For more information, refer to "Secure Watermark (Managing Document Security)" (P.128).

[Copy] Screen When Build Job is in Progress

The following describes the screen that appears while the Build Job is being executed.



Chapter Start

Displays the [Build Job - Chapter Start] screen. Refer to "[Build Job - Chapter Start] Screen" (P.144).

■Insert Separators

Displays the [Segment Separators] screen. Refer to "[Segment Separators] Screen" (P.144).

■Change Quantity

Displays the [Change Quantity] screen on which you can change the number of copy sets using the numeric keypad.

■Change Settings

Displays the [Copy] screen on which you can change the settings for the next document. After changing the settings, press the <Start> button on the control panel to start scanning of the document. To return to the previous screen, press the < # > button.

When using a stored program for Build Job

While the machine makes copies using the Build Job feature, you can use a stored program.

1) Select [Change Settings].

2) Select the [Job Assembly] tab.

3) Select [Stored Programming].

4) Select the number of the stored program that contains the features you want to use.

For information on how to register a stored program, refer to "Registering Stored Programs for Build Job" (P.348).

■Delete

Note

Clears the document data stored by the Build Job feature, and cancels the job.

- You can also press the <C (Clear)> or <Clear All> button on the control panel to perform the same operation.
 - While the machine is scanning the loaded document, [Delete] is displayed. Select [Delete] to pause scanning. Select [Start] on the touch screen, or press the <Start> button on the control panel to resume scanning.

■Last Original

Select this button to end scanning of documents. The build job starts.

Next Original

Select this button when you have another document. This button is always selected when you use the Build Job feature.

■Start

After loading the next document, select this button to scan the next document.

• You can also press the <Start> button on the control panel to perform the same operation.

■Sample Job

When making multiple sets of copies, you can print a sample set to check the finished output and then print the remaining copy sets. You can select to continue or cancel the job after the confirmation.

[Build Job - Chapter Start] Screen

This screen allows you to set the chapter start.

1 Select any option.

off	This feature determines wheth is to be copied onto a new she It works when 2 Sided Copying	et of paper.	dded originals
On	Select Off to copy onto the co originals.	ntinuing page of the prev	rious set of
Pages per Side - New Page	Or, select On to copy onto Side Or, select "Pages per Side - Ne paper.		

■Off

The next stack of documents is copied after the previous stack.

∎On

The next stack of documents is copied from Side 1 of a new sheet of paper.

■Pages per side - New Page

When [Pages per Side] is set, even if all documents are divided for every chapter before all of them are assembled in the Page Per Side feature, the next stack of documents is copied from Side 2 of the paper.

[Segment Separators] Screen

This screen allows you to insert a sheet of paper as a separator in between each stack of documents. You can specify the number of separators to insert in the range from 1 to 99 as necessary.

- Note You can specify different settings for each stack of documents. If you do not specify particular settings for each stack of documents, the previously specified settings are applied.
- **1** Select any option.

Segment Separ	ators	•	🕻 Cancel	🕜 Sαve	
Segment Separator Tray				Separator Quantity 1 ↔ 99 Sheets	
No Separators	1 14 Plain	5 ≓ Auto Det ∳ Plain	lect	1	
Blank Separators	□ 2 III A3 Plain	6 A4 Plain	-	+	
7 1 Sided Side 1 Only	□ 3 = 8K Plain	🔡 More			
📝 1 Sided Side 2 Only	U 4≣ B5 Plain				
2 Sided Separators					

■No Separators

Does not insert any separators.

Blank Separators

Inserts blank separators.

If you select this option, load documents, and press the <Start> button, the blank separators are inserted before the copies of the documents.

■1 Sided Side 1 Only

The first page of the loaded documents is copied on the front side of a separator, and the rest of the pages are copied on the paper other than the separator.

When [Pages per Side] is set, the number of pages (2 pages, 4 pages, or 8 pages) that you selected to copy onto one side of a single sheet, starting from the first page of the loaded documents, are copied onto the front page of a separator.

When you load a single sheet document, the document is copied onto a separator.

■1 Sided Side 2 Only

The first page of the loaded documents is copied on the back side of a separator, and the rest of the pages are copied on the paper other than the separator.

When [Pages per Side] is set, the number of pages (2 pages, 4 pages, 8 pages) that you selected to copy onto one side of a single sheet, starting from the first page of the loaded documents, are copied onto the back side of a separator.

When you load a single sheet document, the document is copied onto a separator.

■2 Sided Separators

The first two pages of the loaded documents are copied onto each side of a separator, and the rest of the pages starting from the third page are copied onto the paper other than the separator.

When [Pages per Side] is set, the number of pages (2 pages, 4 pages, 8 pages) that you selected to copy onto one side of a single sheet, starting from the first page of the loaded documents, are copied onto each side of a separator.

When you load two-sheet documents, both sheets are copied onto each side of a separator.

When you have two separate documents, a single sheet document and multiple sheet documents, if you want to copy this single sheet document and the first page of the multiple sheet documents onto each side of a separator, when loading the multiple sheet documents, select [No Separator] in [Build Job - Separators]. If you do not select [No Separator], the machine processes these two documents separately under different separator settings, the single-sheet document is copied onto a separator, and the first page (or first two pages) of the multiple sheet documents is copied onto another separator.

Segment Separator Tray

Allows you to select the tray, which is loaded with paper to be used as a separator. When [Bypass] is selected, the [Tray 5] screen is displayed. For more information, refer to "[Tray 5] Screen" (P.90).

Separator Quantity

This option is available when you select [Blank Separators]. You can specify the number of separators in the range from 1 to 99.

Sample Job (Checking the Finished Output of the Copy)

When making multiple sets of copies, you can print a sample set to check the finished output and then print the remaining copy sets. You can select whether to continue or cancel the job after the confirmation. This feature also allows you to change the number of copy sets. The sample copy is included in the total number of copy sets.

- After a sample set is output, the machine automatically outputs the remaining data if the machine is left uninstructed for the period specified in [Auto Job Release]. For more information on [Auto Job Release], refer to "5 Tools" > "Common Service Settings" > "Machine Clock/Timers" > "Auto Job Release" in the Administrator Guide.
- **1** Select [Sample Job].

🖕 Сору	Image Quality	Layout Adjustment	Output Format	Job Assembly	
Build Job Off		🔍 Sample Job Off	off	Combine Origina	l Sets
Form Over Off	-	Delete Outside Delete Inside Off		Stored Programm	ning

2 Select [On].



■Off

No sample set is made.

∎On

A sample set is made.

[Copy] Screen When Sample Job is in Progress

After the sample set is copied, the machine pauses the job and displays the [Copy] screen.

i Copy		File 12345	X Close
Quantity: Pages:	20/300 40/50		Delete
Originals:	10		
w1 A4 🕫	(A4 🛛)		Last Original
100% Collated		, The second sec	Start
		Change Quantity	

■Change Quantity

Displays the [Change Quantity] screen on which you can change the number of copies entered before. Enter a new quantity using the numeric keypad. The new value must include the number of the sample set that has already been printed. When reducing the quantity, specify a value between 1 (sample set) and the number of copies entered before.

• If you specify "1" as a new quantity and then press the <Start> button, the machine will not process the job.

■Change Settings

Displays the [Change Settings] screen. To cancel the settings you have made, deselect the check box for the feature you want to cancel.

■Delete

The remaining copies are canceled.

■Start

The remaining copies are made.

• You can also press the <Start> button on the control panel to perform the same operation.

Combine Original Sets (Adding Originals)

Use this feature when copying a document that has too many pages to be loaded in the document feeder at one time, or when scanning each document page using the document glass and having the machine process the pages as one job.

When this feature is used, [Next Original] is always selected on the screen during scanning documents with the document feeder or the document glass.

If [Copy Output] is set to [Auto], the output is automatically sorted.

When all documents have been scanned, select [Last Original].

- After the first original set is copied, the machine automatically outputs the remaining data if the machine is left unused for the period specified in [Auto Clear]. For more information on [Auto Clear], refer to "5 Tools" > "Common Service Settings" > "Machine Clock/Timers" > "Auto Clear" in the Administrator Guide.
- **1** Select [Combine Original Sets].

🖕 Сору	Image Quality	Layout Adjustment Output	t Format Job Assembly
iggi Build Job Off		🔍 Sample Job Off	Combine Original Sets Off
Form Overl	-	Delete Outside / Delete Inside Off	Stored Programming

2 Select [On].

Combine Or	iginal Sets	💢 Cancel	Save 🔗
🕻 Off	Use this feature if the number of your or exceeds the capacity of the Document F The sets will be combined into one job. Note: if you want to select different feat for each group, use Build Job.	eeder.	ginal Orientation Upright Image Sideways Images

∎Off

Disables this feature.

∎On

Enables this feature.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

[Copy] Screen When Combine Original Sets is in Progress

The [Copy] screen is displayed when copying starts.



■Delete

Clears the document data stored with the Combine Original Sets feature, and cancels copying.

• You can also press the <C (Clear)> or <Clear All> button on the control panel to perform the same operation.

■Last Original

Select this button to end scanning documents.

■Next Original

Select this button when you have more documents to copy. This button is always selected when the Combine Original Sets feature is used.

■Start

After loading the next document, select this button to scan the next document.

• You can also press the <Start> button on the control panel to perform the same operation.


Form Overlay (Making Copies to Overlay Documents)

This feature scans the first page of a document as a form image, and overprints it on the copies of the subsequent pages.

- Important If the machine is set to detect Secure Watermark, this feature may not be used depending on the type of the form image. For more information, contact our Customer Support Center. For more information on the setting of Secure Watermark Detection, refer to "5 Tools" > "Common Service Settings" > "Secure Watermark" > "Secure Watermark Control" in the Administrator Guide.
- This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Form Overlay].

Copy Image Quality	y Layout Output Adjustment	Format Job Assembly
Build Job Off	Sample Job Off	Combine Original Sets Off
Form Overlay Off	Delete Outside / Delete Inside Off	Stored Programming

2 Select [On].

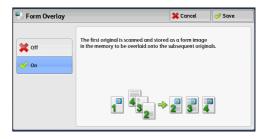

■Off

Does not overprint a form image.

∎On

Overprints a form image.

Delete Outside/Delete Inside (Deleting Outside or Inside of the Selected Area)

This feature allows you specify the areas to be deleted from a document image. Up to three areas can be specified.

1 Select [Delete Outside/Delete Inside].

👝 Сору	Image Quality	Layout Outp Adjustment	put Format Job Assembly
Build Job Off		🔍 Sample Job Off	Combine Original Set
🖳 Form Overla Off		Delete Outside / Delete Inside	Stored Programming

🏲 Delete Outsic	le / Delete Inside	X Co	incel	🛷 Save
	Area Settings	Originals	Origi	nal Orientation
off	Area 1 Not Defined	\overline Both Sides		Upright Image
Delete Outside		🗾 📝 Side 1 Only	1	Sideways Images
Delete Inside	Not Defined	Side 2 Only		
	Area 3 Not Defined	The above setting is only applicable to 2-sided originals.		

■Off

No area is deleted.

■Delete Outside

2 Select any option.

Deletes the outside of the selected area.

■Delete Inside

Deletes the inside of the selected area.

■Area Settings

Displays the [Delete Outside/Delete Inside - Area 1 (Area 2 or Area 3)] screen. You can specify up to three areas.

Refer to "[Delete Outside/Delete Inside - Area 1 (Area 2 or Area 3)] Screen" (P.150).

■Originals

When the original document is a 2-sided document, specify from which side the specified area is to be deleted.

Both Sides

Applies the settings to both sides of the document.

• Side 1 Only

Applies the settings to Side 1 of the document.

· Side 2 Only

Applies the settings to Side 2 of the document.

Original Orientation

Allows you to specify the orientation of the document so that the machine can identify the top of the document.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

· Sideways Images


Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

[Delete Outside/Delete Inside - Area 1 (Area 2 or Area 3)] Screen

This screen allows you to specify the area to be deleted. The area is defined by the rectangle formed between the points X1,Y1 and X2,Y2. The origin point is the top right corner of a document.

You can specify a value in the range from 0 to 432 mm for the width (X) and the length (Y) in 1 mm increments.

- Note Specify the 2 coordinates from the top right corner of the document.
 - When specifying multiple areas, the specified areas can overlap each other.
 - When [Reduce/Enlarge] is set, the specified area will be reduced or enlarged accordingly.
- **1** Select [Area 1], [Area 2], or [Area 3].

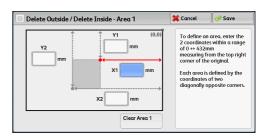

- **2** Enter the value for X1 using the numeric keypad.
- **3** Select the text box for [Y1], and enter the value for Y1 using the numeric keypad.
- **4** Select the text box for [X2], and enter the value for X2 using the numeric keypad
- **5** Select the text box for [Y2], and enter the value for Y2 using the numeric keypad.
 - Note If all of [X1], [Y1], [X2], and [Y2] are set to [0], the area will be invalid. If no other area is specified, the Delete Outside/Delete Inside feature cannot be used.
 - Pressing the <C (Clear)> button clears the value you have entered.

■Clear Area 1 (Area 2 or Area 3)

Clears all the values set for Area 1 (Area 2 or Area 3).

Stored Programming (Calling a Stored Program for Build Job)

This feature allows you to call a stored program for Build Job.

This feature is the same as "8 Stored Programming" > "Calling a Stored Program" > "Calling a Stored Program for Build Job". For more information, refer to "Calling a Stored Program for Build Job" (P.352).

4 Fax

This chapter describes the basic operations and features for the Fax services.

N	• The line 2, line 3, and SIP are optional.
	 The Fax services are not available for some models. An optional component is required. For more information, contact our Customer Support Center.
٠	Fax Procedure
•	Operations during Faxing162
•	About Internet Fax
•	About IP Fax (SIP)173
•	About Server Fax178
•	Simple Fax
•	Fax/Internet Fax186
•	Layout Adjustment
•	Fax/Internet Fax Options
•	More Options
•	Broadcast
•	Receiving Faxes
•	Facsimile Information Services

Fax Procedure

This section describes the basic fax procedures. The following shows the reference section for each procedure.

Step 1 Loading Documents	154
Step 2 Selecting Features	156
Step 3 Specifying Destinations	158
Step 4 Starting the Fax Job	159
Step 5 Confirming the Fax Job in Job Status	160

Step 1 Loading Documents

The following two methods are available to load documents:

Document Feeder

- · Single sheet
- Multiple sheets

Document Glass

- · Single sheet
- · Bound documents, such as books

Document Feeder

The document feeder supports single and multiple sheet documents with sizes from 125 x 110 mm (Standard size: A5, A5^{\square}) to 297 x 600 mm (long) (Standard size: A3, 11 x 17").

The document feeder automatically detects documents of standard-size widths.

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on [Paper Size Settings], refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

The sizes on the left are detected as the sizes shown on the right as follows.

Original Document Size	Document Size Detected by the Document Feeder
8-inch width document	B5 width document
10-inch width document	B4 width document

The document feeder accepts the following number of sheets.


Document Type (Weight)	Number of Sheets
Lightweight paper (38 - 49 gsm)	110 sheets
Plain paper (50 - 80 gsm)	110 sheets
Heavyweight paper (81 - 128 gsm)	75 sheets


Important • To avoid paper jams, use the document glass for folded or wrinkled documents, cut-and-pasted documents, curled paper, or back carbon paper.

• 2-sided scanning of lightweight paper (38 - 49 gsm) is not supported.

For information on how to fax mixed sized documents, refer to "Mixed Size Originals (Scanning Different Size Documents Simultaneously)" (P.200).


- **1** Remove any paper clips and staples before loading a document.
- **2** Load the document face up (when the document is 2-sided, place the front side up) in the center of the document feeder.
 - Note The confirmation indicator lights up when the document is loaded correctly. If the indicator does not light, the machine may be detecting the document on the document glass. Load the document again.
- **3** Adjust the document guides to match the size of the document loaded.





Fax 4

4 Raise the document stopper.



Document Glass

The document glass supports a single sheet, a book, or other similar documents with sizes from $15 \times 15 \text{ mm}$ to $297 \times 432 \text{ mm}$ (Standard size: A3, 11×17 ").

Important • Always close the document cover after using the document glass.


The document glass automatically detects standard size documents.

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on [Paper Size Settings], refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

∧ CAUTION

Do not apply excessive force to hold thick document on the document glass. It may break the glass and cause injuries.

- **1** Open the document cover.
 - Important Ensure that the touch screen is active, and then load a document. Otherwise, the machine may not properly detect the document size.
- **2** Load the document face down, and align it against the top left corner of the document glass.
 - When you load a A5, B5 or A4 document on the document glass in portrait orientation, the scanned image is rotated 180 degrees when transmitted.





- **3** Close the document cover.
 - When a standard size document is loaded on the document glass, the size of the document is displayed in the message field.

Step 2 Selecting Features

The following two services are available to send faxes.

■Simple Fax

Allows you to only select basic features to send faxes.

Fax/Internet Fax

Allows you to make detailed settings to send faxes.


The following procedure uses [Fax/Internet Fax] to describe how to select features.

You can select the Fax or Internet Fax service, or the Server Fax service on the [Services Home] screen.

For information on the Simple Fax feature, refer to "Simple Fax" (P.180).

Important • The Fax and Internet Fax services are not available while the Server Fax service is enabled.

- Note The features displayed on the screen depend on your machine configuration.
 - When the Authentication or Accounting feature is enabled, a user ID and passcode may be required. Ask your system administrator for the user ID and passcode.
- **1** Press the <Services Home> button.




<Services Home> button

2 Select [Fax/Internet Fax].




3 If the previous settings still remain, press the <Clear All> button.



<Clear All> button

4 Select each tab, and select a feature as necessary.

When you press the <Energy Saver> button while configuring the features, you can select whether to enable the 2 Sided (Skip Blank Pages) feature. For more information on [2 Sided (Skip Blank Pages)], refer to "2 Sided (Skip Blank Pages)" (P.196).

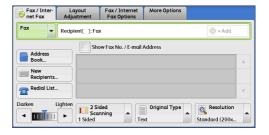

Fax 4

The following shows the reference section for each tab.

"Fax/Internet Fax" (P.186) "Layout Adjustment" (P.199) "Fax/Internet Fax Options" (P.205) "More Options" (P.225) 4 Fax

Step 3 Specifying Destinations

Three methods are available to specify recipients: by phone number, by address number, and by group dial number. The following shows the input methods supported by each method.

	Numeric Keypad	One Touch buttons	Address Book
Phone Number	0	Х	х
	4 digits (0001 to 2000)		
Address Number (Speed Dialing)	3 digits + * (nnn0 to nnn9) 2 digits + * (nn00 to nn99)	2 digits (1 to 70) or (1 to 60)*	From the list tab and index
Group Dial Number	# + 2 digits	х	0

O Available

X Not available

*: There two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following:

[Type 1] Buttons 1 to 70 are used for address numbers and they correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and correspond to the registered stored programs 1 and 2.

[Type 2] Buttons 1 to 60 are used for address numbers and they correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and correspond to the registered stored programs 1 to 12.

By default, [Type 1] is selected. For information on how to change the settings registered to the one touch buttons, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" in the Administrator Guide.

Important • When using the Server Fax service, you cannot specify address numbers using the numeric keypad or use the one touch buttons.

You can specify multiple recipients (Broadcast Send) using the above methods. You can also use a combination of the methods.

If the same recipient was specified for several pending documents, you can send the documents with a single phone call. This feature is called Batch Send. Note that you cannot use Batch Send with Broadcast Send, Relay Broadcast, Remote Folder, and Delay Start when prior to the specified time. When using a redial, resend, or delayed start send transmission job, or authentication feature, to send to the same address from different users, then Batch Send is not possible.


Important • Confirm recipients before sending a fax.

For information on Broadcast Send, refer to "Broadcast Send (Transmitting to Multiple Recipients)" (P.231).

To specify a line to send a fax when the Additional G3 Port Kit 2 (optional) is installed, refer to "Specifying a Line (Port)" (P.193).

The following describes how to enter a phone number with the numeric keypad as an example.

1 Enter a fax number using the numeric keypad.



Fax

4

- **2** To specify multiple recipients, select [+ Add] on the touch screen.
 - If you have entered an incorrect value, press the <C (Clear)> button and enter the correct value.
 - Depending on the settings, a screen to reenter the recipient may be displayed after you specify the recipient and then select [+ Add]. In such case, re-enter the recipient.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax	Recipient[d001]:	Fax 0123456789		🕂 + Add
Address Book	Sho	ow Fax No. / E-mail	Address	A
New Recipients.				
Darken	Lighten	ded nning	-	Resolution Standard (200x

For information how to specify a fax number using the Address Book, refer to "Specifying a Destination Using the Address Book" (P.188).

For information how to specify a fax number using speed dialing, refer to "Speed Dialing (Specifying a Destination Using an Address Number)" (P.190).

For information how to specify a fax number using one touch buttons, refer to "Specifying a Destination Using a One Touch Button" (P.191).

For information on Internet Fax, refer to "About Internet Fax" (P.165).

For information on IP Fax (SIP), refer to "About IP Fax (SIP)" (P.173).

Step 4 Starting the Fax Job


Note

The following describes how to start a fax job.

- **1** Press the <Start> button.
 - Important If the document has been loaded in the document feeder, do not hold down the document while it is being conveyed.
 - A fax cannot be sent if a copy protection code is detected.
 - Depending on the settings, the screen to re-enter the recipient may be displayed after pressing the <Start> button. In this case, re-enter the recipient.
 - If a problem occurs, an error message appears on the touch screen. Follow the instructions of the message to solve the problem.

■If you have more documents


If you have more documents to fax, select [Next Original] on the touch screen while the current document is being scanned. This allows you to send the documents as one set of data.




- **2** While documents are being scanned, select [Next Original].
 - Note

3

- When using the document feeder, load the next document after the machine has finished scanning the first document.
 - When [Next Original] is displayed on the screen shown on the right and no operation is performed during a certain period of time, the machine automatically assumes that there are no more documents.
 - You can change the scan settings of the next document by selecting [Resolution], [Original Size], and [Lighten/Darken] that are displayed after selecting [Next Original].

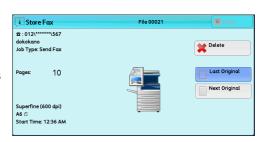



- 4 Press the <Start> button.If you have more documents, repeat steps 3 and 4.
- **5** When all documents have been scanned, select [Last Original].


Load the next document.

1 Store Fax	File 00021	X Close
8 : 012******\567 dokokano Job Type: Send Fax		Delete
Pages: 10		Last Original
Superfine (600 dpi)		Next Original
A6 🛙 Start Time: 12:36 AM	• • •	Change Settings

Step 5 Confirming the Fax Job in Job Status

The following describes how to confirm the status of a fax job.

1 Press the <Job Status> button.



<Job Status> button

2 Confirm the job status.

Note

- Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - From the drop-down menu, you can select [Scan, Fax, & Internet Fax Jobs] and display the desired job.

Active Jobs	Completed Jobs	Secure Print Jobs & More	Print Waiting Job	s Close
All Jobs	×			
All Jobs		rminal	Status	Progress
🚔 Printer & P	rint from Folder Job	s ^{3%}	Print Wait	55/66
💾 Scan, Fax,	& Internet Fax Jobs	;		
Job Flow 8	File Transfer Jobs			
02222 - Copy	11x2	2mm:3%	User Action	55/66
02222 - Copy	11x2	2mm:3%	Copying	55/66

■If undelivered faxes exist

You can confirm undelivered faxes on the [Job Status] screen or in an Activity Report. For information on how to resend or delete undelivered faxes, refer to "Job Status" (P.367). Fax

4

Operations during Faxing


This section describes the available operations during faxing. The following shows the reference section for each operation.

Stopping the Fax Job	
Changing the Scan Settings	

Stopping the Fax Job

To cancel scanning a fax document, use the following procedure.

1 Press either the <Stop> button on the control panel or [Delete] on the touch screen.




1 Store Fax	File 00021	Close
ත : 012******\567 dokokano Job Type: Send Fax		Delete
Pages: 10		Last Original Next Original
Superfine (600 dpi) A6 🛙 Start Time: 12:36 AM	• • •	



2 Select [Delete].

■If [Delete] does not appear on the screen:

1 Press the <Job Status> button.



Close **2** Select the job to cancel. Active Jobs Completed Secure Print Print Waiting Jobs All Jobs • Note • Select [▲] to return to the previous File / Job Type Remote Termina Status Progress screen or [▼] to move to the next screen. 012-345-6789 . 00103 - Send Fax Send Wait 0/1 03344 - Send Fœ 0/1 012-345-6788 v 3 Select [Delete]. 1 Store Fax File 00021 25:012*** **\567 dokokano Job Type: Send Fax X Delete Last Original 10 Pages: Next Original Superfine (600 dpi) A6 ① Start Time: 12:36 AM 4 Select [Delete]. X Close 1 Store Fax ත: 012*** dokokano **\567 💥 Delete Job Type: Send Fax Last Original 10 Pages Next Origino

> Superfine (600 dpi) A6 십 Start Time: 12:36 AM

1 Store Fax

Start K Change Settings.

Changing the Scan Settings


You can change the scan settings while scanning a document.

1 Select [Next Original].

2 Select [Change Settings].

3 Set [Resolution], [Original Size], and use [◄] and [▶] to set the fax density.

For each setting, refer to "Resolution (Specifying the Scanning Resolution)" (P.197), "Original Size (Specifying the Scan Size for the Original)" (P.199), or "Lighten/Darken (Adjusting Fax Density)" (P.195).

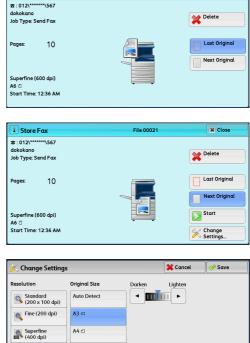

A4 🛙

More...

Superfine (600 dpi) File 00021

4 Select [Save].

🔀 Change Setting	s		💥 Cancel	🤣 Save
Resolution	Original Size	Darken	Lighten	
Standard (200 x 100 dpi)	Auto Detect			
Sine (200 dpi)	A3 🗅			
Superfine (400 dpi)	A4 🗅			
Superfine (600 dpi)	A4 0			
	More			

5 Press the <Start> button.

About Internet Fax

Unlike general fax communications using public phone lines, Internet Fax uses corporate intranets and the Internet to send or receive scanned documents as e-mail attachments.

Because Internet Fax uses existing corporate intranets and the Internet, the transmission is less expensive than general fax transmission.

Note

This feature is not available for some models. An optional component is required. For more
information, contact our Customer Support Center.

- To use Internet Fax, various settings are required to display [Internet Fax] in the drop-down menu on the [Fax/Internet Fax] screen. For more information, consult your system administrator.
- Internet Fax does not support color documents. If the machine receives color documents for Internet Fax (Profile: TIFF-C), the documents are converted to black-and-white documents and printed. To send and receive color documents, use the E-mail service.

For information on how to connect the machine to a network and how to set the network environment, refer to "5 Tools" > "Connectivity & Network Setup" in the Administrator Guide, and the manual included in the Driver CD Kit.

Internet Fax Features

The following describes the Internet Fax features of the machine.

Sending an Internet Fax

The Internet Fax service allows you to send documents scanned by the machine as TIFF-format attachments to Internet Fax-compatible machines.

- Important The TIFF file profiles that can be processed differ depending on the Internet Fax-compatible machine of the recipient. Confirm the profile that can be processed by the recipient's Internet Fax-compatible machine before specifying a profile. For more information, refer to "Sending an Internet Fax" (P.167). For information on profiles, refer to "Internet Fax Profile (Specifying Internet Fax Profiles)" (P.222).
 - If a document is sent to a computer using the Internet Fax service, it cannot be opened in some cases. When sending a document to a computer, use the E-mail service.

■Using the Direct Internet Fax feature

You can send an Internet fax directly to the Internet Fax-compatible machines without going through the SMTP server.

You can switch between Internet Fax and Direct Internet Fax in System Administration mode. These two features cannot be enabled simultaneously. For information on how to switch the feature, refer to "5 Tools" > "Fax Service Settings" > "Internet Fax Control" > "Internet Fax Path" in the Administrator Guide.

Registering e-mail addresses in address numbers

Once you register a recipient's e-mail address in an address number, you do not need to enter the e-mail address each time you send an Internet Fax to the recipient.

Note • The Internet Fax profile and other settings required for transmission can also be registered to address numbers.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Using the Broadcast Send feature

You can send an Internet fax to multiple destinations by specifying multiple e-mail addresses. Also, you can mix regular fax recipients and Internet Fax recipients to send a broadcast transmission for Fax and Internet Fax.

• Up to three broadcast transmissions can be performed. The subsequent jobs will be sent in the sequential order after the former jobs are finished.

For information on how to specify recipients, refer to "Step 3 Specifying Destinations" (P.158) and "Specifying a Destination Using the Address Book" (P.188).

Forwarding files stored in folders

By enabling the forwarding feature and registering a forwarding e-mail address for a folder in advance, the faxes stored in the folder are automatically forwarded to the specified computer, as e-mail attachments. The user, therefore, does not need to walk up to the machine to pick up the faxes.

For more information, refer to "Forwarding Files Stored in a Folder" (P.171).

Sending an Internet Fax to regular fax machines via a relay station

By specifying e-mail addresses in a specific format, you can send faxes from the machine on the network via an Internet Fax-compatible machine (fax gateway) to fax machines that do not support the Internet Fax service.

Important • This feature is available only when the e-mail reception method on the fax gateway is set to SMTP.

For information on the fax gateway feature, refer to "Sending an Internet Fax to regular fax machines via a relay station" (P.170).

Precautions when sending an Internet Fax

The message "Files Sent" displayed on the [Job Status] screen of the machine, the Job History Report, and the Transmission Report indicates that the transmission to the SMTP server configured on the machine has been successful. The Internet Fax transmission to the recipient may not complete if there is a problem on the Internet. In such cases, the machine will not be notified of such transmission error. After sending an important e-mail, we suggest that you confirm it is received, such as by calling the recipient.

You can receive an e-mail of the transmission result if you set Read Receipts and Delivery Receipt when transmitting. For more information, refer to "Acknowledgement Report (Confirming Transmission Results)" (P.205).

Receiving an Internet Fax (Printing an Internet Fax)

The machine automatically prints Internet Fax documents that are sent by e-mail from an Internet Fax-compatible machine.

 Note
 The following TIFF file formats and profiles are available for e-mail reception. File format: TIFF-FX (RFC2301)
 Profile: TIFF-S, TIFF-F, TIFF-J, and TIFF-C
 If an unsupported profile is received, the machine may not be able to print the file. For more information, refer to "Receiving an Internet Fax" (P.168).

Restrictions on the E-mail Server

Depending on the system environment, such as restrictions on the e-mail server, it may not be possible to send or receive large-sized e-mails. Before you set the data-split feature, therefore, check the system environments of the sending and receiving ends.

If data is split into multiple data but each data size is still too large, change the image quality or resolution of each data to make its size even smaller.

Features Unavailable for Sending an Internet Fax

The following features are available for regular fax transmission, but are not available for Internet Fax transmission.

- Starting Rate
- Priority Send
- Delay Start
- Cover Page
- Recipient Print Sets
- F Code
- Remote Folder
- Remote Polling
- Manual Send
- Relay Broadcast
- Sorting received faxes by folder (Folder Selector)
- Direct Fax

If you are using the fax gateway feature, you can set Starting Rate and F Code. For more information on the fax gateway feature, refer to "Sending an Internet Fax to regular fax machines via a relay station" (P.170).

Sending an Internet Fax

The following describes how to send an Internet Fax.

Important • The Cc, Bcc, and Reply To features are not available for Internet Fax.

- Note The machine converts documents to the TIFF format and then sends them as e-mail attachments.
- **1** Select [Internet Fax].

2 Select [New Recipients].

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Fax X	Recipient[]: Fa	×		+ Add	
Fax	She	ow Fax No. / E-mail	Address		
IP Fax (SIP)					A
Internet Fax					
The Redial List.					v
Darken	Lighten Sca 1 Sided	ded nning		Resolution Standard (200x	

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Internet Fax	Recipient[]: Int	ternet Fax		+ Add	
Address	Sho	ow Fax No. / E-mail.	\ddress		
Book					
New Recipients.					
Redial List.					v
Darken	Lighten Sca 1 Sided	ded nning	-	Resolution Standard (200x	

3 Specify a recipient with up to 128 characters using the keyboard displayed on the touch screen.

Recipient List		+ Add	Ilose 🤣
Internet Fax:	•		Oelete Te
· 1 2 3 4	5 6 7 8	90.	Backspace
\ q w e	r t y u i	i o p [
Tone (:) a s d	f g h j	k l ;	• @
Shift z x	c v b n m	n , . /	Shift
More Characters	Space	40 mþ	

Important • If you specify a fax number, the data will not be sent.

- To specify an e-mail address for Direct Internet Fax, use the following format:
 - When specifying a host name, enter FQDN to the right of the @ symbol. Example: local-part@device.domain.com
 - When specifying an IP address, enter the IP address with brackets ("[", "]") to the right of the @ symbol.
 - Example: local-part@[192.168.0.101]

Note

Note

 You can use address numbers, one touch buttons, group dial numbers, or the Address Book to specify e-mail addresses. For more information, refer to "Speed Dialing (Specifying a Destination Using an Address Number)" (P.190), "Specifying a Destination Using a One Touch Button" (P.191), and "Specifying a Destination Using the Address Book" (P.188).

4 Enter a subject and message if necessary.

For information on how to enter the subject, refer to "Internet Fax Subject (Specifying the Internet Fax Subject)" (P.212). For information on how to enter the message, refer to "Internet Fax Message (Editing the Internet Fax Mail Contents)" (P.213).

- If the hard disk of the machine becomes full while a document is being scanned, a screen appears to prompt you to select whether to send the job up to the stored pages or to cancel the job. Select one of the processes.
 - If the hard disk of the machine becomes full during Internet Fax transmission, the transmission is canceled and the document data is deleted.
 - If TIFF-J is specified for the profile, the recipient's computer may not be able to display the attached TIFF file properly. In this case, specify the TIFF-S or TIFF-F profile.
 - If the Internet Fax-compatible machine of a recipient is not the same model as this machine, it may not print the data received from this machine. Confirm the Internet Fax features supported by the destination machine before sending data to it.
 - When specifying an address from the Address Book for Internet Fax, check if the address contains a domain that is not permitted for use. In this case, the address cannot be used.

Receiving an Internet Fax

Reception method

When the machine receives e-mail from an Internet Fax-compatible machine, the received document is printed automatically.

The machine also accepts e-mails addressed to folders on the machine, such as "BOX123@myhost.example.com".

For information on folders, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide. For information on job flow sheets, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" in the Administrator Guide.

- Note If the domains for receiving e-mail are restricted by CentreWare Internet Services, you will only receive Internet Faxes from the permitted domains. For information on domain filtering, refer to "5 Tools" > "Connectivity & Network Setup" > "Other Settings" > "Domain Filtering" in the Administrator Guide.
 - You can confirm the domain setting status in a Domain Filter List. For information on the Domain Filter List, refer to "4 Machine Status" > "Machine Information" > "Print Reports" in the Administrator Guide.

■Printing size

Internet Fax documents received on the machine are printed at the same size as the original documents of the senders.

• When [TIFF-S] is selected for the profile, the printing size will be A4.

When the loaded paper is not the same size as the sent document or when the paper tray used for printing received documents is restricted, the receiving process will be the same as that for regular faxes.

■Receiving e-mail

Each e-mail header and attachment (TIFF file) of received e-mail will be printed.

· Split documents sent by e-mail

If a document scanned by the machine is split into segments according to the [Maximum Number of Pages per Split Send] setting made with CentreWare Internet Services, each segment will be treated as individual e-mail and attached with the details of split data.

Attachments (TIFF format)

If an unsupported attachment file is received, the file is deleted. You can confirm the error in the Job History Report.

When the folder number is not registered

If the specified folder is not registered, the received data is deleted. You can confirm the cause of the problem in the Job History Report.

• Folder operations

If the hard disk space of the machine is insufficient while printing e-mail or storing e-mail to the folder, the page being processed will be deleted at the point in time when the machine runs out of hard disk space.

Restricting incoming e-mail

The machine can be configured to accept or reject e-mails received from specified domains. This feature is called "Domain Filtering". You can register up to 50 domains as permitted or rejected domains.

When receiving an e-mail, the machine checks the Domain Filtering settings. If the domain is registered as a rejected domain, or if the domain is not registered as an accepted domain, the machine will not receive the e-mail. You can confirm the result in the Job History Report. The job history of rejected e-mail is not stored.

For information on Domain Filtering, refer to "5 Tools" > "Connectivity & Network Setup" > "Other Settings" > "Domain Filtering" in the Administrator Guide.

Useful Features

Using an E-mail Address to Send an Internet Fax to a Folder

By specifying the e-mail address of a folder on this machine, you can send an Internet Fax from an Internet Fax-compatible machine to the folder.


When Internet Fax data is received, the machine stores it in the target folder and prints a Folder Report.

This feature is available only when the recipient's machine can receive e-mail via SMTP. To use this feature, the recipient's machine must have a folder that does not have a passcode. For information on how to create a folder, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide.

1 Select [Internet Fax].

Fax / Inter- net Fax		rout tment	Fax / Internet Fax Options	More Options	
Fax X	Recipie	nt[]:Fax			🖷 + Add
Fax		Show	w Fax No. / E-mail.	Address	
IP Fax (SIP)					
Internet Fax					
Redial List.					v
Darken	Lighten	2 Sid Scan 1 Sided		-	Resolution Standard (200x

- **2** Select any option.
- **3** Enter the e-mail address of the target folder in the following format:

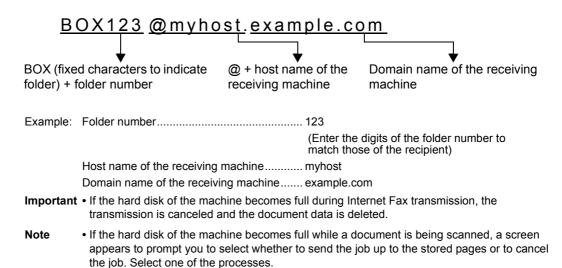

Sending an Internet Fax to regular fax machines via a relay station

By specifying e-mail addresses in a specific format, you can send a document to regular fax machines (that do not support the Internet Fax service) via a network.


This feature enables the machine to first send a document to an Internet Faxcompatible machine (fax gateway) by e-mail via the Internet. The e-mail document is then converted to a fax document on the Internet Fax-compatible machine, and is forwarded to its destinations. If you locate the fax gateway and regular fax machines within an area where the same local rate applies, the fax transmission costs can be reduced.

Important • This feature is available only when the fax gateway can receive e-mail via SMTP.

Note

- The e-mail received by the fax gateway is deleted even if it is not sent correctly as a fax.
 - The setting specified in [Starting Rate] on the [Fax/Internet Fax Options] screen is used as the communication mode from the fax gateway to the destination fax machine.
 - You can restrict fax forwarding in [Fax Transfer from Address Book] and [Fax Transfer Maximum Data Size] in System Administration mode.
- **1** Select [Internet Fax].
- 2 Select any option.

3 Enter the e-mail address of the receiving machine in the following format:

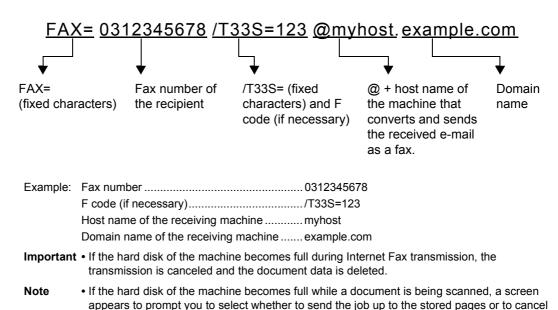

the job. Select one of the processes.

Forwarding Files Stored in a Folder

You can automatically forward faxes stored in a folder, as e-mail attachments.

Faxes sent to folders using the fax signal method (proprietary communication procedures), F Code method, or DTMF method, and faxes stored in folders by the Folder Selector feature can be forwarded as e-mail attachments.

Important • This feature is available only when the mail receiving protocol is SMTP.

For information on how to forward files in a folder, send files to a folder, use the Folder Selector to receive files in a folder, and print or delete files received in a folder, refer to "Checking/Operating Files in a Folder" (P.325).

For information on how to set the Folder Selector feature, refer to "5 Tools" > "Fax Service Settings" > "Fax Received Options" in the Administrator Guide.

Forwarding an Internet Fax

The machine can automatically forward faxes received in a folder or faxes stored in a folder by using the Folder Selector feature to the forwarding address specified for the folder as e-mail.

With this forwarding feature, you can receive Internet Fax documents on your computer without having to walk up to the machine to pick them up. You can also save paper by displaying the documents on your computer screen.

■How to forward an Internet Fax

The following operations are required for using the forwarding feature of Internet Fax.

On the machine sending a fax

Sending faxes to the folder using the fax signal method (proprietary communication procedure), F Code method, or DTMF method.

For information on the transmission method, refer to "More Options" (P.225).

• On the machine receiving the fax in a folder and forwarding an Internet fax

Creating a job flow sheet to specify a forwarding address and then making a link between the job flow sheet and the folder.

For information on how to create a job flow, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" in the Administrator Guide.

Important • Do not set the address of the machine as the forwarding address.

• You can register up to 100 forwarding addresses.

Note


- [Folder Number] and [Passcode] are required by the sender. Inform the sender of the settings.
- If the fax you received is a JBIG-compressed image, and if the Internet Fax profile of the forwarding destination is set to TIFF-F, the image is converted into MH format when forwarding. Also, if the Internet Fax profile is TIFF-S, the fax image is forwarded as is without changing the size and resolution settings.
- If the hard disk in the machine becomes full while the machine is receiving an Internet fax, the reception is canceled and the partly received file is deleted.
- If there is a problem with the data during Internet Fax forwarding, the forwarding is canceled and the received file is stored in the folder.
- If forwarding using SMTP fails, the received file is stored in the folder.
- You can confirm the forwarding result in the Job History Report.

About IP Fax (SIP)

IP Fax (SIP) refers to the process of sending and receiving faxes using an IP Network in a corporate intranets.

The process is compliant with the T.38, an ITU recommendation. Because the IP Fax (SIP) feature uses existing corporate intranets, the transmission is less expensive than G3 fax transmission which uses the public telephone network.

Note
 The communication between IP Fax (SIP) devices are available for our compatible machines in a corporate intranet. (Able 1407 is not available.) Hereinafter, IP Fax (SIP) device is referred to as our IP Fax (SIP) compatible machine.

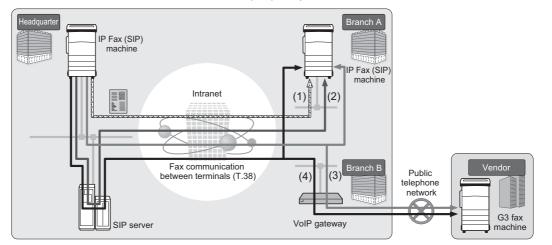

The IP Fax (SIP) feature can be configured with a SIP server and a VoIP Gateway. The functions of the devices are as follows:

■SIP Server

Using a SIP Server, IP Fax designation can be designated by SIP user name and telephone number. The main features of a SIP server are:

- Receives address information of the machine in the IP network, and registers the address in the database (registrar server).
- Relays request and response from the SIP client (proxy server).

■VoIP Gateway

A VoIP gateway allows the machine to relay fax communications between the IP network and the public telephone network. A VoIP gateway is required for communicating with a G3 Fax device.

- Note
- Cisco MCS7816H3 (Cisco Unified Communications Manager 6.1 is installed) is validated as a SIP server available for the machine.
 - Cisco CISCO2801-V/K9 (IOS 12.4) is validated as a VoIP Gateway available for the machine.
 - For more information on configuration of SIP servers and VoIP gateways, contact our Customer Support Center.
 - The communication mode supported by the IP Fax (SIP) feature is G3.

The IP Fax (SIP) feature can be used in the following four connection configurations:

Note • Method to input IP Fax destination differs depending on the connection configuration.

■IP Fax (SIP) Device Only

IP Fax (SIP) devices communicate with each other directly, using an IP network (Intranet).

SIP device address of the communication target shall be designated as an IP Fax (SIP) between IP Fax (SIP) devices. For example, 1111@192.168.1.1 (address of SIP device).

SIP Server Installed

IP Fax (SIP) devices communicate via a SIP server, using an IP network (Intranet).

Since a SIP server utilizes address translation, an IP fax (SIP) can be sent to IP Fax (SIP) devices by a designated SIP user name or telephone number. For example, 1111 (SIP user name) or 0312345678 (telephone number).

VoIP Gateway Installed

In addition to direct communication between IP Fax (SIP) devices in an IP network (Intranet), communication with a G3 Fax device, which does not have an IP Fax (SIP) feature, is possible using a VoIP gateway.

An IP fax (SIP) can be sent in the following two methods:

- For an IP Fax (SIP) device, designate the SIP device address of the communication target. For example, 1111@192.168.1.1 (SIP device address).
- For a G3 Fax device, designate the telephone number. For example, 0312345678 (telephone number).

■SIP Server and VoIP Gateway Installed

In addition to the communication between an IP Fax (SIP) device using a SIP server in an IP network (Intranet), communication with a G3 Fax device, which does not have a IP Fax (SIP) feature, is possible using a VoIP gateway.

Since a SIP server utilizes address translation, an IP Fax (SIP) can be sent to an IP Fax (SIP) device by designating the SIP user name or telephone number.

For a G3 Fax device, an IP fax can be sent by designating a telephone number.

For example, 1111 (SIP user name) or 0312345678 (telephone number).

IP Fax (SIP) Features

The following describes the IP Fax (SIP) features.

Operations similar to operating regular fax

By selecting [IP Fax (SIP)] and entering an address in the appropriate form, you can send and receive fax documents in a similar manner as operating regular fax.

Also, you can use most features available for regular fax such as the redial feature, remote folder, and other features.

For other available features, refer to "Difference from other fax features".

For operations of fax documents received by using the Remote Folder, please refer to "Fax/Internet Fax" (P.186).

Reduction of telecommunication fee

Within an intranet, communication between IP Fax (SIP) devices requires no telecommunication fee. For this reason, the IP Fax (SIP) feature is suitable for sending and receiving fax documents between a head office and branches in an intranet.

By using a VoIP gateway, you can reduce the telecommunication cost for sending fax documents to the outside of the intranet.

Communication with regular fax machines

When a VoIP gateway is installed and configured for IP Fax (SIP), you can have fax communication with G3 fax machines connected to the public telephone network. For the configuration of a VoIP gateway, check with your network administrator. The Starting Rate supported in IP Fax (SIP) is G3.

Direct Fax

You can use the Direct Fax feature to fax documents created with your computer applications directly in the same manner as printing. For the Direct Fax feature, refer to "Sending Fax" (P.394).

Forwarding feature registered in job flow sheet

By registering a job flow, you can forward documents stored in folder or scanned documents via IP Fax (SIP).

Registering in the Job Memory

By storing a setting you frequently use in IP Fax (SIP), you can call the setting with a single button operation.

Feature Comparison with Regular Fax

	Regular		IP Fax (SIP)	
Features	fax ^{*1}	IP Fax (SIP) only	SIP server	VoIP Gateway
Redial List	0	0	0	0
Relay Broadcast	0	X	Х	X*2
Local Name	0	0	0	Х
Starting Rate	0	0	0	0
Priority Send	0	0	0	0
Delay Start	0	0	0	0
Cover Page	0	0	0	0
Recipient Print Sets	0	0	0	Х
Remote Folder	0	O ^{*3}	O ^{*3}	X*2
F Code	0	0	0	0
Remote Polling	0	O ^{*4}	0 ^{*4}	0 ^{*4}
On-hook	0	Х	Х	Х
Manual Send	0	Х	Х	Х
Manual Receive	0	X	Х	Х
Direct Fax	0	0	0	0
Folder Selector - Service Setup	0	X	Х	Х
Folder Selector Setup	0	0	0	0
Output Destination Setup	0	0	0	0

The feature comparison between the IP Fax (SIP) and the regular fax is as follows:

O Available

X Not available

 $1. \hspace{0.1in} \text{Refers to G3 fax machines connected to the public telephone network}.$

2. Available for the Remote Folder and the Relay Broadcast using F code.

3. Available for the Remote Folder using the fax signal method. Unavailable for the DTMF method.

4. Available for the Remote Polling and the Store for Secure Polling. Unavailable for the On-hook.

• The buttons of some unavailable features are not displayed on the control panel.

Sending an IP Fax (SIP)

The following describes the procedure of sending IP Fax (SIP).

1 Select [IP Fax (SIP)].

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax x	Recipient[]: Fax	×		+ Add
Fax	Sho	ow Fax No. / E-mail	Address	
IP Fax (SIP)				
Internet Fax				
Redial List.	•			v
Darken	Lighten Lighten Scar 1 Sided	ded nning	-	Resolution Standard (200x

2 Configure features as necessary.

For available features, refer to "Fax/Internet Fax" (P.186).


3 Specify a recipient.

Example:

Telephone number: 0312345678

SIP user name: 1111

SIP device address: 1111@192.168.1.1

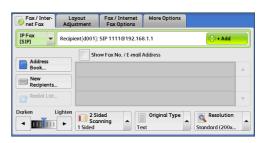

Fax


- Important The method to input the IP Fax (SIP) destination differs depending on the fax type of the recipient or the connection configuration. For these differences, refer to "About IP Fax (SIP)" (P.173).
 - Check the recipient information before sending the fax.

For the method to specify a recipient using the keyboard, refer to "Entering Text" (P.68).

For other methods to specify a recipient, refer to "Fax/Internet Fax" (P.186).

For broadcast sending, refer to "Broadcast" (P.231).

- **4** Press the <Start> button.
 - Important If the document has been loaded in the document feeder, do not hold down the document while it is being conveyed.
 - A fax cannot be sent if a copy protection code is detected.
 - Depending on the settings, a screen to re-enter the recipient may be displayed after you specify the recipient. In such cases, re-enter the recipient.
 - If a problem occurs, an error message appears on the touch screen. Follow the instructions of the message to solve the problem.



If a fax cannot be sent, refer to "15 Problem Solving" > "Trouble during Faxing" in the Administrator Guide.

For the method to cancel sending a fax, refer to "Stopping the Fax Job" (P.162).

Receiving an IP Fax (SIP)

Received fax documents are printed automatically in a manner similar to that of a regular fax.

For information on operations of the Remote Folder, refer to "Receiving Faxes" (P.239).

About Server Fax

If your machine supports the Scan service, installing the Server Fax Kit (optional) allows you to use the Fax service of a Server Fax server.

When your machine does not support the Fax service and supports the Server Fax service only, the Server Fax service will be enabled automatically.

When your machine supports both the Fax and Server Fax services, manually switch to the Server Fax service in System Administration mode.

With this Server Fax service, you can transfer image data received by the machine to the Server Fax server and can transfer image data received by the Server Fax server to the machine via a network based on the settings you made.

The Server Fax service supports the SMB, FTP, and SMTP protocols.

For information on how to connect the machine to a network and how to set the network environment, refer to the Administrator Guide, and the manual included in the Driver CD Kit.

Important • While the Server Fax service is enabled, the Fax service is detected as "not installed" even if Fax Kit 2 is installed on the machine. During that time, therefore, fax transmission and reception are disabled and printed reports show that the machine does not support the Fax service.

Note

- The Server Fax service cannot be used together with the Fax or Internet Fax service.
 - This service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Sending a Server Fax

1	Select [Fax] on the [Services Home] screen.	Сору	Fax	E-mail		Language Screen Brightness
		G Simple Copy		Scan to PC	1/2	Setup Activity Report
		Store to Folder	Send from Folder	Stored Programming		Fax Receiving Mode Print Mode
2	Use the keyboard to directly enter a destination, or use the Address Book to specify a destination.		ayout Transmissi ustment Options SpeedDial Name	n	Fax Num	
		Dook New Recipients Darken Lighten	2 Sided Scanning	Original Type Text	L 💌	Resolution

For information on how to use the keyboard, refer to "Specifying a Destination Using the Keyboard Screen" (P.191).

For information on how to use the Address Book, refer to "Specifying a Destination Using the Address Book" (P.188).

Important • When the Server Fax service is used for fax transmission, the attributes other than [Fax Number], [Name], and [Index] are ignored in the Address Book.

Features Unavailable for Sending a Server Fax

The following features are available for regular faxes, but are not available for server faxes.

Screen	Features
Fax	Resolution*
Transmission Options	Priority Send
	Cover Page
	Recipient Print Sets
	Remote Folder
	F Code
More Options	Remote Polling
	Store for Polling
	On-hook

* When the SMB or FTP protocol is used, the available options are [Standard (200 x 100 dpi)] and [Fine (200 dpi)], and the resolution of data that is sent to a final destination depends on the resolution setting on the fax server. When the SMTP protocol is used, the available option is [Fine (200 dpi)] only.

You can specify the following settings of the Server Fax service under [Tools] > [System Settings] > [Scan Service Settings] > [Scan Defaults]:

- Background Suppression
- Lighten/Darken
- Sharpness

Features Available for Sending a Server Fax (When SMTP is Used)

When the SMTP protocol is used, the Server Fax service is compliant with the E-mail settings configured in System Administration mode. The following E-mail settings, however, are not available for the Server Fax service:

- Read Receipts
- Reply To


Simple Fax

You can select [Fax/Internet Fax] or [Simple Fax] on the [Services Home] screen to set the features for the Fax service.

This section describes the features you can select on the [Simple Fax] screen. [Simple Fax] allows you to use only basic features to easily send faxes. The following shows the reference section for each feature.

Specifying a Destination Using the Numeric Keypad	
Speed Dialing (Specifying a Destination Using an Address Number)	
Specifying a Destination Using a One Touch Button	
Resolution (Specifying the Scanning Resolution)	
Original Type (Selecting the Document Type)	
2 Sided Scanning (Transmitting 2-sided Originals)	

- **1** Select [Simple Fax] on the [Services Home] screen.
 - Note
- [Simple Fax] is not displayed on the [Services Home] screen when the Server Fax service is enabled.



Copy	Fax / Internet Fax	E-mail		Language Screen Brightness
G Simple Copy	Simple Fax	Scan to PC	1/2	Setup
Store to Folder	Send from Folder	Stored Programming		Activity Report Fax Receiving Mode Print Mode


Resolution	Original Type	2 Sided	


- For the Simple Fax service, you can only set [Resolution], [Original Type], and [2 Sided Scanning]. In addition, when you use this service, [Mixed Size Originals] is set to [On], and [Transmission Header Text] is set to [Display Header]. If you want to set other options, use [Fax/Internet Fax] on the [Services Home] screen to send faxes.
 - You cannot switch between [Fax/Internet Fax] and [Simple Fax]. To switch one to another, you must return to the [Services Home] screen. Once you return to the [Services Home] screen, the settings you have made in [Fax/Internet Fax] or [Simple Fax] will be cleared.

Specifying a Destination Using the Numeric Keypad


Specify a destination using the numeric keypad.

- 1 Enter a fax number using the numeric keypad.
 - Note If you have entered an incorrect value, press the <C (Clear)> button and enter the correct value.





2 Press the <Start> button.



<Start> button


Fax 4

Speed Dialing (Specifying a Destination Using an Address Number)

You can use address numbers to specify recipients. Register the address numbers for speed dialing in advance.


When you specify address numbers, confirm that the corresponding fax numbers are correctly registered on the machine. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

- Note If you have entered an incorrect value, press the <C (Clear)> button and enter the correct value.
 - You can specify only fax recipients using address numbers for the Simple Fax service. The numbers registered for the Internet Fax service and the IP Fax (SIP) service cannot be specified.
- **1** Press the <Speed Dial> button, and enter a 4-digit address number.
 - Note
 If you have entered an incorrect value, press the <C (Clear)> button and enter the correct value.



<Speed Dial> button

2 Press the <Start> button.



<Start> button

3 Confirm the destination displayed on the touch screen, and then select [Yes].

Specifying a Destination Using a One Touch Button

You can use the one touch buttons to specify recipients. One touch buttons correspond to the address numbers from 0001 to 0070, or 0001 to 0060. For example, when the number you want to dial is registered to the address number 0001, press one touch button <1>.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.


Note • There are two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following. By default, [Type 1] is selected.

• [Type 1] Buttons 1 to 70 are used for address numbers and they correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and correspond to the registered stored programs 1 and 2.

• [Type 2] Buttons 1 to 60 c


Buttons 1 to 60 are used for address numbers and they correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and correspond to the registered stored programs 1 to 12.

1 Press a one touch button. Confirm that the recipient (fax number) specified with the one touch button is displayed on the touch screen.

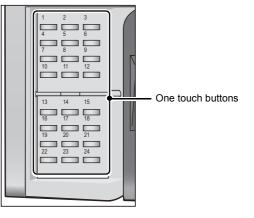

Important • One touch buttons have a sensor to detect which page of the one touch buttons (1 - 24, 25 - 48, 49 - M02) is currently opened. Before pressing a one touch button, turn over the one touch panel completely, and take your hand off from the panel. Do not press the button while you are turning over the panel.

- Do not place any objects near the one touch buttons or spill any liquid over them.
- Note
- Turn the one touch panel over to press one touch buttons 25 and above.
- If you have entered an incorrect value, press the <C (Clear)> button and enter the correct value.
- **2** Press the <Start> button.



<Start> button

3 Confirm the destination displayed on the touch screen, and then select [Yes].

Resolution (Specifying the Scanning Resolution)

You can set the resolution for the documents to be scanned.

- Note
 The machine scans a document at the specified resolution, but if the recipient's machine does not support the resolution, the machine automatically changes the resolution to one supported by the recipient's machine and there is a corresponding loss in quality.
 - The higher the resolution, the lower the transmission speed. Usually, we recommend that you select [Superfine (400 dpi)] or lower.
 - Only [Fine (200 dpi)] is available for the Server Fax service.

You can specify the resolution for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

1 Select [Resolution].

🔍 Standard (200 x 100 dpi)	
🔍 Fine (200 dpi)	
属 Superfine (400 dpi)	
Superfine (600 dpi)	
Resolution X Standard (200x Text	riginal Type

Standard (200 x 100 dpi)

Select this option when transmitting standard documents. (200 x 100 pels/25.4 mm)

■Fine (200 dpi)

Select this option when transmitting documents with small text or detailed images. (200 x 200 pels/25.4 mm)

■Superfine (400 dpi)

Select this option when transmitting documents with fine images. (400 x 400 pels/25.4 mm)

Superfine (600 dpi)

Select this option when transmitting documents with extremely fine images. (600 x 600 pels/25.4 mm)

Original Type (Selecting the Document Type)

You can select the type of the original document, such as text and photo documents.

1 Select [Original Type].

Recipient	
	Text
	Photo & Text
	Photo
Resolution	Original Type

■Text

Select this option when transmitting a document that contains only text.

■Photo & Text

Select this option when transmitting a document that contains both text and photos. The machine automatically distinguishes the areas with text and those with photos, and sets the appropriate image quality for each area of the document.

■Photo


Select this option when transmitting a document that contains only photos.

Note • If reduced in size, the scan documents may have stripes in the areas with photos.

2 Sided Scanning (Transmitting 2-sided Originals)

You can scan a 1-sided or 2-sided document on one or both sides of paper for fax transmission.

- The image on the back side of a 2-sided document is rotated so that it is placed in the same orientation as the image on the front side.
- **1** Select [2 Sided Scanning].

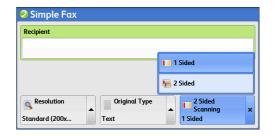

Fax 4

■1 Sided

Select this option to scan one side of the document.

■2 Sided

Note

Select this option to scan both sides of the document.

■2 Sided (Skip Blank Pages)

Select this option to scan only the document pages that are not blank. You do not need to take into account which side is the front when sending documents.

- Important If you select [2 Sided (Skip Blank Pages)] in [2 Sided Scanning] when the Skip Blank Pages feature is enabled, image loss may occur on the fax document depending on the recipient's machine. For example, when you select [2 Sided (Skip Blank Pages)] to send an A4 fax document, image loss may occur in the area where the edge erase amounts is set when the fax is printed on an A4 document by the recipient's machine.
 - When you select [2 Sided (Skip Blank Pages)] on the [Simple Fax] screen, the machine is set to select [100%] in [Reduce/Enlarge] automatically. When you select an option other than [2 Sided (Skip Blank Pages)], the machine is set to select [Auto %] in [Reduce/Enlarge] automatically.
 - When [2 Sided (Skip Blank Pages)] is selected, the setting of [Original Type] changes to [Text].
 - You can also switch whether to enable [2 Sided (Skip Blank Pages)] by pressing the <Energy Saver> button while setting the fax features.
 - The level of accuracy in which the machine determines whether a page is blank or not differs depending on the document. For example, if a blank page has background shadows, the machine may not determine the page as a blank page.
 - [2 Sided (Skip Blank Pages)] is displayed only when [Skip Blank Pages] is enabled. For more information, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Skip Blank Pages" in the Administrator Guide.

Fax/Internet Fax

You can select [Fax/Internet Fax] or [Simple Fax] on the [Services Home] screen to set the features for the Fax service.

This section describes the features you can select on the [Fax/Internet Fax] screen. The following shows the reference section for each feature.

	Internet Fax/Fax/IP Fax (SIP) (Selecting Internet Fax/Fax/IP Fax (SIP))1	186
	+ Add (Sending Faxes to Multiple Recipients)	187
	Specifying a Destination Using the Address Book	188
	Speed Dialing (Specifying a Destination Using an Address Number)	190
	Specifying a Destination Using a One Touch Button	191
	Specifying a Destination Using the Keyboard Screen	191
	Specifying a Destination Using the Redial Feature	192
	Specifying a Line (Port)1	193
	Entering Specific Symbols	193
	Removing/Confirming a Recipient	194
	Lighten/Darken (Adjusting Fax Density)	195
	2 Sided Scanning (Transmitting 2-sided Originals)1	195
	Original Type (Selecting the Document Type)	197
	Resolution (Specifying the Scanning Resolution)	197
c	u can customize the layout of the features displayed on the [Fax/Internet Fax] screen. For mo	re

You can customize the layout of the features displayed on the [Fax/Internet Fax] screen. For more information, refer to "5 Tools" > "Fax Service Settings" > "Screen Defaults" in the Administrator Guide.

1 Select [Fax/Internet Fax] on the [Services Home] screen.



2 Select a feature on the [Fax/Internet Fax] screen.

Internet Fax/Fax/IP Fax (SIP) (Selecting Internet Fax/Fax/IP Fax (SIP))

You can switch between Internet Fax, Fax, and IP Fax (SIP) as necessary.

- This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Fax], [IP Fax (SIP)], or [Internet Fax] from the drop-down menu.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Fax x	Recipient[]: Fa	x		+ Add	
Fax	She	ow Fax No. / E-mail	Address		
IP Fax (SIP)					*
Internet Fax					
Redial List.					v
Darken	Lighten	ded nning	-	Resolution Standard (200x	

4 Fax

+ Add (Sending Faxes to Multiple Recipients)

The Broadcast Send feature allows you to transmit the same document to multiple recipients in a single operation. There is no need to repeat the same operation for each recipient.

When the Additional G3 Port Kit 2 (optional) is installed, you can use the extra lines to make multiple transmissions simultaneously with Broadcast Send.

If you specify Broadcast Send, the machine prints a Broadcast/Multi-Poll Report after the Broadcast Send operation finishes.

- Note
 The maximum number of recipients that you can specify at one time is as follows: Using the numeric keypad only: 200 locations; using address numbers only: 600 locations; and using both the numeric keypad and address numbers: 600 locations. For Server Fax, the maximum number of recipients that you can specify at one time is 50.
 - The address numbers 0001 0070, or 0001 0060 correspond to the one touch buttons 1 70, or 1 60. For more information on the one touch buttons, refer to "Control Panel" (P.59).
 - When using Broadcast Send, the Cover Page and Remote Folder features are not available even if they are enabled on the control panel. If you want to use [Cover Page] and [Remote Folder], set them when registering each recipient in an address number.
 - You cannot specify [Confirmation Options].

Show Fax No./E-mail Address

If you select this check box, the recipient's name will not be displayed in the recipient field.

Enable Broadcast

To prevent missending a fax to multiple recipients, you can set whether to use Broadcast Send prior to specifying multiple recipients. Select the [Enable Broadcast] check box to specify multiple recipients.

[Enable Broadcast] is displayed only when [Broadcast Checkbox on 1st Tab] is set to [Enabled]. For more information on the setting, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Broadcast Checkbox on 1st Tab" in the Administrator Guide.

1 Select the first recipient.



- 2 Select [+ Add].
 - Depending on the settings, a screen to re-enter the recipient may be displayed after specifying the recipient and then selecting [+ Add] on the touch screen. In such cases, re-enter the recipient.
- **3** Select the next recipient.
- 4 Repeat steps 2 and 3.
- **5** Press the <Start> button.
- **6** Select [Yes] on the confirmation screen to start transmission.

Specifying a Destination Using the Address Book

The following describes how to use the Address Book to specify recipients.

The Address Book shows the fax numbers registered in the address numbers.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Important • When the Server Fax service is used for fax transmission, the attributes other than [Fax Number], [Name], and [Index] are ignored in the Address Book.

1 Select [Address Book].

- Fax / Internet Fax
 Layout Fax Options
 More Options

 Fax
 Recipient(d001): Fax 0123456789
 + Add

 Address
 Show Fax No. / E-mail Address
 Address

 New Recipienta...
 Show Fax No. / E-mail Address
 Address

 Recipienta...
 Period List...
 V

 Darken
 Lighten
 Scanning
 Original Type
 Resolution Standard (200x...
- **2** Select the item you want to set as a recipient, and select [Add].

Fax Ada	tress Book			Clos	e
List all public entrie Speed Dial	s Show Fax No. / E-mail Address	Go to	,	Chain Dial Recipient(s)	l
1400	SpeedDial Name1400 <fax 012<="" td=""><td></td><td>Add →</td><td></td><td></td></fax>		Add →		
1401	<fax 012-345-6789-1401=""></fax>				1
1402	SpeedDial Name1402 <fax 012\<="" td=""><td></td><td></td><td></td><td>Ĩ</td></fax>				Ĩ
1403	<fax *****="" -1403="" 012:-345=""></fax>				1
1404	SpeedDial Name1404 <fax 012-<="" td=""><td></td><td>i</td><td></td><td></td></fax>		i		

Note

- To specify multiple recipients, specify the recipients one after another.
 - You can sort recipients in alphabetical order or address number order.
 - To search fax numbers by other methods, select and switch to [List all public entries], [Retrieve fax entries using index], [List all group entries], or [Search Network] from the dropdown menu on the [Fax Address Book] screen. The methods that appear in the drop-down menu depend on the settings made in System Administration mode.
- Depending on the network settings, [Search Network] may not appear in the drop-down menu. For information on the Network settings, refer to "5 Tools" > "Connectivity & Network Setup" > "Remote Authentication/Directory Service" > "LDAP Server/Directory Service Settings" in the Administration Guide.
- Important When specifying an address from the Address Book for Internet Fax/IP Fax (SIP), check if the address contains a domain that is not permitted for use. In such cases, the address cannot be used.

Using the Address Book

You can search for the fax numbers of recipients using [List all public entries], [Retrieve fax entries using index], [List all group entries], and [Search Network].

You can set the starting numbers of address numbers in System Administration mode. For information on how to change the settings, refer to "5 Tools" > "Fax Service Settings" > "Screen Defaults" > "Address Book Speed Dial Default" in the Administrator Guide.

■List all public entries

Displays the list of registered recipients. Select $[\blacktriangle]$ to return to the previous screen or $[\lor]$ to move to the next screen. Select the item you want to set as a recipient, and select [Add].

Retrieve fax entries using an index

Allows you to search for the fax numbers or group names of recipients using texts and numbers specified when registering address numbers. Select the item you want to set as a recipient, and select [Add].

■List all group entries

Allows you to search for the pre-registered group dial numbers. Select [\blacktriangle] to return to the previous screen or [\triangledown] to move to the next screen. Select the item that you want to specify as a recipient, and select [Add].

For more information on how to register groups dial numbers, refer to "5 Tools" > "Setup" > "Create Fax Group Recipients" in the Administrator Guide.

Search Network

Allows you to search for fax numbers not in the local address book but the one registered in a server on a network. Set any items for [Name], [Fax Number], [Custom Item], and select [Search]. Select the item you want to specify as a recipient, and select [Add].

■Go to

Enter the desired speed dial number with the numeric keypad. The corresponding address appears at the top of the list.

■[1] button

Select an item of which details you want to check, and select the [1] button.

■Chain Dial

Allows you to combine the fax numbers registered in one touch buttons, speed dial, and the address book, respectively, and the numbers entered using the numeric keypad to specify as one recipient. You do not need to use the [+ Add] button.

Show Fax No./E-mail Address

When you select this check box, the names of recipients will not be displayed in the recipient fields.

Speed Dialing (Specifying a Destination Using an Address Number)

You can use address numbers to specify recipients. Register the address numbers for speed dialing in advance.

You can use wildcards (the <*> button on the numeric keypad or [*] on the keyboard screen) for the last digit or last two digits of address numbers.

The following tables show examples of using wildcards to specify multiple recipients.

• When using a wildcard for the last digit

How to Enter Wildcard	Target Address Numbers	The Number of Target Addresses
000*	0001 - 0009	9
001*	0010 - 0019	10
010*	0100 - 0109	10
100*	1000 - 1009	10

• When using wildcards for the last two digits

How to Enter Wildcard	Target Address Numbers	The Number of Target Addresses
00**	0001 - 0099	99
01**	0100 - 0199	100
10**	1000 - 1099	100

When you specify address numbers, confirm that the corresponding fax numbers are correctly registered on the machine. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Note

• The maximum number of recipients that you can specify at one time is as follows: Using address numbers only: 600 locations Using the numeric keypad in combination with address numbers: 600 locations

- An address number is always displayed in four digits. If [Auto Validation of Speed Dial Entry] is set to [Validate entry after a fixed time] in System Administration mode, and for example when you enter "**", "0" is automatically added to the beginning of the wildcards to display "00**". For more information, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Auto Validation of Speed Dial Entry" in the Administrator Guide.
- You can use wildcards only for the last digit or last two digits of address numbers. The following is not available: "*100", "**10", and "1*00"
- Press the <Speed Dial> button, and enter a 4-digit address number. Repeat this step for each additional recipient.



<Speed Dial> button

4 Fax

Specifying a Destination Using a One Touch Button


You can use the one touch buttons to specify recipients.

One touch buttons correspond to the address numbers from 0001 to 0070, or 0001 to 0060.

For example, when the number you want to dial is registered to the address number 0001, press one touch button <1>.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

- There are two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following. By default, [Type 1] is selected.
 - [Type 1]
 - Buttons 1 to 70 are used for address numbers and correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and they correspond to the registered stored programs 1 and 2.
 - [Type 2]
 - Buttons 1 to 60 are used for address numbers and correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and they correspond to the registered stored programs 1 to 12.
- **1** Press a one touch button. Confirm that the recipient (fax number) specified with the one touch button is displayed on the touch screen.



- Important One touch buttons have a sensor to detect which page of the one touch buttons (1 24, 25 48, or 49 M02) is currently opened. Before pressing a one touch button, turn over the one touch panel completely, and take off your hand from the panel. Do not press the button while you are turning over the panel.
 - Do not place any objects near the one touch buttons, nor spill any liquid over them.
- Note
- To specify multiple recipients, press one touch buttons continuously.Turn the one touch panel over to press the one touch buttons 25 and above.

Specifying a Destination Using the Keyboard Screen

You can specify recipients using the keyboard screen.

- Important When transmission to a certain recipient is prohibited in System Administration mode, the [New Recipients] button cannot be used.
- **1** Select [New Recipients].

😺 Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Fax	Recipient[]: Fo	1X		H + Add	
Address	Sh	ow Fax No. / E-mail.	Address		
Book	d001	<fax 01234567<="" td=""><td>89></td><td></td><td>*</td></fax>	89>		*
New Recipients					
🕋 Redial List					Ŧ
Darken I		ided unning		Resolution Standard (200x	•

2 Specify a recipient with up to 128 characters using the keyboard displayed on the touch screen.

Recipient L	.ist							l	₽ + A	ıdd	🛷 Close
Fax:		•									Selete Tex
• 1	2	3 4		5 6		7	8	9	0		Backspace
۲ q	w	e	r	t	У	u) i	0	F) [1
Tone (:)	a 🗌	s d		f		h	j	k	ι	;	•
Shift	z	x	с	v	b	n	m],		.] /	Shift
More Char	acters			Spa	ce			(m	щþ		

- When the Server Fax service is used, the destination must be less than 50 characters long. The available characters are as follows:
 - 0 to 9 Numeric characters
 - Pause
 - # A starting character for a group number
 - A delimiter for private data. Using this character before and after private data hides the destination string.
 - S A character for password verification
 - : DTMF signal
 - = A character to wait for dial tones
 - + Available, but ignored
 - (Space) Available, but ignored

For more information, refer to the documentation provided with the Server Fax Kit.

Specifying a Destination Using the Redial Feature

You can specify recipients using the Redial feature.

- Important When transmission to a certain recipient is prohibited in System Administration mode, the [Redial list] button cannot be used.
- **1** Select [Redial List].

2 Select items you want to specify as a recipient, and select [Close].

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Fax	Recipient[]: Fa	×		💷 + Add	
Address	She	ow Fax No. / E-mail.	Address		
Book	d001	<fax 01234567<="" th=""><td>89></td><td></td><td>*</td></fax>	89>		*
New Recipients.					
Redial List.					v
Darken	Lighten	ded nning		Resolution Standard (200x	

2	Redial List			🤣 Close
	SpeedDial	Name		
1.	#01	GrpName0(Total Entries: 6)<1500,1501,1502,1503,15	04,1505>	
2.	#01	GrpName0(Total Entries: 6)<1500,1501,1502,1503,15	04,1505>	
3.	#02	GrpName1(Total Entries: 2)<15**,1600>		
4.	#03	GrpName2(Total Entries: 2)<150*,158*>		
5.	#04	GrpName3(Total Entries: 2)<1545,1525>		
6.	#05	GrpName4(Total Entries: 20)<1601,1602,1543,1545,1	500,1506,1	507, 🔻

Fax

4


Specifying a Line (Port)

You can specify lines using the keyboard screen. When the Additional G3 Port Kit 2 (optional) is installed, you can specify the line (port) and send faxes. Local terminal information can be registered to each line. You can use each line for a different purpose.

Important • When transmission to a certain recipient is prohibited in System Administration mode, the [New Recipients] button cannot be used.

For information on how to set [Local Terminal Information], refer to "5 Tools" > "Fax Service Settings" > "Local Terminal Information" in the Administrator Guide.

1 Select [New Recipients].

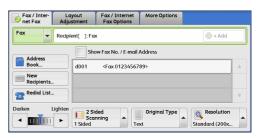

2 Select [Shift], and enter in the following format: "<", "port number", ">", "recipient's telephone number".



Fax 4

The following shows the corresponding lines to each port:

<1>: Line 1

<2>: Line 2

<3>: Line 3

Example when using Line 1: <1>XXXXXXXXXX

Recipient List		+ Add	🤣 Close
Fax:	-		👌 Delete Te
~ 1 2 3		B 9 0 _	Backspace
\ Q W E		I O P {	- @
Shift Z	C V B N	M < > ?	Shift
More Characters	Space	du ub	

Entering Specific Symbols

When specifying a recipient, you can use the following features to enter specific symbols on the touch screen.

Feature	Button	Function	Input method
Enter pause	- or <pause> (-)</pause>	Used to enter a pause. One pause is 3 seconds. You can enter pauses of 6 seconds, 9 seconds, etc. by pressing the button additional times.	Press the <pause> button. (Example) 0-123 0123</pause>

Feature	Button	Function	Input method
Transmit using a password	S	When a password has been set, transmission will start only if the password matches the ID number on the remote terminal.	 Select [New Recipients] on the [Fax/Internet Fax] screen to display the keyboard. Select [S]. (Example) 0312345678S12345678
Transmit DTMF signal	!	Used to transmit the DTMF signal.	 Select [New Recipients] on the [Fax/Internet Fax] screen to display the keyboard. Select [More Characters]. Select [!]. (Example) 0311123456!123#

When using the DTMF method, use specific symbols. For information on the DTMF method, refer to "Remote Folder (Using Remote Folder)" (P.215) and "Broadcast" (P.231).

Removing/Confirming a Recipient

You can remove or confirm recipients from the pop-up menu.

1 Select the recipient to be removed or confirmed from the selected recipients.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax	Recipient[]: Fa	ĸ		+ Add
Address Book New Recipients Redial List	. doo1	<fax 012<="" td=""><td>Address Remove Details Close Menu</td><td>×</td></fax>	Address Remove Details Close Menu	×
Darken L	Lighten 2 Sid Scar 1 Sided	ded nning		Resolution Standard (200x

2 Select any option from the pop-up menu.

■Remove

Removes the recipient.

Details

Displays the [Details] screen. You can confirm recipients or address numbers.

■Close Menu

Hides the pop-up menu.

[Details] Screen			
This screen allows you to confirm recipients.	1 Details: 1401		Close
	Speed Dial:	1401	
	Name: Fax Number:	012-345-6789-1401	
	Starting Rate G3 Auto		


■Starting Rate

Allows you to select a communication mode according to the features of a recipient's machine.

Lighten/Darken (Adjusting Fax Density)

You can select a fax density from seven levels.

1 Use $[\blacktriangleleft]$ and $[\blacktriangleright]$ to set the density level.

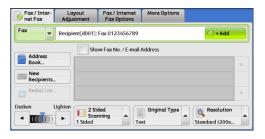

2 Sided Scanning (Transmitting 2-sided Originals)

You can scan a 1-sided or 2-sided document on one or both sides of paper for fax transmission.

- The image on the back side of a 2-sided document is rotated so that it is placed in the same orientation as the image on the front side.
- **1** Select a scan option.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax	Recipient[]: Fo	×		+ Add
Address Book New Recipients	2 Si 2 Si 3	ded ded (Head to Head ded (Head to Toe) re	ress	×
Darken L		ded nning X Te		Resolution Standard (200x

1 Sided

Select this option to scan one side of the document.

■2 Sided (Head to Head)

Select this option when both sides of the 2-sided document are in the same orientation.

■2 Sided (Head to Toe)

Select this option when both sides of the 2-sided document are in opposite orientations.

■More

Displays the [2 Sided Scanning] screen. Refer to "[2 Sided Scanning] Screen" (P.196).

[2 Sided Scanning] Screen

 Select whether the document is one-sided or two-sided. When [2 Sided] or [2 Sided (First Page 1 Sided)] is selected, also select the orientation of the document.

	Originals	
1 Sided	Head to Head	
2 Sided	Head to Toe	
2 Sided (First Page 1 Sided)		
)	

1 Sided

Select this option to scan one side of the document.

2 Sided

Select this option to scan both sides of the document.

■2 Sided (First Page 1 Sided)

Select this option to scan the front side of the first page and both sides of the remaining pages. Use this option when the back side of the first page is blank.

■2 Sided (Skip Blank Pages)

Select this option to scan only the document pages that are not blank. You do not need to take into account which side is the front when sending documents.

- Important If you select [2 Sided (Skip Blank Pages)] in [2 Sided Scanning] when the Skip Blank Pages feature is enabled, image loss may occur on the fax document depending on the recipient's machine. For example, when you select [2 Sided (Skip Blank Pages)] to send an A4 fax document, image loss may occur in the area where the edge erase amounts is set when the fax is printed on an A4 document by the recipient's machine.
- Note When [2 Sided (Skip Blank Pages)] is selected, the settings change as follows: [Original Type]: [Text] [Lighten/Darken]: [Normal] [Reduce/Enlarge]: [100%]
 - You can also switch whether to enable [2 Sided (Skip Blank Pages)] by pressing the <Energy Saver> button while setting the fax features.
 - The level of accuracy in which the machine determines whether a page is blank or not differs depending on the document. For example, if a blank page has background shadows, the machine may not determine the page as a blank page.
 - [2 Sided (Skip Blank Pages)] is displayed only when [Skip Blank Pages] is enabled. For more information, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Skip Blank Pages" in the Administrator Guide.

Originals

Select [Head to Head] when both sides of the documents are in the same orientation. Select [Head to Toe] when the front and back sides of the documents are in opposite orientations.

Original Type (Selecting the Document Type)

You can select the type of the original document, such as text and photo documents.

1 Select the document type.

	Layout ljustment	Fax / Internet Fax Options	More Options		
Fax 💌 Rec	ipient[]: Fa	×		1 + Add	
Address	She	ow Fax No. / E-mail	Address		
Book			Text		
Recipients			Photo & Text		
🕿 Redial List		6	Photo		v
Darken Lighte	_ <u> </u>	ded nning	Original Type	Resolution Standard (200x	

■Text

Select this option when transmitting a document that contains only text.

■Photo & Text

Select this option when transmitting a document that contains both text and photos. The machine automatically distinguishes the areas with text and those with photos and sets the appropriate image quality for each area of the document.

■Photo

Select this option when transmitting a document that contains only photos.

Note • If reduced in size, the scan documents may have stripes in the areas with photos.

Resolution (Specifying the Scanning Resolution)

You can set the resolution for the documents to be scanned.

- Note
 The machine scans a document at the specified resolution, but if the recipient's machine does not support the resolution, the machine automatically changes the resolution to one supported by the recipient's machine and there is a corresponding loss in quality.
 - The higher the resolution, the lower the transmission speed. Usually, we recommend that you select [Superfine (400 dpi)] or lower.
 - Only [Fine (200 dpi)] is available for the Server Fax service.

You can specify the resolution for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

1 Select the resolution.

💊 Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax	Recipient[]: Fa	×		+ Add
Address Book	She	ow Fax No. / E-mail.	Address	Standard (200x100dpi)
New Recipients.				
Redial List.				Superfine (400 dpi)
Darken	Lighten	ded nning	Original Type	Resolution X

Standard (200 x 100dpi)

Select this option when transmitting standard documents. (Approx. 200 x 100 pels/25.4 mm)

■Fine (200 dpi)

Select this option when transmitting documents with small text or detailed images. (Approx. 200 x 200 pels/25.4 mm)

■Superfine (400 dpi)

Select this option when transmitting documents with fine images. (400 x 400 pels/25.4 mm)

■Superfine (600 dpi)

Select this option when transmitting documents with extremely fine images. (600 x 600 pels/25.4 mm)

Layout Adjustment

This section describes the features you can select on the [Layout Adjustment] screen. The following shows the reference section for each feature.

2 Sided Scanning (Transmitting 2-sided Originals)	199
Original Size (Specifying the Scan Size for the Original)	199
Mixed Size Originals (Scanning Different Size Documents Simultaneously)	
Book Faxing (Scanning Facing Pages onto Separate Sheets)	
Reduce/Enlarge (Specifying a Scan Ratio)	
Stamp (Adding a Stamp when Scanning a Document)	

1 Select [Fax/Internet Fax] on the [Services Home] screen.



2 Select a feature on the [Layout Adjustment] screen.

2 Sided Scanning	Original Size	Mixed Size Originals
1 Sided	Auto Detect	Off
A B Book Faxing	Reduce / Enlarge	Stamp
off	Auto %	Off

2 Sided Scanning (Transmitting 2-sided Originals)

This feature is the same as [2 Sided Scanning] on the [Fax/Internet Fax] screen. For more information, refer to "2 Sided Scanning (Transmitting 2-sided Originals)" (P.195).

Original Size (Specifying the Scan Size for the Original)

You can specify the scan size for fax transmission.

Use this feature when a document is a non-standard size, or when you want to scan a document at a size different from the original size. You also can add margins, or delete unwanted margins.

You can change the default values for the buttons other than [Auto Detect] in System Administration mode. For information on how to change the default values, refer to "5 Tools" > "Fax Service Settings" > "Original Size Defaults" in the Administrator Guide.

1 Select [Original Size].

Fax / Inter-Layout net Fax Adjustment	Fax / Internet A Fax Options	Aore Options	nan de la companya de la calendar de
2 Sided Scanning 1 Sided	Original Size Auto Detect	Off	Mixed Size Originals
AB Book Faxing Off	Reduce / Enlarge Auto %	. Off	Stamp
]			

2 Select any option.

🗜 Original Size	e		💢 Cancel	🔶 Save
Auto Detect	A6 🗂	11 x 17° ≏		
A3 🗆	B4 ⊡	8.5 x 14" 🗅		
A4 🗆	B5 🗆	8.5 x 13" 🗆		
A4 🛙	8K 🗆	8.5 x 11" 🛙		
A5 🗂	16K 🗅	5×7" 🗅		

■Auto Detect

Detects the document size automatically.

	Document feeder	Document glass
Auto-detectable Document Sizes	B5, B5ᠿ, B4, A5, A5ᠿ, A4, A4ᠿ, A3, 8.5 x 11", 8.5 x 11"ᠿ, 11 x 17", 16Kᠿ, 8K	B6, B5, B5입, B4, A6, A5, A5입, A4, A4입, A3, 8.5 x 11"입, 11 x 17", 16K, 16K입, 8K

Note • If the document size cannot be detected automatically, a screen to enter the document size appears.

The document sizes that can be automatically detected depend on the [Paper Size Settings] made in System Administration mode. For information on [Paper Size Settings], refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

Standard Size

Select the original size from preset sizes.

You can change the sizes displayed on the screen. For more information, refer to "5 Tools" > "Fax Service Settings" > "Original Size Defaults" in the Administrator Guide.

Mixed Size Originals (Scanning Different Size Documents Simultaneously)

You can scan documents of various sizes simultaneously and send faxes of the corresponding sizes or of one selected size. To use this feature, load the documents in the document feeder.

Important • Load documents in landscape orientation. However, always load A5 and B5 documents in portrait orientation so that the machine can detect the size of the documents automatically.

- When loading documents, align the top left corners of the documents properly. Otherwise, a paper jam may occur.
- The recommended document size combinations are A4 portrait and A3 landscape, or B5 portrait and B4 landscape. If another combination of document sizes is used, the documents can be fed at an angle and may not be scanned properly.
- Be sure to set [Original Size] to [Auto Detect] on the [Layout Adjustment] screen, when using the Mixed Size Originals feature.
- **1** Select [Original Size].

1 Sided Auto Detect	Off
Book Faxing Reduce / Enlar	je Stamp
Off Auto %	Off

2 Confirm that [Auto Detect] is selected, and select [Save]. If [Auto Detect] is not selected, select [Auto Detect] and then [Save].

🗜 Original Size)		💥 Cancel	🔗 Save
Auto Detect	A6 🗅	11 x 17" 🗆		
A3 🗆	B4 ⊂	8.5 x 14" 🗇		
A4 🗆	B5 🗆	8.5 x 13" 🖾		
A4 🛙	8K 🗆	8.5 x 11" 🛙		
A5 🗆	16К 🛙	5 x 7" 🗅		

3 Select [Mixed Size Originals].

Z Sided Scanning	Original Size	Mixed Size Originals
Sided	Auto Detect	Off
A B Book Faxing	Reduce / Enlarge	Stamp
Off	Auto %	Off

Select [On].

 Image: Select [On].
 Image: Se

■Off

4

Select this option when all documents are of the same size.

∎On

When scanning documents of different sizes, the machine automatically detects the size of each document.


Book Faxing (Scanning Facing Pages onto Separate Sheets)

You can scan the left and right pages of a bound document separately to fax them. This feature is useful if you want to separately scan facing pages of a bound document.

- Note You cannot use the document feeder with this feature.
 - Non-standard size documents and undetectable size documents may not be separated into two accurately.
- **1** Select [Book Faxing].

Fax / Inter- Layout Adjustment		fore Options	เขาะที่มีกลางที่แก่ได้ไปกับได้มีกลางที่มากกับได้ไปกับได้เห็นการการการที่ได้ได้ -
2 Sided Scanning 1 Sided	Original Size Auto Detect	off	Mixed Size Originals
Book Faxing Off	Reduce / Enlarge Auto %	· Off	Stamp
·)

2 Select any option.

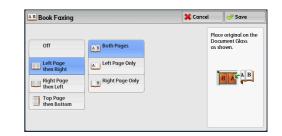

■Off

Does not scan as a bound document.

■Left Page then Right

Scans the left page and then the right page of facing pages.

■Right Page then Left

Scans the right page and then the left page of facing pages.

■Top Page then Bottom

Scans the top page and then the bottom page of facing pages.

■Both Pages

Scans both pages in page order.

■Left Page Only

Scans the left page only. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Right Page Only

Scans the right page only. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Top Page Only

Scans the top page only. You can select this option when [Top Page then Bottom] is selected.

Bottom Page Only

Scans the bottom page only. You can select this option when [Top Page then Bottom] is selected.

Reduce/Enlarge (Specifying a Scan Ratio)

This feature enlarges or reduces scanned images with a specified ratio. Important • Some destination machines may not be able to receive faxes at the specified ratio.

1 Select [Reduce/Enlarge].

S	Original Size	Mixed Size Originals
	uto Detect	Off
AB Book Faxing Off	Reduce / Enlarge	Stamp Off

- **2** Select a preset ratio, or specify a value.
 - Note If a magnification is specified in [Reduce/ Enlarge], [Rotate 90 degrees] does not function.

Reduce / Enlarge		💢 Cancel	🔗 Save
Variable %	Preset %		
50 ↔ 400	+ 100%	86% A3 A4→B5	
Auto	_ Auto %	115% E B5→A4	
	50% A3→A5, B4→B6	122% / A5→B5	
	70% A3→A4, B4→B5	141% / B5→B4	
	81% B4→A4, B5→A5	200% / B6→B4	

■Variable %

Specify a ratio in the range from 50 to 400% in 1% increments. To specify a value, use the numeric keypad or [+] and [-].

■Preset %

• 100%

Scans at the same size as the original.

• Auto %

If the scan width of the document exceeds the maximum image size, the scanned image is rotated or reduced to fit the maximum size.

When speed dialing is used, the maximum image size will be the size registered in the address number. When speed dialing is not used, the maximum size will be A3.

- You can specify whether to rotate documents in System Administration mode. For more information, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Rotate 90 degrees" in the Administrator Guide.
- Preset ratios

Select from preset scan ratios.

You can change the default values of scan ratios other than [100%] and [Auto %]. For more information, refer to "5 Tools" > "Fax Service Settings" > "Reduce/Enlarge Presets" in the Administrator Guide.

Stamp (Adding a Stamp when Scanning a Document)

This feature stamps a circle mark at the bottom corner of each document page when it is fed through the document feeder. This helps you easily check if each page of the documents has been scanned correctly.

Important • Stamps cannot be affixed on the following documents:

- Documents loaded on the document glass
- Documents suspended by pressing the <Stop> button
- Documents suspended by paper jams
- 1-sided documents longer than 600 mm
- 2-sided documents longer than 431.8 mm
- Documents not fed into the document feeder.
- · Documents suspended due to memory overflow
- · Documents that were being scanned when an immediate transmission was suspended

Note

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

1 Select [Stamp].

2 Sided Scanning	Original Size	Mixed Size Originals
l Sided	Auto Detect	Off
A B Book Faxing	Reduce / Enlarge	Stamp
Off	Auto %	Off

2 Select [On].

. Stamp		💢 Cancel	🤣 Save
Off On	no more than one sheet i	re impressed at the bottom edg	

■Off

No stamp is affixed.


∎On

A stamp is affixed.

Fax/Internet Fax Options

This section describes the features you can select on the [Fax/Internet screen. The following shows the reference section for each feature.	Fax Options]
Acknowledgement Report (Confirming Transmission Results)	
Starting Rate (Selecting a Communication Mode)	
Priority Send/Delay Start (Specifying Send Priority/Send Time)	
Transmission Header Text (Adding Sender Name and Phone Number to Faxes)	
Cover Page (Transmitting Documents With a Cover Page)	
Internet Fax Subject (Specifying the Internet Fax Subject)	
Internet Fax Message (Editing the Internet Fax Mail Contents)	
Recipient Print Sets (Printing Multiple Sets at the Remote Machine)	
Pages per Side (Combining Multiple Pages into One Sheet)	
Remote Folder (Using Remote Folder)	
F Code (Using F Code Transmission)	
Internet Fax Profile (Specifying Internet Fax Profiles)	
Encryption (Sending an Internet Fax Encrypted by S/MIME)	
Digital Signature (Sending an Internet Fax with a Digital Signature by S/MIME)	

- **1** Select [Fax/Internet Fax] on the [Services Home] screen.
- Language \mathbf{O} Screen Brightness Сору Fax / Internet Fax E-mail Setup 6 1/2 Scan to PC Simple Co Simple Fa: Activity Report . **)** Fax Receiving Mode nd from Fo Print Mode
- **2** Select a feature on the [Fax/Internet Fax Options] screen.
 - Note Only [Delay Start] is available for the Server Fax service.

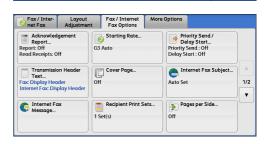

Acknowledgement Report (Confirming Transmission Results)

You can check Fax and Internet Fax transmission results.

To receive fax transmission results, select [On] in [Confirmation Options] on the [Acknowledgement Report] screen. By enabling this feature, the machine automatically prints a Transmission Report when fax transmissions complete successfully, and prints a Transmission Report - Job Undelivered when fax transmissions end unsuccessfully.

To confirm Internet Fax transmission results, the following two types are available: [Read Receipts] and [Delivery Receipts].

Selecting [Delivery Receipts] allows you to check whether or not the Internet Fax you sent was delivered successfully to the recipient's folder.

Selecting [Read Receipts] allows you to check whether or not the Internet Fax you sent was correctly delivered and the attached files were correctly processed.

• The optional component is required to use the Read Receipts and Delivery Receipts features. For information, contact our Customer Support Center.


Fax

4

- Read Receipts (MDN) and Delivery Receipts (DSN) are available when the recipient's machine supports MDN and DSN, respectively.
- You can select either [Read Receipts] or [Delivery Receipts] in the System Administration mode. For more information, refer to "5 Tools" > "Fax Service Settings" > "Internet Fax Control" > "Delivery Confirmation Method" in the Administrator Guide.
- You can only use the Delivery Receipts (DSN) feature to check the delivery of e-mail to servers that support this feature. Furthermore, if any of the e-mail servers on the transmission route do not support DSN, you cannot verify the delivery of the e-mail, even if the e-mail has been delivered successfully. For this reason, the result of the Delivery Receipts may differ from the actual delivery status.
- If [Confirmation Options] is set to [On] and the transmission completes unsuccessfully, a Transmission Report Job Undelivered will be printed.

The following procedure uses the Read Receipts feature as an example. The procedure is the same for the Delivery Receipts feature.

1 Select [Acknowledgement Report].

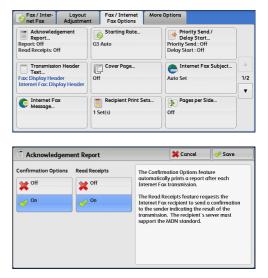

2 Select any option.

■Confirmation Options

• Off

No Transmission Report is printed.

• On

A Transmission Report is automatically printed when the transmission completes successfully. If the transmission does not end successfully, a Transmission Report - Job Undelivered is printed.

■Read Receipts

• Off

Disables the Read Receipts feature.

• On

Enables the Read Receipts feature. You can check whether the Internet Fax you sent was correctly delivered and the attached files were correctly processed.

Delivery Receipts

• Off

Disables the Delivery Receipts feature.

On

Enables the Delivery Receipts feature. You can check whether the Internet Fax you sent was correctly delivered to the destination folder.

Starting Rate (Selecting a Communication Mode)

You can select a communication mode based on the features of the remote machine.

G3 is the international standard for fax transmissions established by the ITU-T.


When you use speed dialing, one touch buttons, group dial number or the address book to specify a recipient registered in an address number, the communication mode currently set to the address number is set and cannot be changed. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

You can change the default mode of [Starting Rate] in System Administration mode. For information on how to change the default mode, refer to "5 Tools" > "Fax Service Settings" > "Fax Defaults" > "Starting Rate" in the Administrator Guide.

Note • [G4 Auto] is displayed when the Internet Fax Kit (optional) is installed.

1 Select [Starting Rate].

Select any option.

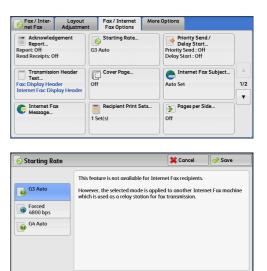

■G3 Auto

2

Select this mode if the remote machine is G3 compatible. This mode is normally selected.

Depending on the reception capabilities of the remote machine, the machine automatically switches modes in the following order: G3 Unique ECM \rightarrow G3 Unique \rightarrow ITU-T G3 ECM \rightarrow ITU-T G3.

■Forced 4800 bps

Select this mode when transmitting over noisy or poor telephone lines, as can be the case with overseas calls.

Also select this mode when transmitting over noisy or poor telephone lines domestically.

■G4 Auto

[G4 Auto] is displayed when the Internet Fax Kit (optional) is installed. This setting is applied to the transmission speed between the fax gateway and destination fax for the Internet Fax.

About Forced 4800 bps

You can communicate with faxes overseas via telephone company exchanges, etc.

Note
 International telephone networks are originally designed for voice communications. Noise that does not really affect voice communications causes a problem with fax communications. It may result in the deterioration of images quality, the inability to transmit a fax, or even terminate the transmission. Regardless of whether transmission is successful, you are charged for the call once the line is connected. For information on line trouble and call charges, contact your telephone company.

Fax A

2

[Save].

• If you select [Forced 4800 bps], the transmission time may be longer because transmission is performed at 4800 bps or less to ensure transmission is successful.

1 Select [Starting Rate].

Fax / Inter- net Fax	Layout Adjustment		ore Options		
Acknowled Report Report: Off Read Receipts: O	-	Starting Rate G3 Auto			
Transmissio Text Fox: Display Hea		Cover Page	Auto Set	ernet Fax Subject	1/2
Internet Fax: Dis	play Header	Recipient Print Sets	Pag Off	es per Side	•
Starting Ro		feature is not available for In	Car	<u>)(</u> *	
Starting Ra G3 Auto G3 Auto Forced 4800 bps	Thist	feature is not available for In ever, the selected mode is a h is used as a relay station fo	nternet Fax rea	ipients. er Internet Fax mach	ine

3 Enter the recipient fax number in the same manner as when you make an international call.

The following is an example:

Select [Forced 4800 bps], and then select

Telephone	0 0 1 1	Country	Area code	Fax number of the
company ID		code		other party

Important • In some areas, you may need to enter a pause after the telephone company ID number.

• For information on the telephone company ID number, contact your telephone company.

Priority Send/Delay Start (Specifying Send Priority/Send Time)

The Priority Send feature allows you to give priority to a fax or polling job over other jobs. The Delay Start feature allows you to specify when your fax is sent. This feature is useful for sending faxes when communication charges are low, such as during night time.

Note

- [Priority Send/Delay Start] is not available for Internet Fax.
 The Priority Send feature is not available for Server Fax.
- For Server Fax, [Delay Start] is available when the FTP or SMB protocol is used, but not when the SMTP protocol is used.
- When [Delay Start] is set for Server Fax, this setting applies to transmission from the Server Fax server to a final destination, but not from the machine to the Server Fax server.
- [Priority Send] can be set in combination with [Delay Start]. If both features are set, Priority Send is performed at the time specified in [Delay Start].
- **1** Select [Priority Send/Delay Start].

Fax / Inter- Layout Adjustmer		re Options	15505
Acknowledgement Report Report: Off Read Receipts: Off	G3 Auto	Priority Send / Delay Start Priority Send : Off Delay Start : Off	
Transmission Header Text Fox: Display Header Internet Fox: Display Header	Cover Page Off	Auto Set	2
Finternet Fax Message	Recipient Print Sets 1 Set(s)	Pages per Side Off	

2 Select any option.

■Priority Send

• Off

Priority Send is not applied.

• On

Priority Send is applied.

- If the Priority Send feature is selected during transmission, the fax will be sent after the current transmission ends.
 - In redial mode, the fax will be resent preferentially after the specified redial interval.
 - The Priority Send feature cannot be set separately for each recipient of Broadcast and multipolling jobs.

You can give priority to a pending job. For more information, refer to "Job Status" (P.367).

■Delay Start

• Off

Delay Start is not applied.

· Specific Time

Delay Start is applied.

Note

• You can specify a time within 24 hours in 1 minute increments. You cannot specify a date.

- You can set [Delay Start] independently for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.
- If you use address numbers or group dial numbers to specify recipients for the Broadcast Send feature, the [Delay Start] setting specified for each address number is invalid.
- If the fax cannot be sent at the specified time because, for example, the telephone line is busy, it will be sent as soon as the line becomes available.

■Specific Time

Displays the [Delay Start - Specific Time] screen. Refer to "[Delay Start - Specific Time] Screen" (P.209).

[Delay Start - Specific Time] Screen

Note

This screen allows you to specify the start time for fax transmission.

- You can change the default value of [Specific Time] in System Administration mode. For more information, refer to "5 Tools" > "Fax Service Settings" > "Fax Defaults" > "Delay Start - Specific Time" in the Administrator Guide.
- **1** Select [AM] or [PM].



2 Set [Hours] and [Minutes].

Important • If you press the <Start> button after the specified time, the stored document will be sent at the specified time on the following day.

Transmission Header Text (Adding Sender Name and Phone Number to Faxes)

The Transmission Header Text feature adds the start time, sender name, recipient name, G3 ID, and number of pages onto the transmitted document.

This feature enables the recipient to confirm when and from whom the fax was sent.

Important • Header information is printed at the top of the document, so an area of about 3 to 5 mm may not be printed at the top of each page at the remote machine.

Note

- If the document is resent, "Resend" is printed at the left of the date and time indication.
 - If this feature is enabled for Broadcast Send, header information is attached to faxes for all the recipients.
 - The start time is printed in the format set on the machine (12 or 24 hour clock). For information on how to set the time, refer to "5 Tools" > "Common Service Settings" > "Machine Clock/Timers" in the Administrator Guide.
 - The recipient name is only added if it has been registered in the address number.
 - If you specify the line to send a fax, the sender name registered for the selected line is printed. If you do not specify a line, the sender name (company logo) of the machine is printed, but not the sender name of the line.

For information on the sender name and G3 ID, refer to "5 Tools" > "Fax Service Settings" > "Local Terminal Information" in the Administrator Guide.

You can change the default value of [Transmission Header Text] in System Administration mode. For information on how to change the default value, refer to "5 Tools" > "Fax Service Settings" > "Fax Defaults" > "Transmission Header Text" in the Administrator Guide.

1 Select [Transmission Header Text].

Select [Display Header].

 Internet Fax
 Loguout Fax/Internet Fax Options

 Achaveladgement Adjustment
 Fax/Internet Fax Options

 Achaveladgement Report...
 Starting Rate...

 Report...
 G3 Auto

 Priority Send / Delay Start...
 Priority Send / Delay Start...

 Priority Send: Off
 G3 Auto

 Image: Cover Page...
 Image: Cover Page...

 Image: Transmission Header
 Off

 Image: Transmission Header
 Image: Transmission Header

 Image: Transmission Header
 Image: Transmission Heade

Transmission H		💢 Cancel	🖉 🔗 Save	
Fax Off Off Display Header	Internet Fax	transmission	udds information s and sender's name ed documents.	

■Off

2

No header information is attached.

Display Header

Header information is attached.


Cover Page (Transmitting Documents With a Cover Page)

This feature allows you to attach a cover page to the document.

The cover page includes the recipient name, comment, sender name, machine fax number, number of pages, and date and time of transmission.

You can specify whether to attach a cover page for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

- Note This feature is not available for the Server Fax service.
 - When [Transmission Header Text] is set, the header information is not printed on the cover page.
 - You cannot use the Cover Page feature for Broadcast transmission using the numeric keypad. To use this feature for Broadcast transmission, register recipients to address numbers.
 - The size and resolution of the cover page is based on the first page of the document.
- **1** Select [Cover Page].

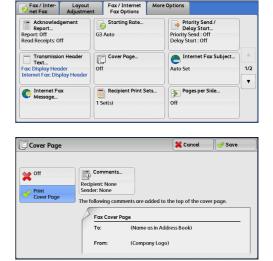

■Off

2

No cover page is attached.

Select [Print Cover Page].

Print Cover Page

A cover page is attached.

■Comments

Displays the [Cover Page - Comments] screen. Refer to "[Cover Page - Comments] Screen" (P.211).

[Cover Page - Comments] Screen

This screen allows you to select comments to be added to the recipient and sender fields.

1 Select any option.

		💢 Cancel	🧇 Save	
	Sender's	Comment		
	None			
	1. Commen	t 1		
	2. Commen	t 2		
	3. Commen	t 3		
	4. Commen	t4		
•	5. Commen	t 5		¥
		None None C. Commen C. Com	Sender's Comment Sender's Comment None C. Comment 1 C. Comment 2 C. Comment 3 C. Comment 4	Sender's Comment Sender's Comment None Comment 1 Comment 2 Comment 3 Comment 4

Recipient's Comment

Displays the registered comments in the recipient field. Select a comment to be used. Select [None] when no comments need to be added to this field.

Sender's Comment

Displays the registered comments in the sender field. Select a comment to be used. Select [None] when no comments need to be added to this field.

For information on how to register comments, refer to "5 Tools" > "Setup" > "Add Fax Comment" in the Administrator Guide.

About the Cover Page

∎To

When an address number is used, the recipient name registered for the address number is printed. This field is blank if no recipient name is registered for the address number.

Recipient's Comment

Prints the comment selected in [Recipient's Comment].

■From

Prints the registered sender name.

Sender's Comment

Prints the comment selected in [Sender's Comment].

Fax Number

Prints the fax number of the machine. For G3 communications, "G3 ID" is printed.

■Number of Pages

Prints the number of pages.

Send Date and Time

Prints the transmission date and time.

Remarks

Prints remarks when the document is sent using Broadcast, Folder, Relay Broadcast, or Redial Mode.

Internet Fax Subject (Specifying the Internet Fax Subject)

You can specify an Internet Fax subject. If no subject is specified, the preset subject is automatically entered.

- This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Internet Fax Subject].



Fax

2 Select [Keyboard].

Internet Fax Subject	🗱 Cancel	🖉 🛷 Save
uto Set		Delete
	[Keyboard

3 Enter a subject with up to 128 characters using the displayed keyboard.

For information on how to enter characters, refer to "Entering Text" (P.68).

Note • If no subject is entered, the following will be automatically entered as a subject: [InternetFAX;<From> ; <Send Date and Time>].

Internet Fax Message (Editing the Internet Fax Mail Contents)

You can edit Internet Fax comments. Enter text using the keyboard or use a preregistered comment.

Note • This feature may not be available for some models. The optional component is required. For more information, contact our Customer Support Center.

For information on how to register comments, refer to "5 Tools" > "Setup" > "Add Fax Comment" in the Administrator Guide.

1 Select [Internet Fax Message].

Fax / Inter- Layout Adjustmer		e Options	
Acknowledgement Report Report: Off Read Receipts: Off	G3 Auto	Priority Send / Delay Start Priority Send : Off Delay Start : Off	
Transmission Header Text Fox: Display Header Internet Fox: Display Header	Cover Page Off	Internet Fax Subject Auto Set	1/2
F Internet Fax Message	Recipient Print Sets 1 Set(s)	Pages per Side Off	•

2 Select any option.

C Message Cancel Save

■Delete Text

Deletes the comment displayed on the screen.

■Keyboard

Allows you to enter body text using the displayed keyboard. Up to 256 characters can be entered.

You can also select [Add Comment] to select a registered comment and edit it. For information on how to enter characters, refer to "Entering Text" (P.68).

Add Comment

Allows you to insert a registered comment. Select this button to display the [Add Comment] screen.

Refer to "[Add Comment] Screen" (P.214).

[Add Comment] Screen

This screen allows you to select a comment to be added.

1 Select any option.

뎢 Add Comment	💢 Cancel	🔗 Save
Select Comment		
1. Comment 1		
2. Comment 2		
3. Comment 3		
4. Comment 4		
5. Comment 5		
6. Comment 6		

Select Comment

Displays the registered comments.

For information on how to register comments, refer to "5 Tools" > "Setup" > "Add Fax Comment" in the Administrator Guide.

Recipient Print Sets (Printing Multiple Sets at the Remote Machine)

This feature allows you to print multiple sets of a fax document at the remote machine.Note • This feature is not available for the Server Fax service.

1 Select [Recipient Print Sets].

Select any option.



Recipient Print Sets	💥 Cancel	🖉 🎺 Sav
1 Set 2 Multiple Sets -		

■1 Set

2

The remote machine will output one set of the fax document.

Multiple Sets

Allows you to specify the number of print sets the remote machine will output, in the range from 2 to 99 in 1 set increments.

Use [+] and [-] or the numeric keypad to specify the value.


Pages per Side (Combining Multiple Pages into One Sheet)

This feature allows you to send a fax by combining multiple pages of a document into one side of a single sheet of paper. For example, if you have a document of 12 pages, and you specify 3, the machine combines the scan data into 4 pages. You can specify a value for [Pages per Side] in the range from 2 to 9.

Important • If the length of each resultant page is too long, the output data may be split on the recipient's machine.

- If the number of pages of documents is smaller than the specified pages, the scanned number of pages will only be combined and transmitted.
- This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Pages per Side].

Note

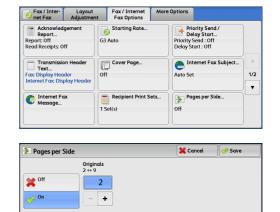

∎Off

2 Select [On].

The Pages per Side feature is not applied.

∎On

Allows you to scan multiple pages of a document onto one side of a single sheet of paper for fax transmission. Specify the number of pages in [Originals] to fit onto one side of a sheet of paper.

Use [+] and [-] or the numeric keypad to specify the value.

Remote Folder (Using Remote Folder)

This feature allows you to send or receive confidential documents that you do not want others to see.

- Note
- This feature is not available for the Server Fax service.
 - The fax signal method and F code method are available in IP Fax (SIP). For the method to use a remote folder using the F code method, refer to "F Code (Using F Code Transmission)" (P.218).
 - For IP Fax (SIP) using a VoIP Gateway, a remote folder using the Fax signal method is not available. Only the F code method is available.

Sending to Folder (Fax Signal Method)

This feature allows you to send a file directly to a folder on the remote machine. The file can be printed on the remote machine. To use this feature, you need the folder number and passcode of the remote folder.

Secure Polling (Fax Signal Method)

This feature allows you to retrieve a file from a folder on a remote machine by sending a polling request from your machine. To use this feature, you need the folder number and passcode of the remote folder.

The retrieved file is stored in a folder on the machine. When a file is received in a folder, the <Data> indicator lights up and a Folder Report is printed. The Folder Report lists the folder number and name.

Important • You cannot use polling to retrieve files from multiple remote folders simultaneously.

Note • The DTMF method is available for Remote Folder. The supported signals are numerals, "*", and "#" only.

For information on how to print files received in a folder, refer to "Printing Files in a Folder" (P.328).

Files received in folders can be automatically printed depending on the folder settings. For information on the folder settings, refer to "Configuring/Starting Job Flow" (P.331).

Depending on the report print settings, a Folder Report may not be printed even after a file is received in a folder. For information on the Folder Report setting, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Folder Report" in the Administrator Guide.

Sending to Folder (DTMF Method)

To send a fax to a folder using the DTMF method, you need the folder number of the remote folder. Two DTMF methods are available: Auto and Manual.

Sending to Folder (Fax Signal Method)

Select [On].

1 Select [Remote Folder].

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Fol Off	lder Of		TIFF-S	et Fax Profile
) [
				2/2
😞 Remote Fo	lder		💢 Canc	el 🛛 🖉 Save
Remote Fol	Remote F	older Number 001, 010, 100)	🗱 Cane	sl 🛛 🖉 🛷 Save

■Off

2

Disables the Remote Folder feature.

∎On

Enables the Remote Folder feature. Enter a folder number in [Remote Folder Number].

Remote Folder Number

Select the [Remote Folder Number] box, and enter the 3-digit folder number of the remote machine using the numeric keypad.

Folder Passcode

Select the [Folder Passcode] box, and enter the 4-digit passcode of the remote folder using the numeric keypad. If a passcode is not set, leave this box blank.

Secure Polling (Fax Signal Method)

1 Select the [More Options] tab to display the [More Options] screen.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Pol Off		Store for Polli Off	1g	On-hook (Manual Send/Receive
] (]	

- **2** Select [Remote Polling].
- **3** Select [Poll a Remote Device].

Remote Polling		💢 Cancel	🎺 Save
Off Poll a Remote Device	To retrieve files from a fol Device" on this screen and Remote Folder feature.	retrieve files from a remote r der of a remote device, selec I specify the remote folder nu e for Internet Fax recipients.	t "Poll a Remote

- 4 Select [Save].
- 5 Select the [Fax/Internet Fax Options] tab to display the [Fax/Internet Fax Options] screen, and select [▼] to display the next page.
- Fax / Internet Fax Options Fax / Inter-Layout Priority Send. Delay Start... Priority Send : Off Delay Start : Off Start G3 Auto Report. Read Re eipts: Off Cover Page. Transm Text... ax Subject. e 1/2 Sol isplay Header et Fax: Display v Pages per Side. Reci 1 Set(s) C Internet Fax nt Print S

6 Select [Remote Folder].

Fax / Inter-	Layout Adjustment	Fax / Internet Fax Options	More Options		
Off		F Code	TIFF-S	ternet Fax Profile	2/2

7 Select [On].

😓 Remote Fol	der	💢 Cancel	🔗 Save
¥ ^{Off} ∕∕ ^{On}	Remote Folder Number (Example: 001, 010, 100)		
	Folder Passcode		

■Off

Disables the Secure Polling feature.

∎On

Enables the Secure Polling feature. Enter a folder number in [Remote Folder Number].

Remote Folder Number

Select the [Remote Folder Number] box, and enter the 3-digit folder number of the remote machine using the numeric keypad.

Folder Passcode

Select the [Folder Passcode] box, and enter the 4-digit passcode of the remote folder using the numeric keypad. If a passcode is not set, leave this box blank.


Format for Auto Send (DTMF Method)

1 Select [New Recipients] on the [Fax/Internet] screen to display the keyboard on the touch screen, and enter the destination and passcode in the following format.

Telephone number ! * \$	Folder number	##\	Passcode of folder on	\##\$
remote machine	remote machine		remote machine	

Format for Manual Send (DTMF Method)

1 Select [On-hook (Manual Send/Receive)] on the [More Options] screen to display the keyboard on the touch screen, and enter the destination and passcode in the following format.



Note

- Use the keyboard on the touch screen to enter symbols such as "!" and "*". For information on how to enter characters, refer to "Entering Text" (P.68).
 - Enter a passcode only if necessary.
 - You can specify any machine that supports our DTMF method feature.

By registering destinations in address numbers using the above dialing formats, you can use the address numbers for the Secure Polling feature. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

F Code (Using F Code Transmission)

F Code is the transmission procedure set by the Communications and Information Network Association of Japan and is the T.30 (communication protocol) method for using sub-addresses that was standardized by the ITU-T. The F Code feature enables various features to be used with transmission among F Code-compatible machines regardless of their manufacturers.

When using F Code transmission, use an F Code and password. The F Code, which is also called a sub-address by other companies, must be registered (entered). Set a password if necessary.

- This feature is not available for the Server Fax service except when an F code is included in the dialing number.
 - To use the F Code feature, you need to confirm the F Code of the recipient's machine in advance.
 - If you perform Sending to Folder or Secure Polling between machines of this model, we recommend that you use the fax signal method.

You can set the F Code and password for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

You can use the Relay Broadcast and Remote Relay Broadcast features with F Code transmission. For information on Relay Broadcast and Remote Relay Broadcast, refer to "Relay Broadcast (Transmitting Documents Through a Relay Station)" (P.232) and "Remote Relay Broadcast (Performing Relay Broadcast to Remote Locations)" (P.235), respectively.

You can use the following features with F Code transmission.

Sending to Folder (F Code Method)

When a folder is set on a remote machine, you can send a document directly to the folder by specifying the F code (sub-address) and password (if set up) of the folder.

Obtain the F code (sub-address) and password of the remote folder in advance.

Example of specifying a destination:

F Code (sub-address):	0 (to designate an F Code transmission) and the folder number of a folder on the remote machine
Password (if set up):	The password of the remote folder

Secure Polling (F Code Method)

When a folder is set on a remote machine, you can perform secure polling for the folder by specifying its F code (sub-address) and password (if set up).

If you use your machine to perform secure polling for a folder on a remote machine, obtain the F code (sub-address) and password of the target folder.

If you use a remote machine to perform secure polling for a folder on your machine, give the following information.

F Code (sub-address):	0 (to designate an F Code transmission) and the folder number of the target folder
Password (if necessary):	The password of the target folder
• The DTMF method is av and "#" only.	ailable for Remote Folder. The supported signals are numerals, "*",

Files received in folders can be automatically printed depending on the folder settings. For information on the folder settings, refer to "Configuring/Starting Job Flow" (P.331).

Depending on the report print settings, a Folder Report may not be printed even after a file is received in a folder. For information on the Folder Report setting, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Folder Report" in the Administrator Guide.

For information on how to print files received in a folder, refer to "Printing Files in a Folder" (P.328).

Sending to Folder (F Code Method)

1 Select [F Code].

Select [On].

2

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Fo Off	Ider		TIFF-S	et Fax Profile
				_
				2/2
				¥
F Code			🗱 Cance	l 🧳 Save
	F Code			
X Off				
🧼 On	Password			
				Keyboard

3 Select the [F Code] box, and enter the F code using the displayed keyboard or the numeric keypad.

Note • You can enter up to 20 digits for the F code.

4 If necessary, select the [Password] box, and enter the password using the displayed keyboard or the numeric keypad.

• You can enter up to 20 digits for the password.

■Off

F code transmission is not used.

∎On

F code transmission is used. Enter the F Code.

■F Code

Select the [F Code] box, and enter the F code using the displayed keyboard or the numeric keypad.

• You can enter up to 20 digits for the F Code.

Password

Select the [Password] box, and enter the password using the displayed keyboard or the numeric keypad. If a password is not set, leave this box blank.

Note • You can enter up to 20 digits for the password.

■Keyboard

Enter the F code or the password using the displayed keyboard. For information on how to enter characters, refer to "Entering Text" (P.68).

5 Specify a destination, and then press the <Start> button.

Secure Polling (F Code Method)

1 Select the [More Options] tab to display the [More Options] screen.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Pol Off	ling	Store for Polli Off	ng	On-hook (Manual Send/Receive)

- **2** Select [Remote Polling].
- **3** Select [Poll a Remote Device].

둲 Remote Polling		💢 Cancel	🔗 Save
Poll a Remote Device	This feature allows you to ro To retrieve files from a fold Device on this screen and s Remote Folder feature. This feature is unavailable f	er of a remote device, select pecify the remote folder nu	"Poll a Remote

4 Select [Save].

5 Select the [Fax/Internet Fax Options] tab to display the [Fax/Internet Fax Options] screen.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Fol		F Code	TIFF.S	c Profile ▲ 2/2 ▼

e Option

TIFF-S

💥 Cancel

Save

Keyboard...

Internet Fax Profile.

▲ 2/2

Fax / Interr

F Code.

off

F Code

Fax / Inter

F Code

X Off

🥜 On

8

6 Select [F Code].

7 Select [On].

8 Select the [F Code] box, and enter the F Code using the displayed keyboard or the numeric keypad.

Note • You can enter up to 20 digits for the F Code.

9 If necessary, select the [Password] box, and enter the password using the displayed keyboard or the numeric keypad.

Note • You can enter up to 20 digits for the password.

■Off

Disables the Secure Polling feature.

∎On

Enables the Secure Polling feature.

■F Code

Select the [F Code] box, and enter the F code using the displayed keyboard or the numeric keypad.

• You can enter up to 20 digits for the F Code.

Password

Select the [Password] box, and enter the password using the numeric keypad. If a password is not set, leave this box blank.

Note • You can enter up to 20 digits for the password.

■Keyboard

Enter the F code or the password using the displayed keyboard. For information on how to enter characters, refer to "Entering Text" (P.68).

10 Specify a destination, and then press the <Start> button.

Internet Fax Profile (Specifying Internet Fax Profiles)

A profile is specified to restrict attribute information such as image resolution and paper size for transmissions between Internet Fax-compatible machines.

- Note
- The profiles that can be processed differ depending on the Internet Fax-compatible machine
 of the recipient. Before specifying a profile, confirm the profiles the Internet Fax-compatible
 machine of the recipient can process.
 - If inconsistency occurs between a profile, and stored document size and resolution, priority is given to the settings specified in the profile.
 - If the profile differs for each recipient when using Broadcast Send, the smallest size becomes the maximum image size.
 - This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

You can set an Internet Fax profile for each address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

You can change the default value of [Internet Fax Profile] in System Administration mode. For information on how to change the default value, refer to "5 Tools" > "Fax Service Settings" > "Fax Defaults" > "Internet Fax Profile" in the Administrator Guide.

1 Select [Internet Fax Profile].

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		
Off	ider Off		TIFF-S	ernet Fax Profile	2/2 ▼

2 Select any option.

🧓 Internet Fo	ıx Profile	💢 Cancel	🔗 Save
TIFF-S TIFF-F TIFF-J	Standard (200 x 100 dpi) than 8.5 x 11" or A4 will be	g 8.5 x 11" or A4 original size or Fine (200 dpi) Resolution. e automatically reduced. Id larger originals up to 11 x	Original larger

■TIFF-S

This profile is the Internet Fax standard. For documents that are larger than A4, the size is reduced automatically to A4 for transmission.

- Encoding method : MH
- Stored document size : A4
- Resolution
 Standard (200 x 100 dpi), Fine (200 dpi)
- [TIFF-S] is not available when [Superfine (400 dpi)] or [Superfine (600 dpi)] is selected in [Resolution] on the [Fax/Internet Fax] screen.

■TIFF-F

Select this profile when you specify super-fine for the resolution or when you send A3 or B4 documents.

- Encoding method : MMR
- Stored document size : A4, B4, A3
- Resolution
 Standard (200 x 100 dpi), Fine (200 dpi), Superfine (400 dpi), Superfine (600 dpi)
- When a fax is sent to a machine that does not support TIFF-F, the recipient's machine will not be able to display or print the images.

■TIFF-J

Select this profile for sending documents in JBIG.

- Encoding method : JBIG
- Stored document size : A4, B4, A3
- Resolution
 Standard (200 x 100 dpi), Fine (200 dpi), Superfine (400 dpi), Superfine (600 dpi)

 When a fax is sent to a machine that does not support TIFF-J, the recipient's machine will not be able to display or print the images.

Encryption (Sending an Internet Fax Encrypted by S/MIME)

You can send an Internet fax encrypted by S/MIME.

When sending an encrypted Internet fax, select an e-mail address associated with a certificate that can be encrypted, from the Address Book.

- Note This feature is supported only by the ApeosPort series.
 - To send an Internet fax encrypted by S/MIME, register certificates of the machine and the recipient's machine in advance. For information on certificates, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.
 - You can change the default value of [Internet Fax Encryption] in System Administration mode. For information on how to change the default value, refer to "5 Tools" > "Fax Service Settings" > "Fax Defaults" > "Internet Fax Encryption" in the Administrator Guide.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

■Off

Sends the Internet fax without encryption.

∎On

Sends the encrypted Internet fax.

Digital Signature (Sending an Internet Fax with a Digital Signature by S/MIME)

You can send an Internet fax with a digital signature by S/MIME.

Digital Signature allows a recipient to confirm whether the contents of the Internet fax are changed, or whether the Internet fax is sent from the proper sender.

Note

- This feature is supported only by the ApeosPort series.
 - To send an Internet fax with a digital signature by S/MIME, register certificates of the machine and the recipient's machine in advance. For information on certificates, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.
 - When [Digital Signature Outgoing Internet Fax] is set to [Do not add signature] or [Always add signature] in System Administration mode, depending on the selected option, [On] or [Off] is displayed on the [Digital Signature] screen, which cannot be changed. For information on [Digital Signature Outgoing Internet Fax], refer to "5 Tools" > "Connectivity & Network Setup" > "Security Settings" > "S/MIME Settings" in the Administrator Guide.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

∎Off

Sends the Internet fax without a digital signature.

Note

■On

Sends the Internet fax with a digital signature.

More Options

This section describes the features you can select on the [More Options] screen. The following shows the reference section for each feature.

- **1** Select [Fax/Internet Fax] on the [Services Home] screen.
- 2 Select a feature on the [More Options] screen.





Remote Polling (Retrieving Files from Remote Machines)

Remote Polling is a feature that allows your machine to retrieve a file stored in a remote machine. You are charged for the transmission fee.

This feature is used for Facsimile Information Services.

For information on Facsimile Information Services, refer to "Receiving Faxes" (P.239).

- Note The Remote Polling feature may be not available depending on the remote machine.
 - This feature is not available for the Server Fax service.
 - When you specify polling in combination with [Delay Start] on the [Fax/Internet Fax Options] screen, you can retrieve a file at a specified time.

■Remote Polling

You can retrieve a file stored on a remote machine by sending a polling request from your machine. You can also retrieve files from multiple machines. This is called Multi-Polling.

Secure Polling (DTMF Method)

You can retrieve a file from a folder on a remote machine by sending a request from your machine. A folder must be created on the remote machine. If the folder is passcode-protected, you can retrieve a file confidentially.

Important • You cannot use polling to retrieve files from multiple remote folders simultaneously.

Note • The DTMF method is not available for IP Fax (SIP).

Remote Polling

1 Select [Remote Polling].

2 Select [Poll a Remote Device].

recipients.

Remote Polling	istment Fax Options	g	On-hook (Manual Send/Receive
o Remote Polling	This feature allows you to re	¥ Ca	Д.
🗙 off	To retrieve files from a folder Device" on this screen and sp Remote Folder feature.	r of a remote devia	e, select "Poll a Remote

■Off

Note

Disables the Remote Polling feature.

■Poll a Remote Device

Enables the Remote Polling feature.

3 Specify a destination, and then press the <Start> button.

• To use Multi-Polling, specify multiple

Secure Polling (DTMF Method)

- **1** Select [New Recipients] on the [Fax/Internet Fax] screen to display the keyboard on the touch screen.
- **2** Enter a format corresponding to Auto Send or Manual Send, and then select [Close].
- **3** Select the [More Options] tab to display the [More Options] screen.



Pax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Pol Off	ling	Store for Polli Off	ng) On-hook (Manual Send/Receive)
Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
	Adjustment			0n-hook (Manual Send/Receive)
net Fax	Adjustment	Fax Options	· ·	
net Fax	Adjustment	Fax Options	· ·	

4 Select [Remote Polling].

4

5 Select [Poll a Remote Device].

👩 Remote Polling		💢 Cancel	🔶 Save
Voff Poll a Remote Device	This feature allows you to retrieve file To retrieve files from a folder of a rer Device" on this screen and specify the Remote Folder feature. This feature is unavailable for Interne	note device, selec e remote folder nu	t "Poll a Remot
Remote Polling		💥 Cancel	✓ Save
C Remote Polling	This feature allows you to retrieve fild To retrieve files from a folder of a rer Device" on this screen and specify the Remote Folder feature.	es from a remote r	nachine. t "Poll a Remot

■Off

6

Select [Save].

Disables the Secure Polling feature.

■Poll a Remote Device

Enables the Secure Poling feature.

■Format for Auto Send

Telephone number of	! * \$	Folder number on	* *	Passcode of folder on	\##\$
remote machine		remote machine		remote machine	

■Format for Manual Send

Telephone number of remote machine	Facsimile tone		
	Folder number on remote machine	← Passcode of folder on remote machine	# # Beep! Ready to start

- Use the keyboard on the touch screen to enter symbols such as "!" and "*". For information on how to enter characters, refer to "Entering Text" (P.68).
 - Enter a passcode only if necessary.
 - You can specify any machine that supports our DTMF method feature.

By registering destinations in address numbers using the above dialing formats, you can use the address numbers for the Secure Polling feature. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Store for Polling (Storing Files on the Machine that a Remote Machine can Retrieve)

Store for Polling is a feature that stores a file on your machine so that a remote machine can retrieve it from your machine. The following two methods are available for Store for Polling: Store for Free Polling and Store for Secure Polling.

The machine can be set to automatically delete files after they are retrieved with polling. For more information, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Polled Files - Auto Delete" in the Administrator Guide.

Note • This feature is not available for the Server Fax service.

1 Select [Store for Polling].

Store for Polling	 🗮 Cancel	Save

2 Select any option.

■Off

Disables the Store for Polling feature.

■Store for Free Polling

Stores a file in a public folder on the machine. The file in the public folder can be retrieved by a remote machine.

Store for Secure Polling

Stores a file in a private folder on the machine. If the folder is passcode-protected, the file can be retrieved by a remote machine confidentially.

Store for Secure Po

You need to create the private folder in advance. For more information on how to create a folder, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide.

■Save in:

When [Store for Free Polling] is selected

The [Public Folder] button is displayed. Selecting this button displays the [Public Folder] screen.

Refer to "[Public Folder] Screen" (P.228).

· When [Store for Secure Polling] is selected

The [Private Folder] button is displayed. Selecting this button displays the [Folder] screen. Select a folder to store files in for Secure Polling.

For information on how to select a folder, refer to "Selecting a Folder" (P.324). For information on how to check files for Secure Polling, refer to "Checking/Operating Files in a Folder" (P.325).

3 Press the <Start> button.

[Public Folder] Screen

This screen allows you to print and delete files stored for Free Polling.

- **1** Select the file to be printed or deleted. You can select either one file or all files.
 - Note Select [▲] to return to the previous screen or [▼] to move to the next screen.

📄 Pi	ublic Folder		🔇 Refr	esh	🔗 Close
	Number - Type	Stored Date	Pages		Number of Files: 28
1.	00001 - Store for Polling	2011/1/26 7:26 PM	9999	*	Select All
2.	00002 - Store for Polling	2011/1/26 7:26 PM	9999		Delete
3.	00003 - Store for Polling	2011/1/26 7:26 PM	9999		
4.	00004 - Store for Polling	2011/1/26 7:26 PM	9999		
5.	00005 - Store for Polling	2011/1/26 7:26 PM	9999		
6.	00006 - Store for Polling	2011/1/26 7:26 PM	9999	۲	Print

■Refresh

Refreshes the information about files stored in the public folder.

■Select All

Selects all files stored in the public folder.

■Delete

Deletes the selected file. Selecting this button displays a confirmation screen. Select [Delete] on the screen to delete the file.

■Print

Prints the selected file.

On-hook (Confirming Remote Machine Response Prior to Transmission)

Use this feature when using Manual Send.

Manual Send is a transmission method that allows you to send a fax after you make a phone call to a remote machine and then check that the connection is established. This feature can be used with the receiver either off-hook or on-hook.

We recommend that you set the line monitor volume to "Loud".

Note

- If an error occurs during transmission of, for example, the second page, the transmission of the first page may also end abnormally.
 - On-hook is not available for IP Fax (SIP).

You can change the volume of the line monitor in System Administration mode. For information on how to change the volume, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Line Monitor Volume" in the Administrator Guide.

1 Pick up the telephone receiver, or select [On-hook (Manual Send/Receive)].

2 s	Select	any	option.
------------	--------	-----	---------

Fax / Inter- Layout Adjustment	Fax / Internet More Op Fax Options	otions
Remote Polling Off	Off	Cn-hook (Manual Send/Receive)

On-hook	📕 Line Cut
Manual Send	
Manual Send 4 5 6 7 8 9 0 _	
Manual Receive E R T Y U I O P {	}
ASDFGHJKL:	• •
Shift Z X C V B N M < > ?	Shift
More Characters Space	

■Manual Send/Manual Receive

Use the drop-down menu to switch between [Manual Send] and [Manual Receive].

- Manual Send : Allows you to check if a connection is established before sending a fax.
- Manual Receive : Allows you to receive a fax manually, such as Facsimile Information Services.

■Entering a destination

Use alphanumeric characters to specify a destination.

■More Characters

Select this button to display a symbol screen, allowing you to use symbols to specify a destination.

■Line Cut

Cuts the line connected.

Broadcast

This section describes how to set Broadcast Send and Relay Broadcast.	
Broadcast Send (Transmitting to Multiple Recipients)	
Relay Broadcast (Transmitting Documents Through a Relay Station)	
Remote Relay Broadcast (Performing Relay Broadcast to Remote Locations)	

Broadcast Send (Transmitting to Multiple Recipients)

The Broadcast Send feature allows you to transmit the same document to multiple recipients in a single operation. There is no need to repeat the same operation for each recipient.

When the Additional G3 Port Kit 2 (optional) is installed, you can use the extra lines to make multiple transmissions simultaneously with Broadcast Send.

If you specify Broadcast Send, the machine prints a Broadcast/Multi-Poll Report after the Broadcast Send operation finishes.

- Note
- You can use Broadcast Send by specifying recipients from Fax, Internet Fax, and IP Fax (SIP), for a single job. (Mix Broadcast)
 - The maximum number of recipients that you can specify at one time is as follows: Using the numeric keypad: 200 locations; using address numbers: 600 locations; and using the numeric keypad in combination with address numbers: 600 locations.
 - The address numbers 0001 0070, or 0001 0060 correspond to one touch buttons 1 70, or 1 60. For more information on the one touch buttons, refer to "Control Panel" (P.59).
 - When using Broadcast Send, the Cover Page and Remote Folder features are not available even if they are enabled on the control panel. If you want to use [Cover Page] and [Remote Folder], set them when registering each recipient in an address number.
 - [Confirmation Options] is not available. Check the Broadcast/Multi-Poll Report to see the transmission results.
- **1** Select the first recipient.
 - Note When specifying recipients from Fax and Internet Fax for a single job (Mix Broadcast), select the fax type for each recipient from the drop-down menu.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Fax	Recipient[d001]:	Fax 0123456789		+ Add
Address	Sho	ow Fax No. / E-mail /	Address	
New Recipients				A
Redial List.				
Darken	Lighten Lighten Scar 1 Sided	ded nning	-	Resolution Standard (200x

- 2 Select [+ Add].
- **3** Select the next recipient.
- 4 Repeat steps 2 and 3.
- **5** Press the <Start> button.
- **6** Select [Yes] on the confirmation screen to start transmission.

Fax

The Relay Broadcast feature transmits documents to multiple recipients via other fax machines (relay stations). When a document is to be transmitted over a long distance to multiple recipients, it is first transmitted to one relay station and from there to multiple recipients. When you transmit documents over a long distance to many recipients, using Relay Broadcast can reduce transmission costs.

Furthermore, multiple Relay Broadcast operations can be performed simultaneously. This is called Multiple Relay Broadcast.

Note • For IP Fax (SIP), only Relay Broadcast with the F Code method is available.

The following three methods are available for Relay Broadcast:

Fax Signal Method

This method employs a Fuji Xerox proprietary communication procedure that is only for use with specific machines that have the Relay Broadcast feature.

■DTMF Method

G3 fax machines that support Manual Send can perform Relay Broadcast for the machine.

■F Code Method

This method can be used among machines that support the F Code and the Relay Broadcast features.

Before using the Relay Broadcast Feature

Before using the Relay Broadcast feature, register the following information.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Where	Contents
Initiating Station	 Fax Signal Method Assign the relay station to an address number (0001 to 2000) to set up the Relay Broadcast feature. Register the last two digits of the address number of the initiating station (which is already registered at a relay station) as a relay station ID for the Relay Broadcast operation. Register the address numbers or group dial number of the relay recipients (which are registered at a relay station) as broadcast recipients. The wildcard "*" can be used. DTMF Method (G3)/F Code Method No registration is required. The dialing format can be registered to an address number.

For information on the setting items to be registered in relay stations, refer to the documentation provided with relay stations.

Fax Signal Method

 Select an address number or group dial number to which a relay broadcast is registered, and press the <Start> button.
 To perform Multiple Relay Broadcast, repeat this step.

DTMF Method

The following two types are available in the DTMF method: Auto Send and Manual Send.

■Auto Send (Transmitting without picking up the receiver)

1 Select [New Recipients] to display the keyboard on the touch screen and enter the destination and password in the following format.



Password

A pre-registered 2-digit number

- By default, no password is set. Contact our Customer Support Center to set a password. If a password is not set, you do not need to enter one.
- Relay station ID

The last two digits of the initiating station address number registered at the relay station

Address number

An address number for the relay recipients registered at the relay station

The wildcard "*" can also be used.

You can register the above dialing format in an address number to send using the address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

2 Select [+ Add] to perform Multiple Relay Broadcast.

Note • You can specify up to 20 locations for relay recipients.

3 Press the <Start> button.

■Manual Send (Transmitting with picking up the receiver or on-hook)

1 Select the [More Options] tab to display the [More Options] screen.



- **2** Pick up the telephone receiver, or select [On-hook (Manual Send/Receive)].
- **3** Select [Manual Send] from the drop-down menu.

On-hook					📕 Line Cut
Manual Send 🗙					
Manual Send	4 5	6 7 8	3 9 0		
Manual Receive	ERT	YU	IO	P {	}
A S	DF	GH.	J K L		• @
Shift Z	x c v	BN	M <	> ?	Shift
More Characters	S	pace			

4 Use the keyboard displayed on the touch screen to enter the destination and password in the following format.

Relay station telephone number	Relay # station ID	Address # # # Beep	<u>)</u>
--------------------------------------	--------------------------	--------------------	----------

• You can specify up to 20 locations for relay recipients.

F Code Method

You can perform Relay Broadcast by registering the relay station's F code and password (if necessary) to the machine.

- When performing Relay Broadcast with the F Code method, you can use a password if you set a receive password for the relay station.
 - When performing Relay Broadcast between Fuji Xerox manufactured machines that can be used as both an initiating station and a relay station, we recommend that you use the fax signal method.
 - Confirm the F code (sub-address) and password of the target relay station.
- Select the [Fax/Internet Fax Options] tab to display the [Fax/Internet Fax Options] screen.

2	Select	IF Cod	del.
	001000		~~j.

Pax / Inter-	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Fo Off		F Code	TIFF-S	▲ 2/2 ▼

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options		*******
Remote Fol Off	lder	F Code If	TIFF-S	ernet Fax Profile	
) [_				
					2/2
					V

3	Select	[On].

F Code		💥 Cancel	🛷 Save
♥ Off ♥ On	F Code Password		Keyboard

4 Select the [F Code] box, and enter the F code with the numeric keypad.

Note • You can enter up to 20 digits for the F Code.

Relay Broadcast	Relay Station ID		Address Number		
					-

Up to 20	digits
----------	--------

Relay Broadcast

The number of digits of the relay station ID:

- 1: When the relay station IDs and address numbers are two digits
- 2: When the relay station IDs and address numbers are three digits

Fax

Print Directive

Printing/not printing at the relay station

1: Printing at the relay station

0: Not printing at the relay station

Relay Station ID

An address number for an initiating station registered at the relay station

When the relay station ID is set, the initiating station is notified of the results of a Relay Broadcast.

When the relay station ID is "00" or "000", the initiating station is not notified of the results of a Relay Broadcast.

Address Number

The address number assigned to the relay recipient

The following shows an example of an F Code that indicates printing at the relay station, notifying the initiating station (100) of the results, and performing Relay Broadcast to relay recipients (200, 201, 202, and 203).

F Code example: 21100200201202203

5 If necessary, enter the password using the numeric keypad.

Remote Relay Broadcast (Performing Relay Broadcast to Remote Locations)

The Remote Relay Broadcast feature combines two or more Relay Broadcast operations and uses Broadcast Send.

This feature is more economical than Relay Broadcast in transmitting documents to multiple remote machines.

Note • Multiple Relay Broadcast can be performed from a secondary relay station.

• For IP Fax (SIP), only Relay Broadcast with the F Code method is available.

The following three methods are available in Remote Relay Broadcast:

Fax Signal Method

This method employs a Fuji Xerox proprietary communication procedure that is only for use with specific machines that support the Relay Broadcast feature.

■DTMF Method

G3 fax machines that support Manual Send can perform Remote Relay Broadcast for the machine.

■F Code Method

This method can be used among machines that support the F Code and the Relay Broadcast features.

4 Fax

Register the following information in the address numbers of initiating stations in advance.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

Where	Contents
Initiating Station	 Assign the relay station to an address number (0001 to 2000) to set up the Relay Broadcast feature. Register the last two digits of the address number of the initiating station (which is already registered at a primary relay station) as a relay station ID. Register the address numbers or group dial number of the secondary relay stations (which are registered at a primary relay station) as broadcast recipients.

For information on the setting items to be registered in a primary relay station and a secondary relay station, refer to the documentations provided with them.

1 Select an address number or group dial number to which a remote relay broadcast is registered, and press the <Start> button.

DTMF Method

The following two types are available in the DTMF method: Auto Send and Manual Send.

For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

For information on the setting items to be registered in a primary relay station and a secondary relay station, refer to the documentations provided with them.

Note • You can specify any machine that supports our DTMF method feature.

Auto Send (Transmitting without picking up the receiver)

1 Select [New Recipients] to display the keyboard on the touch screen and enter the destination and password in the following format.



Password

A pre-registered 2-digit number

Note

By default, no password is set. Contact our Customer Support Center to set a password. If a
password is not set, you do not need to enter one.

· Relay Station ID

The last two digits of the initiating station address number registered at the primary relay station

Address Number

The address number for the secondary relay station registered at the primary relay station

You can register the above dialing format in an address number to send using the address number. For information on how to register address numbers, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

2 Select [+ Add] to perform Multiple Relay Broadcast.

■Manual Send (Transmitting with picking up the receiver or on-hook)

1 Select the [More Options] tab to display the [More Options] screen.

🥏 Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Poll Off	ing	Store for Pollin Off	ng	0n-hook (Manual Send/Receive)
]]	

- **2** Pick up the telephone receiver, or select [On-hook (Manual Send/Receive)].
- **3** Select [Manual Send] from the drop-down menu.

Manual Send	×				
I					
Manual Send	4	5 6	7 8 9	0 0	
Manual Receive		T			
	ER	TY	UI	O P	{ }
A	S D	FG	I L H	(L	

4 Use the keyboard displayed on the touch screen to enter the destination and password in the following format.

Primary relay station telephone	Facsimile tone H Beep! H Password	Relay station	#	Address	#	(# # Beep!	
number		ID		number				

• You can specify up to 20 locations for relay recipients.

F Code Method

When using the machine as the initiating station for performing Remote Relay Broadcast, confirm the F Code and the password (if necessary) for the primary relay station.

- Important When using the F Code method for Remote Relay Broadcast, the primary relay stations and secondary relay stations must support our F Code method and the Relay Broadcast feature.
- When performing Relay Broadcast with Fuji Xerox manufactured machines that can be used as both an initiating station and a relay station, we recommend that you use the fax signal method.
- Select the [Fax/Internet Fax Options] tab to display the [Fax/Internet Fax Options] screen.

Fax / Inter- net Fax	Layout Adjustment	Fax / Internet Fax Options	More Options	
Remote Fol	der Of		TIFF S	2/2 V

2 Select [F Code].


Pax / Inter-	Layout Adjustment	Fax / Internet Fax Options	More Options	510011037
Off	Ider Off		TIFF-S	▲ 2/2 ▼

3 Select [On].

😼 F Code		🗱 Cancel	🚽 🛷 Save
¥ ^{off}	F Code		
n 🖉 On	Password		
			Keyboard

4 Select the [F Code] box, and enter the F Code with the numeric keypad.

Note • You can enter up to 20 digits for the F Code.



Up to 20 digits

Relay Broadcast

The number of digits of the primary relay station ID:

- 1: When the primary relay station IDs and address numbers are two digits
- 2: When the primary relay station IDs and address numbers are three digits
- Print Directive

Printing/not printing at the primary relay station

1: Printing at the primary relay station

0: No printing at the primary relay station

• Primary Relay Station ID

The address number for the initiating station registered at the primary relay station When the primary relay station ID is set, the initiating station is notified of the results of the Remote Relay Broadcast.

When the primary relay station ID is "00" or "000", the initiating station is not notified of the results of a Remote Relay Broadcast.

Address Number

The address number assigned to the secondary relay station

5 If necessary, enter the password using the numeric keypad.

Receiving Faxes

Two modes are available for receiving faxes: Auto Receive and Manual Receive.

In Auto Receive mode, reception of a fax from a remote machine begins automatically.

In Manual Receive mode, reception of a fax from a remote machine is manual. This mode is convenient for confirming the sender or using an external telephone to confirm whether it is a fax before beginning reception.

Using G3-ID allows the machine to reject faxes from specific fax numbers or unknown fax numbers. You can register up to 50 fax numbers as fax numbers to be rejected.

• Rejecting faxes from specific fax numbers:

The machine rejects faxes when the G3-ID sent from the sender's machine is included in the registered fax numbers to be rejected.

• Rejecting faxes from unknown fax numbers:

The machine rejects faxes when the G3-ID is not sent from the sender's machine.

G3-ID contains a phone number and other information that are registered in the sender's machine.


Note • For IP Fax (SIP), Manual Receive mode is not available.

You can change the default value of [Fax Receiving Mode] in System Administration mode. For information on how to change the default value, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Fax Receiving Mode" in the Administrator Guide.

For information on how to reject faxes from specific fax numbers or unknown fax numbers, refer to "5 Tools" > "Fax Service Settings" > "Fax Control" > "Block Inbound Faxes" and "Block Unknown Fax Numbers" in the Administrator Guide.

Switching between Auto Receive and Manual Receive

- **1** Press the <Machine Status> button.
- 2 Select [Fax Receiving Mode] on the [Machine Information] screen.

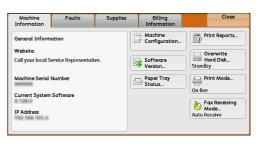

3 Select [Manual Receive] or [Auto Receive].

> Fax Receiving Mode	💥 Cancel	🛷 Save
Manual Receive		
Auto Receive		

Manual Receive

Reception of a fax from a remote machine is manual. This mode is convenient for confirming the sender or using an external telephone to confirm whether it is a fax before beginning reception.

When extra lines are added to the machine, [Fax Receiving Mode] is set to [Auto Receive] even when [Manual Receive] is selected.

Auto Receive

Reception of a fax from a remote machine begins automatically.

Using Auto Receive

When [Fax Receiving Mode] is set to [Auto Receive] on the [Machine Information] screen, the following two methods are available to receive a fax:

■When the machine automatically switches to fax reception

When there is an incoming call, the machine automatically receives a fax after it rings for a certain period of time.

When the machine automatically switches between a call and fax reception

When there is an incoming fax, the machine automatically receives the fax. When there is an incoming call, pick up the telephone receiver to talk while the machine is ringing.

Using Manual Receive

When [Fax Receiving Mode] is set to [Manual Receive], and the machine rings to notify of an incoming call, pick up the receiver of the external telephone or select [On-hook] on the screen displayed.

- We recommend that you set the monitor volume to [Loud] when using the On-hook feature.
 For information on how to change the volume of the line monitor, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Line Monitor Volume" in the Administrator Guide.
- **1** When the machine rings, the receiving screen appears.

If there is a telephone, pick the receiver up. If not, select [On-hook] on the receiving screen.

2 Confirm whether the call is from a telephone or a fax machine.

If the call is from a telephone, use the receiver to talk.

If the call is from a fax machine, you will hear the sound of a fax machine.

- **Note** If you select [On-hook], you will hear the sound from the machine speaker. However, you cannot talk to the other party.
- **3** Press the <Start> button.
- **4** If you picked up the receiver, place it back in the cradle when the <Data> indicator lights up on the control panel.

Important • Make sure to place the receiver back in the cradle properly. Otherwise, the line will remain "busy".

Using Folder Receive

Files received using Folder Receive are stored in a folder. After a file is received in a folder, the <Data> indicator lights up and the machine prints a Folder Report. The Folder Report lists the folder number and folder name.

To receive files in a folder using the F Code method, notify the sender of the following information:

- F Code (sub-address): 0 (to designate F Code transmission) and the folder number to store the file in
- Password (if necessary): the passcode of the folder to store the file in
- Note For IP Fax (SIP), fax signal method and F code method are available.
 - For IP Fax (SIP), in communicating via a VoIP gateway, the Sending to Folder with the fax signal method is not available. Only the Sending to Folder with the F code method is available.
 - The DTMF method is available for Remote Folder. The supported signals are numerals, "*", and "#" only.

Depending on the report print settings, a Folder Report may not be printed even after a file is received in a folder. For more information on the Folder Report settings, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Folder Report" in the Administrator Guide.

For information on how to print a file stored in a folder, refer to "Printing Files in a Folder" (P.328).

Fax 4


4 Fax

Facsimile Information Services

For information on subscriptions and advanced operating procedures, contact the corresponding facsimile information service.

Using the Receiver

1 Pick up the telephone receiver.



- **2** Select [Manual Receive] from the drop-down menu.
- **3** Specify the fax number of the facsimile information service.
 - You can use the numeric keypad, address numbers, or one touch buttons to specify the call destination, but you cannot use the Address Book.
 - You can use the keyboard displayed on the screen to specify the call destination. Selecting [More Characters] on the screen displays symbols.
 - When the line type is set to a tone line, [:] (Tone) is not displayed on the screen. If you want to send tones (or to use the touch-tone services) while using a pulse line, select [:] (Tone).
 - Some touch-tone services may not be available even if you set your telephone to send tones.
- **4** When the machine connects to the service, you will hear voice prompts. Follow the voice prompts to enter the required numbers.
- **5** After entering the numbers, press the <Start> button.
 - Note The <Data> indicator lights up on the control panel, and reception begins.
- **6** Place the receiver back in the cradle.
 - Important Make sure to place the receiver back in the cradle properly. Otherwise, the line will remain "busy".

When Not Using a Receiver

Adjust the volume of the line monitor.
 We recommend that you set the volume of the line monitor to [Loud] so that you can hear the voice prompts clearly.

For information on how to change the volume of the line monitor, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Line Monitor Volume" in the Administrator Guide.

2 Select [On-hook (Manual Send/Receive)] on the [More Options] screen.

· 🦻	Store for Pollir	1g 👔	On-hook (Manual Send/Receive)
			(Manda Senarkeceive)

- **3** Select [Manual Receive] from the drop-down menu.
- **4** Specify the fax number of the facsimile information service.
 - You can use the numeric keypad, address numbers, or one touch buttons to specify the call destination, but you cannot use the Address Book.
 - You can use the keyboard displayed on the screen to specify the call destination. Selecting [More Characters] on the screen displays symbols.
 - When the line type is set to a tone line, [:] (Tone) does not appear. If you want to send tones (or to use the touch-tone services) while using a pulse line, select [:] (Tone).
 - Some touch-tone services may not be available even if you set your telephone to send tones.
- **5** When the machine connects to the service, you will hear voice prompts. Follow the voice prompts to enter the required numbers.
- **6** After entering the numbers, press the <Start> button.

5 Scan

This chapter describes the basic operations and features for the Scan services.

Note • The Scan services are not available for some models. An optional component is required. For more information, contact our Customer Support Center.

To use the Scan services, network settings are required. For information on the network settings, refer to "9 Scanner Environment Settings" in the Administrator Guide.

•	Scanning Procedure	.246
•	Operations during Scanning	.254
•	E-mail	.257
•	Network Scanning	.277
•	Scan to PC	.279
•	Store to Folder	.285
•	Store to USB	.287
•	Store & Send Link	.293
•	Store to WSD	.296
•	Advanced Settings	. 300
•	Layout Adjustment	.305
•	E-mail Options/Filing Options	.313

Scanning Procedure

This section describes the basic scanning procedure. The following shows the reference section for each procedure.

Step 1 Loading Documents	
Step 2 Selecting the Features	
Step 3 Starting the Scan Job	
Step 4 Confirming the Scan Job in Job Status	
Step 5 Saving the Scanned Data	

Step 1 Loading Documents

The following two methods are available to load documents:

Document Feeder

- · Single sheet
- Multiple sheets

Document Glass

- · Single sheet
- · Bound documents, such as books

Document Feeder

The document feeder supports single and multiple sheet documents with sizes from $125 \times 110 \text{ mm}$ (Standard size: A5, A5⁽¹⁾) to $297 \times 432 \text{ mm}$ (Standard size: A3, $11 \times 17^{"}$).

The document feeder automatically detects standard size documents. For non-standard size documents, enter the size on the [Original Size] screen.

For information on document sizes that can be detected automatically and how to enter a non-standard document size, refer to "Original Size (Specifying a Scan Size)" (P.307).

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on paper size settings, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

The document feeder accepts the following number of sheets.


Document Type (Weight)	Number of Sheets
Lightweight paper (38 - 49 gsm)	110 sheets
Plain paper (50 - 80 gsm)	110 sheets
Heavyweight paper (81 - 128 gsm)	75 sheets


Important • To avoid paper jams, use the document glass for folded or wrinkled documents, cut-and-pasted documents, curled paper, or back carbon paper.

2-sided scanning of lightweight paper (38 - 49 gsm) is not supported.

For information on how to scan mixed sized documents, refer to "Mixed Size Originals (Scanning Different Size Documents Simultaneously)" (P.308).


- **1** Remove any paper clips and staples before loading a document.
- **2** Load the document face up (when the document is 2-sided, place the front side up) in the center of the document feeder.
 - Note Normally, load the document in the [Sideways Images] orientation. The document is displayed in the [Upright Images] orientation when viewed on a computer.
 - The confirmation indicator lights up when the document is loaded correctly. If the indicator does not light, the machine may be detecting a document on the document glass. Load the document again.
- **3** Adjust the document guides to match the size of the document loaded.





Scan 19

4 Raise the document stopper.



Document Glass

The document glass supports a single sheet, a book, or other similar documents with sizes from $15 \times 15 \text{ mm}$ to $297 \times 432 \text{ mm}$ (Standard size: A3, 11×17 ").

Important • Always close the document cover after using the document glass.


The document glass automatically detects standard size documents. For non-standard size documents, enter the size on the [Original Size] screen.

For information on document sizes that can be detected automatically and how to enter a non-standard document size, refer to "Original Size (Specifying a Scan Size)" (P.307).

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on the paper size settings, refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

Do not apply excessive force to hold thick document on the document glass. It may break the glass and cause injuries.

- **1** Open the document cover.
 - Important Ensure that the touch screen is active, and then load a document. Otherwise, the machine may not properly detect the document size.
- **2** Load the document face down, and align it against the top left corner of the document glass.





3 Close the document cover.

Step 2 Selecting the Features

On the [Services Home] screen, you can select from seven Scan services: [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store to USB], [Store & Send Link], and [Store to WSD]. You can select features for each service.

Note

- The features displayed on the screen depend on your machine configuration.
 - When the Accounting feature is enabled, a user ID and passcode may be required. Ask your system administrator for the user ID and passcode.
 - To use the Scan services, network settings are required. For information on the network settings, refer to "9 Scanner Environment Settings" in the Administrator Guide.

■E-mail

Scans a document and sends the scanned data as an e-mail attachment after converting the data to a TIFF, JPEG, PDF, DocuWorks, or XPS (XML Paper Specification) file.

Store to Folder

Scans a document and saves the scanned data in a folder on the machine.

You need to create a folder in advance. For information on how to create a folder, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide.

Network Scanning

Scans a document using a job template created on CentreWare Internet Services.

When Scan to Home is enabled and the Remote Access feature is available, the scanned data can be transferred to a different destination according to an authenticated user.

For information on how to create a job template, refer to the help of CentreWare Internet Services.

Scan to PC

Scans a document and sends the scanned data to a network computer via the FTP or SMB protocol.

Store to USB

Scans a document and saves the scanned data to a USB memory device.

■Store & Send Link

Scans a document and temporarily saves the scanned data on the machine. The URL for the location where the scanned data is stored is sent to the user via e-mail. Then, the user can access the URL to retrieve the scanned data.

■Store to WSD

You can scan documents set on the machine and save the scanned data by operating from a computer. Also, you can save the scanned data to a computer on the network.

The following table shows file formats available for each Scan service.

Scan	File Format can			Fil	e Form	nat		
Service	be Selected When	PDF	Docu- Works	XPS* ¹	TIFF	JPEG	BMP	PNG
E-mail	Using the control	0 ^{*2}	O*3	0	0	0	Х	Х
Scan to PC	panel when scanning	O*2	O*3	0	0	0	Х	Х
Store to USB		O*2	O*3	0	0	0	Х	Х
Store & Send Link		O*2	O*3	0	0	0	Х	х
Scan to Folder	Using CentreWare Internet Services	O*2	O*3	0	0	0	Х	х
	Using Stored File Manager 3	Х	х	Х	0	0	Х	х
	Using DocuWorks ^{*4}	Х	O*3	Х	Х	х	Х	х
	Using EasyOperator	Х	х	Х	0	0	Х	х
	Using Adobe Acrobat ^{*4}	O*2	х	Х	Х	х	Х	х
Job Flow Sheet (ApeosPort series models only)	Creating a job flow	O*2	O*3	0	0	0	х	x
Network Scanning (ApeosPort series models only)	Creating a job template	0	x	0	0	0	х	x
Store to WSD	Using [Scan Profiles] of Windows ^{*5}	х	x	0	0	0	0	0

O Available

X Not available

*1 XPS stands for XML Paper Specification. *2 Supported on Acrobat 4.0 or later

*3 Supported on DocuWorks Ver.4 or later

*4 TWAIN compatible application

*5 Windows Vista Service Pack 2 or later

Note • If you do not specify a file name for the document to be saved, a file name is automatically assigned to each file or folder based on a particular rule. For example, the file name "img-123123456" indicates that the document was scanned at 12:34:56 on January 23. X, Y, and Z represent October, November, and December, respectively.

The following describes how to store scanned data into a folder as an example.


1 Press the <Services Home> button.

2 Select [Store to Folder].

<Clear All> button.

<Services Home> button Language 0 Scree Brightr E-mai



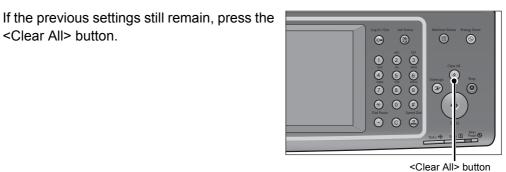

4 Specify a folder to save the data in.

Select each tab, and configure features as

Layout Filing Options

Store to Folder Advanced Settings Go to 001 ↔ 200 002 TEST2 003 TEST3 004 TEST4 001 TEST1 008 TEST8 005 TEST5 006 TEST6 007 TEST7 009 TEST9 010 TEST10 011 TEST11 012 TEST12 Preview 2 Sided Scanning 1 Sided Original Type Color Scanning •

Photographs Off	Lighten / Darken: Normal Sharpness: Normal	Auto Suppression Contrast: Normal
Shadow Suppression	Color Space SRGB	

Scan 5

3

5

necessary.

The following shows the reference section for each tab.

"Store to Folder" (P.285) "Advanced Settings" (P.300)

"Layout Adjustment" (P.305)

"E-mail Options/Filing Options" (P.313)

When you use another Scan service, [Store to Folder] is replaced with [E-mail], [Network Scanning], [Scan to PC], [Store to USB], [Store & Send Link], or [Store to WSD].

The following shows the reference section for each service.


"E-mail" (P.257) "Scan to PC" (P.279) "Store to USB" (P.287) "Store & Send Link" (P.293) "Network Scanning" (P.277) "Store to WSD" (P.296)

Step 3 Starting the Scan Job

The following describes how to start a scan job.

For information on how to start a scan job on the [Store to WSD] screen, refer to "Store to WSD" (P.296).

- 1 Press the <Start> button.
 - Important If the document has been loaded in the document feeder, do not hold down the document while it is being conveyed.
 - If a copy protection code is detected, the machine will not scan the document.
 - If a problem occurs, an error message Note appears on the touch screen. Follow the instructions of the message to solve the problem.
 - · You can set the next job during scanning.



<Start> button

■If you have more documents

If you have more documents to scan, select [Next Original] on the touch screen while the current document is being scanned. This allows you to scan the documents as a single set of data.

Up to 999 pages can be stored.

• If the number of pages scanned by the machine exceeds the maximum, the machine stops Note scanning. Follow the message displayed on the screen, and either abort the operation or save the already-scanned data as a single set of data.

Scan

2 While documents are being scanned, select [Next Original].

- Note
- When using the document feeder, load the next document after the machine has finished scanning the first document.
 - When [Next Original] is displayed on the screen shown on the right and no operation is performed for a certain period of time, the machine automatically assumes that there are no more documents.
 - You can change the scan settings of the next document by selecting [Change Settings] that is displayed after selecting [Next Original].
- Store to Folder
 File 00101
 Constraint


 Save in: Folder 001 TEST1
 File Name: img-715164436

 Delete

 Pages:
 2


 Last Original
 Next Original

3 Load the next document.



Press the <Start> button.If you have more documents, repeat steps 3 and 4.

5 When all documents have been scanned, select [Last Original].






Step 4 Confirming the Scan Job in Job Status


The following describes how to confirm the status of a scan job.

1 Press the <Job Status> button.



2 Confirm the job status.

- Note
- Select [▲] to return to the previous screen or [♥] to move to the next screen.
 - From the drop-down menu, you can select [Scan, Fax, & Internet Fax Jobs] and display the desired job.

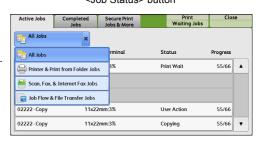

Step 5 Saving the Scanned Data

When you used the Store to Folder service, you can use the following methods to import the file stored in a folder of the machine to your computer:

■Import using an application

Use Network Scanner Driver. Refer to "Importing to a TWAIN Compatible Application" (P.396).

Import using Stored File Manager 3

Use Stored File Manager 3 (Fuji Xerox application software). Refer to "Importing Using Stored File Manager 3" (P.398).

Import using CentreWare Internet Services

Use CentreWare Internet Services. Refer to "Importing Using CentreWare Internet Services" (P.401).

Import using EasyOperator

Use EasyOperator (Fuji Xerox application software). Refer to "Importing Using EasyOperator" (P.403). Scan

5

Operations during Scanning

 The following describes the operations available during scanning. The following shows the reference section for each operation.

 Stopping the Scan Job
 254


 Previewing the Scanned Images during a Scan Job
 255

 Changing the Scan Settings
 256


Stopping the Scan Job

To cancel scanning a document, use the following procedure.

1 Press either the <Stop> button on the control panel or [Delete] on the touch screen.




I Store to Folder	File 00101	Close
Save in: Folder 001 - TEST1 File Name: img-715164436		Delete
Pages: 2		Last Original
A4 C Black & White 200 dpi 100%	Ļ	

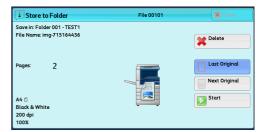

2 Select [Delete].

■If [Delete] does not appear on the screen:

1 Press the <Job Status> button.



Select the job to cancel. Print Waiting Jobs Close Active Job Completed Sec All Jobs • File / Job Type Re Status note Termina Progress 444 00004 - Store to Folder Folder 001 Scanning . 02222 - Copy 11 x 22mm:3% User Action 55/66 02222 - Copy 11 x 22mm:3% Copying 55/66 v Select [Delete]. File 00101 Store to Folder Save in: Folder 001 - TEST1 File Name: img-715164436 🗙 Delete Last Original 2 Next Original Select [Delete]. 1 Store to Folder File 00101 Save in: Folder 001 - TEST1 File Name: img-715164436 Note • If you cancel the job, the scanned data Delete stored in the folder will also be deleted. Last Original 2 αge Next Original Start A4 (Black & 200 dp 100%

Scan 5

Previewing the Scanned Images during a Scan Job

You can preview the scanned images while scanning the document.

- Important You cannot preview the scanned images when [MRC High Compression] is set to [On] or the [Specific Color] check box is selected on the [File Format] screen.
- You cannot preview the scanned images on the touch screen of the machine for [Store to WSD].
- 1 Select [Next Original].

2

3

4



2 Select [Preview] to display a preview screen. The first page of the last scanned document is displayed.



3 From the drop-down menu, specify the view size by selecting [Whole Page] or [Enlarge View], and set [Current Page].

🔍 Preview for Store to F	older	🛷 Close
Whole Page	Domain A	Current Page 1 ↔ 2 2 - +


4 After the confirmation, select [Close] to close the preview screen.

Changing the Scan Settings

You can change the scan settings while scanning the document.

Note • For [Store to WSD], you cannot change scan settings while scanning the document.

1 Select [Next Original].

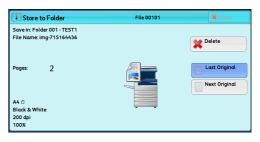

2 Select [Change Settings].

1 Store to Folder	File 00101	Close
Save in: Folder 001 - TEST1		
File Name: img-715164436		X Delete
Pages: 2		Last Original
		Next Original
A4 🗅		Start
Black & White		
200 dpi 100%	Preview	Change Settings

3 Set [Color Scanning], [Original Type], [Resolution], [Lighten/Darken], [Original Orientation], [2 Sided Scanning], and [Original Size].

The following shows the reference section for each feature.

"Color Scanning (Selecting an Output Color)" (P.265)

"Original Type (Selecting the Document Type)" (P.267)

"Resolution (Specifying a Scanning Resolution)" (P.305)

"Image Options (Adjusting Scan Density and Image Sharpness)" (P.301)

- "Original Orientation (Specifying the Orientation of the Loaded Documents)" (P.312)
- "2 Sided Scanning (Scanning Both Sides of a Document)" (P.306)
- "Original Size (Specifying a Scan Size)" (P.307)
- **4** Press the <Start> button.

E-mail

This section describes the features you can select on the [E-mail] screen. The E-mail service allows you to scan a document and send the scanned data as an e-mail attachment. The following shows the reference section for each feature.

Address Book (Specifying an E-mail Address)	
New Recipient (Entering an Address)	
Add Me (Adding the Sender's Address)	
Recipient(s) (Editing a Recipient)	
From (Setting the Sender's Address)	
Subject (Setting the Subject)	
Message (Entering the E-mail Body)	
Preview (Previewing the Scanned Images during a Scan Job)	
Color Scanning (Selecting an Output Color)	
2 Sided Scanning (Scanning Both Sides of a Document)	
Original Type (Selecting the Document Type)	
File Format (Selecting a File Format for Output Data)	

 You can encrypt an e-mail or send it with a digital signature by S/MIME. To use this feature, you need to register certificates of the machine and the recipient's device in advance. For information on certificates, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.

You can customize the layout of the features displayed on the [E-mail] screen. For more information, refer to "5 Tools" > "Scan Service Settings" > "First Tab" in the Administrator Guide.

1 Select [E-mail] on the [Services Home] screen.

Note



- **2** Select a feature on the [E-mail] screen.
 - Important You can specify recipients registered for e-mail, but not for faxes.
 - You cannot use address numbers using the numeric keypad, one touch buttons, or group numbers to specify recipients.
 - The [New Recipient] and [Add Me] buttons may not be displayed depending on the settings made in System Administration mode.

E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipien	t(s)		From:
Address Book				mail@add.ress
New Recipient				Subject
👷 Add Me				Message
Preview			· · · · · · · · · · · · · · · · · · ·	
Color Scanning lack & White		nning 🔺 🗌	Original Type	File Format

Address Book (Specifying an E-mail Address)

The following describes how to select a recipient using the Address Book.

When sending an encrypted e-mail, select an e-mail address associated with a certificate that can be encrypted, from the Address Book.

To use this feature, an e-mail address associated with a certificate for S/MIME must be registered in the Address Book in advance. For information on how to set the Address Book, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

To verify the validity of a certificate, prior settings are required. For information on the settings, refer to "5 Tools" > "Connectivity & Network Setup" > "Security Settings" > "Certificate Revocation Retrieval Settings" in the Administrator Guide.

1 Select [Address Book].



2 Select a recipient from the address list, and then select [To], [Cc], or [Bcc].

E-mail Address Book				🔶 Close	•
List all public entries	Go ta	•	Recipient(s)	Show E-mo Address	uil
0100 E-mail Name 100 <ma< th=""><th>il_add 🔺</th><th>To →</th><th></th><th></th><th>4</th></ma<>	il_add 🔺	To →			4
0101 E-mail Name 101 <ma< td=""><td>il_add</td><td></td><td></td><td></td><td></td></ma<>	il_add				
0102 E-mail Name 102 <ma< td=""><td>il_add</td><td>Cc →</td><td></td><td></td><td></td></ma<>	il_add	Cc →			
0103 E-mail Name 103 <ma< td=""><td>il_add</td><td>Bcc →</td><td></td><td></td><td></td></ma<>	il_add	Bcc →			
0104 E-mail Name 104 <ma< td=""><td>il_add ▼</td><td>1</td><td></td><td></td><td>7</td></ma<>	il_add ▼	1			7

Note • When specifying multiple recipients, specify them continuously.

- To search for recipients by other methods, select and switch to [List all public entries], [Search Public], or [Search Network] from the drop-down menu on the [E-mail Address Book] screen. The methods that appear in the drop-down menu depend on the settings made in System Administration mode.
- Depending on the network settings, [Search Network] may not appear in the drop-down menu. For information on the Network settings, refer to "5 Tools" > "Connectivity & Network Setup" > "Remote Authentication/ Directory Service" > "LDAPServer/ Directory Service Settings" in the Administration Guide.
- **Important** When specifying an e-mail address, check if the address contains a domain that is not permitted for use. In such cases, the address cannot be used.

■List all public entries

Displays the local address list.

Refer to "When [List all public entries] is Selected" (P.259).

Search Public

Searches recipients in the local address list.

Refer to "When [Search Public] or [Search Network] is Selected" (P.259).

Search Network

Searches recipients in the remote address list.

- Note This feature is supported only by the ApeosPort series.
 - To display [Search Network], the prior setting must be made in System Administration mode.

Refer to "When [Search Public] or [Search Network] is Selected" (P.259).

■Name/E-mail Address

Lists names and e-mail addresses.

■To

Sets the selected address as a recipient.

■Cc

Sets the selected address as Cc.

■Bcc

Sets the selected address as Bcc.

■Go to

Enter an address number using the numeric keypad to display the e-mail address at the top of the list.

■[1] button

Displays detailed information on the selected recipient.

Show E-mail Address

Select this check box to display only e-mail addresses in the list.

When [List all public entries] is Selected

- **1** Select a recipient from a list under [Name/E-mail Address].
 - Note
- Select [▲] to return to the previous screen or [▼] to move to the next screen.
- You can sort recipients in alphabetical order or address number order.

E-mail Address Book		Close
List all value of the second s	Go to	Show E-mail Address
Name / E-mail Address	Recip	lent(s)
0100 E-mail Name 100 <mail_add< td=""><td></td><td></td></mail_add<>		
0101 E-mail Name 101 <mail_add< td=""><td></td><td></td></mail_add<>		
0102 E-mail Name 102 <mail_add< td=""><td>Cc→</td><td></td></mail_add<>	Cc→	
0103 E-mail Name 103 <mail_add< td=""><td>Bcc →</td><td></td></mail_add<>	Bcc →	
0104 E-mail Name 104 <mail_add< td=""><td>•</td><td></td></mail_add<>	•	

When [Search Public] or [Search Network] is Selected

- **1** Enter keywords to search for an address.
 - The screen shown on the right appears when [Search Public] is selected.
 - When multiple keywords are used, the address is searched with the AND clause.

For information on how to enter characters, refer to "Entering Text" (P.68).



■Name

Searches with a recipient name as a keyword. Selecting the field for [Name] under [Keyword] displays the screen for entering the keyword. Up to 32 characters are allowed.

Example: John Smith

E-mail Address

Searches with an e-mail address as a keyword. Selecting the field for [E-mail Address] under [Keyword] displays the screen for entering the keyword. Up to 128 characters are allowed.

Example: myhost@example.com

■Custom Item

Select this option to search with a keyword item other than a recipient name and e-mail address.

Select any option from [Custom Item] and then select the box under [Keyword] to display a screen for entering a keyword. Up to 60 characters are allowed.

Note • You can select only one custom item.

• None

No custom item is used for the keyword search.

Custom Item 1 (Telephone Number)

[Telephone Number] is set by default. When selected, a telephone number is used for the keyword search.

Custom Item 2 (Office)

[Office] is set by default. When selected, an office name is used for the keyword search.

Custom Item 3 (Department)

[Department] is set by default. When selected, a department name is used for the keyword search.

For information on how to change the settings for the custom items, refer to "5 Tools" > "Connectivity & Network Setup" > "Remote Authentication/Directory Service" in the Administrator Guide.

■Keyword

Select a keyword item, and then enter the keyword.

■Search

The search starts. The searched results are listed on the screen.

New Recipient (Entering an Address)

You can enter e-mail addresses using the keyboard.

Select [New Recipient].

E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipien	t(s)		From:
Address Book			*	mail@add.ress
New Recipient				Subject
Add Me				Message
Preview			T	
Color Scanning Black & White	2 Si Sca 1 Sided	nning 🔺	Original Type	File Format

2 Use the keyboard displayed on the screen to enter an e-mail address with up to 128 characters.

Recipien	t List										🕜 Close
Fo: 0 Cc: 0 B	cc: 0							Ę	+ Add		Delete Ter
· 1	2	3	4	5 r	6 t	7 y	8) 9 i	0) - (Backspace
(a	s	d	f	g	h	j	k	l		• •
Shift	z		x	c	v	b	n	m		. /	Shift
More Ch	aracte	rs			Space			40			

■To/Cc/Bcc

Allows you to switch the recipient type (To/Cc/Bcc) from the drop-down menu.

∎+ Add

Allows you to add e-mail addresses to send e-mails to multiple recipients (Broadcast).

■[💽] button

Searches for names.

■Delete Text

Deletes all the entered e-mail addresses.

■Backspace

Moves the cursor back to delete one character.

∎Shift

Used for entering uppercase characters.

■More Characters

Displays symbols. Use this button to enter symbols for the e-mail address.

Add Me (Adding the Sender's Address)

The sender's address can be added to [To], [Cc], or [Bcc].

1 Select [Add Me].

2 Select any option.



■To

Adds the sender's address to To.

■Cc

Adds the sender's address to Cc.

■Bcc

Adds the sender's address to Bcc.

Recipient(s) (Editing a Recipient)

You can confirm, delete, or edit recipients using the pop-up menu displayed.

1 From the [Recipient(s)] list, select the recipient to be deleted, confirmed, or edited.

😑 E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
Address Book New Recipient	Recipien	Remove Kelit Close Menu		From: mail@add.ress Subject
Preview				Message
Color Scanning Black & White	2 Sic Scal 1 Sided	nning 🔺 🗎	Original Type oto & Text	File Format DocuWorks

2 Select any option from the pop-up menu.

Remove

Removes the selected recipient.

■Edit

Displays the [Edit Recipient] screen on which you can confirm or edit the recipient. Refer to "[Edit Recipient] Screen" (P.262).

■Close Menu

Hides the pop-up menu.

[Edit Recipient] Screen

This screen allows you to confirm and change the settings for the recipient.

- **1** Select the item to be changed.
- 2 Select [Edit].

🚖 E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
Address Book	Recipien	Remove		From: mail@add.ress
New Recipient		🔀 Edit 🔀 Close Menu		Subject
Add Me			· · · · · · · · · · · · · · · · · · ·	Message
Color Scanning Black & White	2 Si Sca 1 Sided	nning 🔺 🕴	Original Type	File Format DocuWorks

3 Select any option.

Edit Recipient	<u> </u>	🤌 Sαve
tems	Current Settings	
1. E-mail Address	mail_address100@co.jp	
2. Name	E-mail Name 100	

■E-mail Address

To change the e-mail address, select this item to display the keyboard and enter a new address.

■Name

To change the recipient name, select this item to display the keyboard and enter a new name.

When the recipient name is registered in the Address Book, that recipient name is displayed.

■S/MIME Certificate

To check whether or not any certificate is linked to the e-mail address, select [Change Settings].

If S/MIME is enabled, and a certificate is linked to the e-mail address, you can check the contents of the S/MIME certificate.

Note • This feature is supported only by the ApeosPort series.

For information on S/MIME communication, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.

From (Setting the Sender's Address)

Specify the sender's e-mail address. You can specify only one address as the sender's address.

- When the Authentication feature is enabled, the e-mail address registered in user information is automatically set as the sender's address. For more information on user information, refer to "5 Tools" > "Accounting" > "Create/View User Accounts" in the Administrator Guide.
 - [From] may not be editable depending on the setting made in System Administration mode.
 - When you send an e-mail with a digital signature, the machine's e-mail address becomes the sender's address.

For information on a digital signature, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.

1 Select [From].

合 E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipien	t(s)		From:
Address Book				mail@add.ress
New Recipient				Subject
Add Me				Message
Preview				
Color Scanning Black & White	2 Si Sca 1 Sided	nning 🔺 🕯	Original Type	File Format DocuWorks

2 Select any option from the pop-up menu displayed.

음 E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipier	nt(s)		From:
Address Book				Address Book
New Recipient				Keyboard
Add Me				Close Menu Message
Preview			▼	
Color Scanning Black & White		anning 🔺	Original Type	File Format

Address Book

Allows you to select an e-mail address from the Address Book as the sender's e-mail address.

For information on the Address Book, refer to "Address Book (Specifying an E-mail Address)" (P.258).

Keyboard

Allows you to enter the sender's e-mail address with up to 128 characters using the displayed keyboard.

■Close Menu

Hides the pop-up menu.

Subject (Setting the Subject)

You can specify the e-mail subject using one of the following procedures.

Auto Set

Automatically sets the subject to [Scan data from XXX] (where XXX is the host name of the machine).

■To set a user-defined subject

- **1** Select [Subject].
- **2** Enter a subject with up to 128 characters using the displayed keyboard.

For information on how to enter characters, refer to "Entering Text" (P.68).

Message (Entering the E-mail Body)

You can enter the e-mail body using the following procedure.

- **1** Select [Message].
- **2** Enter a message with up to 512 characters using the displayed keyboard. For information on how to enter characters, refer to "Entering Text" (P.68).

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document.

1 Select the [Preview] check box.

👝 E-mail	Advanced Settings	Layout Adjustmen	E-mail Opti	ons	
	Recipier	nt(s)			From:
Address Book					mail@add.ress
New Recipient					Subject
Add Me					Message
Preview				<u> </u>	
Color Scanning Black & White		ided anning	Original Ty Photo & Text	pe	File Format DocuWorks

- 2 Preview the scanned images after the document is scanned.
 - Important You cannot preview the scanned images when [MRC High Compression] is set to [On] or the [Specific Color] check box is selected on the [File Format] screen.

Color Scanning (Selecting an Output Color)

You can set the output color for scanning a document.

1 From the menu displayed by selecting [Color Scanning], select any option.

E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipier	it(s)		From:
Address Book				mail@add.ress
🕞 Auto Detect				Subject
Color				
en Black & Wh	ite			Message
骨 Grayscale				
Color Scanning Black & White		inning 🔺 🗎	Original Type	File Format

■Auto Detect

The color of the document is determined automatically; the machine scans in full color when the document is colored, otherwise scans the document in monochrome.

• When you select [Auto Detect], the available features on the [Advanced Settings] screen are the same as when you select [Color] in [Color Scanning] for color documents, or the same as when you select [Black & White] in [Color Scanning] for monochrome documents.

■Color

Scans a document in full color.

Black & White

Scans a document in monochrome two tones. You can select the document type in [Original Type].

• When you select [Black & White] , [MRC High Compression] on the [File Format] screen will be set to [Off].

Grayscale

Scans a document in grayscale. Adds shades to monochrome, creating intermediate tones that change gradually. Suited to documents containing gradations that cannot be reproduced with monochrome (2-color tone) scanning.

2 Sided Scanning (Scanning Both Sides of a Document)

You can scan a 1-sided or 2-sided document on one or both sides of paper.

By setting the binding style, both sides are scanned in the same orientation.

 From the menu displayed by selecting [2 Sided Scanning], select any option.

E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipien	it(s)		From:
Address Book			A	mail@add.ress
New Recipient		ded		Subject
🧟 Add Me		ided (Head to Hea		Message
Preview	-	re	· · · · · ·	
Color Scanning Black & White		inning 🗶 🛛	Original Type	File Format

■1 Sided

Select this option to scan only one side of the document.

2 Sided (Head to Head)

Select this option when both sides of the 2-sided document are in the same orientation.

■2 Sided (Head to Toe)

Select this option when both sides of the 2-sided document are in opposite orientations.

■More

Displays the [2 Sided Scanning] screen. Refer to "[2 Sided Scanning] Screen" (P.266).

[2 Sided Scanning] Screen

This screen allows you to select the status and orientation of original documents.

1 Select any option.

\overline Z Sided Scan	ning	🗱 Cancel	🤣 Save
1 Sided	Originals	Up	Orientation oright Images deways aages

■1 Sided

Select this option to scan only one side of the document.

2 Sided

Select this option to scan both sides of the document.

Originals

This option is displayed when [2 Sided] is selected.

Head to Head

Select this option when both sides of the 2-sided document are in the same orientation.

Head to Toe

Select this option when both sides of the 2-sided document are in opposite orientations.

Original Orientation

Specify the orientation of the loaded document.

When you load the top edge of the document against the left side of the document glass or the document feeder, and then select [Sideways Images], the document is displayed in the correct orientation when viewed on your computer screen.

Load the document in the [Sideways Images] orientation when [File Format] is set to [TIFF/JPEG Auto Select], [TIFF], or [JPEG]. The document is displayed in the [Upright Images] orientation when viewed on your computer screen.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or the document feeder.

Original Type (Selecting the Document Type)

When you select [Black & White] in [Color Scanning], select the document type.

1 From the menu displayed by selecting [Original Type], select any option.

E-mail	Advanced Settings	Layout Adjustment	E-mail Options	
	Recipien	it(s)		From:
Address Book				mail@add.ress
New				Subject
Recipient		- 6	Photo & Text	
Add Me			FIIOTO & TEXT	
457			Text	Message
Preview			🔛 Photo	
Color Scanning Black & White		inning 🔺 📘	Original Type	File Format

■Photo & Text

Select this option when scanning a document that contains both text and photos. The machine automatically identifies the areas with text and those with photos, to scan each area with optimum quality.

■Text

Select this option to scan text clearly.

■Photo

Select this option when scanning photos.

Note • [Photo] cannot be selected when [Searchable Text] is set to [Searchable] on the [File Format] screen.

File Format (Selecting a File Format for Output Data)

You can select a file format for scanned data.

- **Note** If the High Compression Image Kit (optional) is installed, the machine can save PDF, DocuWorks, and XPS files with high compression.
 - If the High Compression Image Kit (optional) is installed, scanned data containing a small number of colors can be compressed with the Specific Color feature. For more information, refer to "Specific Color" (P.270).
- **1** From the menu displayed by selecting [File Format], select any option.

🚗 E-mail	Advanced Settings	Layout Adjustment	E-mail Option	5
-	Recipien	it(s)		👍 TIFF / JPEG Auto Select
Address Book			Í	TIFF TIFF
New				⁷⁰ JPEG
Recipient			1	PDF
Add Me			6	DocuWorks
Preview				More
Color Scanning Black & White		inning 🔺 🗉	Original Type	File Format DocuWorks

■TIFF/JPEG Auto Select

Automatically selects JPEG or TIFF format. The file format is determined for each page: [JPEG] for full-color and grayscale pages, and [TIFF] for monochrome pages.

■TIFF

Saves scanned data in TIFF format.

■JPEG

Saves scanned data in JPEG format. This option can be selected when either [Color] or [Grayscale] is selected in [Color Scanning].

■PDF

Saves scanned data in PDF format.

• The version of PDF files is Adobe[®]Acrobat[®] 4.0 (PDF 1.3).

DocuWorks

Saves scanned data in DocuWorks format.

- To browse or print DocuWorks files on a computer, one of the following software is required:
 - DocuWorks 4.0 or later
 - DocuWorks Viewer Light 4.0 or later
 - DocuWorks Viewer Light for Web 4.0 or later

■More

Displays the [File Format] screen. Refer to "[File Format] Screen" (P.268).

[File Format] Screen

This screen allows you to select all of the options available for File Format.

1 select any option.

📒 File Format		🗶 Can	icel 🛛 🧇 Save
TIFF / JPEG	PDF	Compression Method	PDF Security
IFF JPEG	DocuWorks	MRC High Compression	PDF Signature
Specific Color	Single File for Each Page	Searchable Text Image Only	Optimize For Quick Web View

■TIFF/JPEG Auto Select

Automatically selects JPEG or TIFF format. The file format is determined for each page: [JPEG] for full-color and grayscale pages, and [TIFF] for monochrome pages.

■TIFF

Saves scanned data in TIFF format.

■JPEG

Saves scanned data in JPEG format. This option can be selected when either [Color] or [Grayscale] is selected in [Color Scanning].

■PDF

Saves scanned data in PDF format.

• The version of PDF files is Adobe[®]Acrobat[®] 4.0 (PDF 1.3).

■DocuWorks

Saves scanned data in DocuWorks format.

- Note To browse or print DocuWorks files on a computer, one of the following software is required:
 - DocuWorks 4.0 or later
 - DocuWorks Viewer Light 4.0 or later
 - DocuWorks Viewer Light for Web 4.0 or later

■XPS

Saves scanned data in XPS format.

■Compression Method

Allows you to select a compression method for scanned image data.

- Note When you select [Auto], the following compression methods will be used:
 - When [Original Type] is set to [Photo & Text] or [Text] for black-and-white images: MMR
 - When [Original Type] is set to [Photo] for black-and-white images: MH
 - For grayscale and color images: JPEG
 - When you select [TIFF], [DocuWorks], or [XPS] and then select [Manual Select] in [Compression Method] under [File Format], you can select a compression method from [MH] and [MMR] under [Black & White Pages].
 - If you select [PDF] and then select [Manual Select] in [Compression Method] under [File Format], you can select a compression method from [MH], [MMR], [JBIG2 Arithmetic Encoded], and [JBIG2 Huffman Encoded] under [Black & White Pages], and one from [JPEG] and [Flate] under [Grayscale/Color Pages]. Selecting [Flate] saves the image data with higher compression than [JPEG].
 - You cannot retrieve grayscale or color images in uncompressed (Raw) format.

■MRC High Compression

Allows you to save PDF, DocuWorks, and XPS files with high compression.

- Important If you use the E-mail or Scan to PC service to scan a document with [MRC High Compression] enabled, the image quality of the scanned data may differ from when you use CentreWare Internet Services to retrieve the scanned data from a folder with [MRC High Compression] enabled.
 - DocuWorks 5.0.x and earlier versions (including trial version) do not support highcompressed DocuWorks files.
- Note
- To browse or print DocuWorks files on a computer, one of the following software is required:
 - DocuWorks 6.0 or later
 - DocuWorks Viewer Light 5.1 or later
 - DocuWorks Viewer Light for Web 5.1 or later
- This feature is available when [Color Scanning] is set to [Auto Detect], [Color], or [Grayscale], when [Resolution] is set to [200 dpi] or [300 dpi], and when [File Format] is set to [PDF], [DocuWorks], or [XPS].
- This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Scan

Searchable Text

Allows you to select whether to perform character recognition in PDF and DocuWorks files. When [Searchable Text] is set to [Searchable], the following settings are available.

Setting	ltem	Compr	n [MRC High ression] is Set to [Off]	When [MRC High Compression] is Set to [On]
E-mail/Store to Folder/Network Scanning/	Color Scanning	Black & V Auto Dete Grayscal	ect, Color,	Auto Detect, Color, Grayscale
Scan to PC/ Store & Send Link/	Original Type	Photo &	Text, Text	
Store to USB	File Format	PDF, Do	cuWorks	
Advanced Settings	Color Space ^{*1}	sRGB		
Layout Adjustment	Resolution	200 dpi, 3	300 dpi	
	Reduce/ Enlarge	100% Note	• [Auto %] is not su	upported.

*1 [Color Space] may not appear for some models, or may not appear on the screen depending on the setting made in System Administration mode. For more information, refer to "5 Tools" > "Scan Service Settings" > "Other Settings" > "Color Space" in the Administrator Guide, and "Color Space (Specifying the Color Space)" (P.303).

■Specific Color

Allows you to scan documents containing a small number of colors and save the scanned data with compression. Selecting this check box enables the file size to be smaller than selecting [MRC High Compression].

- Note
- This feature is available when [Color Scanning] is set to [Color], when [Resolution] is set to [200 dpi] or [300 dpi], and when [File Format] is set to [PDF] or [DocuWorks].
- To browse or print DocuWorks files on a computer, one of the following software is required:
 - DocuWorks 6.0 or later
 - DocuWorks Viewer Light 5.1 or later
 - DocuWorks Viewer Light for Web 5.1 or later
- This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Add Thumbnail

Allows you to attach thumbnails to DocuWorks and XPS files when [DocuWorks] or [XPS] is selected. A thumbnail is a reduced, small file size image that helps you check the file contents.

■Single File for Each Page

Saves each page as a single file in the specified format.

• When you use the Store to Folder, Job Flow Sheets, or Network Scanning service, files cannot be split.

■PDF Security

Displays the [File Format - PDF Security] screen.

Allows you to configure security on the data saved as a PDF file to prevent unauthorized access.

Refer to "[File Format - PDF Security] Screen" (P.273).

■PDF Signature

Displays the [File Format - PDF Signature] screen.

Enables detecting alterations in a file by adding a visible signature to the file. Also prevents impersonation of the sender.

To verify the signature with Adobe Acrobat, select [Digital Signatures] under [Preferences] on Acrobat, and then select the following option for [When Verifying].

- Acrobat 6.0.x : Windows Digital Certificate Security
- Acrobat 7.0.x : Adobe Default Security
- Acrobat 8.0.x : Adobe Default Security
- Off

No visible signature is added.

• On

Adds a visible signature using the certificate of the machine.

· Signature Location

Select the position where the signature is displayed when you select [On] in [PDF Signature].

When you select [Invisible Signature], an invisible signature is added using the certificate of the machine.

- **Note** The certificate of the machine is used for the PDF digital signature. A user certificate cannot be used for the digital signature.
 - This feature is supported only by the ApeosPort series.

■Optimize For Quick Web View

Optimizes the PDF file so that it is displayed faster on a web browser.

■DocuWorks Security

Displays [File Format - DocuWorks Security] screen.

Allows you to configure security on the data saved as a DocuWorks file to prevent unauthorized access.

Refer to "[File Format - DocuWorks Security] Screen" (P.275).

DocuWorks Signature

Displays the [File Format - DocuWorks Signature] screen.

Enables detecting alterations in a file by adding a visible signature to the file. Also prevents impersonation of the sender.

• Off

No visible signature is added.

• On

Adds a visible signature using the certificate of the machine.

Signature Location

Select the position where the signature is displayed when you select [On] in [DocuWorks Signature].

- **Note** The certificate of the machine is used for the DocuWorks digital signature. A user certificate cannot be used for the digital signature.
 - This feature is supported only by the ApeosPort series.

■XPS Signature

Displays the [File Format - XPS Signature] screen.

Enables detecting alterations in a file by adding a visible signature to the file. Also prevents impersonation of the sender.

• Off

No visible signature is added.

• On


Adds a visible signature using the certificate of the machine.

Note • This feature is supported only by the ApeosPort series.

[File Format - Searchable Text] Screen

Allows you to select whether to perform character recognition in PDF and DocuWorks files.

1 Select any option.

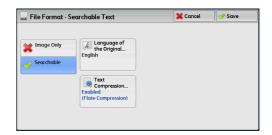

■Language of the Original

Allows you to select a language to identify the text in the original document.

• This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

Text Compression

Note

Allows you to select whether to compress the text areas of the document when using the Searchable Text feature.

Important • Note the following when [Searchable Text] is set to [Searchable].

- When the text in the document is small (10 points or smaller), scan the document with high resolution (300 dpi).
- Color scanning is recommended when the document has outlined white text, or when it has text placed on a dark background.
- If you use the E-mail or Scan to PC service to scan a document with both [MRC High Compression] and [Searchable Text] enabled, the recognition rate of the scanned data may differ from that of the data retrieved from a folder with both [MRC High Compression] and [Searchable Text] enabled, using CentreWare Internet Services.
- In the following cases, the Searchable Text feature may not function properly.
 - If the document is not loaded correctly and thus the text is slanted, or if the text in the document is in different orientations
 - If the text in the document is decorated (italic, hatching, strike-through, etc.)
 - If the document has background patterns or noise
 - If the text in the document is handwritten
- This feature is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

[File Format - PDF Security] Screen

This screen allows you to encrypt a PDF file with a password, and assign the access privileges for file operation.

1 Select any option.

	Encryption Algorithm	Supported Version	
The	128-bit RC4	Acrobat 5.0 or later	File Open Password (Not Set)
Password	128-bit AES	L	(Not Set)
			Permissions
			No Restrictions

■Off

The file is not encrypted, and no access privilege is assigned.

■Password

Encrypts the file using a password.

Encryption Algorithm

Allows you to specify the encryption method.

• 128-bit RC4

Encrypts the file by the 128-bit RC4 method. Files encrypted by this method can be opened with $Adobe^{\ensuremath{\mathbb{R}}}$ Acrobat[®] 5.0 or later.

- Important When the 128-bit RC4 method is used to encrypt a file, and [PDF Signature] is selected, files can be opened only with Adobe[®] Acrobat[®] 6.0 or later.
- 128-bit AES

Encrypts the file by the 128-bit AES method. Files encrypted by this method can be opened with $Adobe^{\ensuremath{\mathbb{R}}}$ Acrobat[®] 7.0 or later.

Supported Version

Displays the supported versions of Adobe[®] Acrobat[®] for encryption.

File Open Password

Displays the [PDF Security - File Open Password] screen.

If you select [On] and set a password, the password is required to open the file.

You can enter a password with up to 32 characters.

Permissions

Displays the [PDF Security - Permissions] screen. Refer to "[PDF Security - Permissions] Screen" (P.274).

[PDF Security - Permissions] Screen

This screen allows you to assign access privileges to a file.

1 Select [Permissions].

法 File Format	- PDF Security		🛷 Save
	Encryption Algorithm	Supported Version	
Off	128-bit RC4	Acrobat 5.0 or later	File Open Password (Not Set)
Password	128-bit AES	· · · · · · · · · · · · · · · · · · ·	(NOT SEC)
			Permissions.
			No Restrictions
PDF Securi	tv - Permissions	💥 Car	cel 🔗 Save
PDF Securit	ty - Permissions	Car	cel 🛛 🖉 🧭 Save

Not Allowed

Not Allowed

Not Allowed

Allowed

- **2** Select [Security Password].
- **3** Select [On].
- 4 Enter the security password, and select [Save].
- 5 Likewise, re-enter the security password, and select [Save].
- 6 Select any option.

Security Password

Displays the [PDF Security - Security Password] screen.

Allows assigning access privileges to files. A password is required to change the access privileges or to perform unauthorized operations.

2. Printing

3. Changes Allowed

4. Allow Contents Copying and Extraction

5. Text Editing by Screen Reader

You can enter a password with up to 32 characters.

■Printing

Displays the [Permissions - Printing] screen. Specify whether to allow printing the file. If allowed, select the print resolution.

Changes Allowed

Displays the [Permissions - Changes Allowed] screen.

Specify whether to allow changing the file contents, such as inserting pages or adding notes.

Allow Contents Copying and Extraction

Displays the [Allow Contents Copying and Extraction] screen. Specify whether to allow copying the file contents, such as text and images.

Text Editing by Screen Reader

Displays the [Text Editing by Screen Reader] screen.

Select [Allowed] to use application software, such as a screen reader, that reads out PDF documents for the visually handicapped.

[File Format - DocuWorks Security] Screen

This screen allows you to encrypt a DocuWorks file with a password, and assign the access privileges for file operation.

1 Select any option.

	Encryption Algorithm	Restricted Operations	
Off	56-bit DES	No File Editing	Open Password (Not Set)
Password (V4 Compatible)		No Annotation Editing	
Password (V4 Incompatible)		No Printing	Full Access Password (Not Set)
Digital Certificate (V4 Incompatible)		No Copying	

■Off

The file is not encrypted, and no access privilege is assigned.

■Password (V4 Compatible)

Encrypts the file by the 56 bit DES method using a password. Files encrypted by this method can be opened with DocuWorks Ver. 4.0 or later. Select [Open Password] to set a password.

Password (V4 Incompatible)

Encrypts the file by the 128 bit AES method using a password. Files encrypted by this method can be opened with DocuWorks Ver. 5.0 or later. Select [Open Password] to set a password.

Digital Certificate (V4 Incompatible)

Encrypts the file by the 128 bit AES method using a certificate. Files encrypted by this method can be opened with DocuWorks Ver. 5.0 or later. Select [Certificate] to set a certificate.

- Important If you encrypt a file using a certificate without Basic Constraints, you cannot use DocuWorks Ver. 5.0.1 and Ver. 6.0.1 to open the file. To use such certificates, use DocuWorks Ver. 5.0.2, or Ver. 6.0.2 or later.
- Note
- This feature is supported only by the ApeosPort series.
 - When you select [Full Access Password] or [Open Password] in [Digital Certificate (V4 Incompatible)], the same certificate name may be redundantly displayed in [Security Settings] of a DocuWorks document to be generated, in the following conditions. However, this does not affect the operation.
 - When you created a job flow on the machine, the same certificate was selected redundantly.
 - The certificate data was obtained from an LDAP server, and the same certificate was selected redundantly.

Encryption Algorithm

Displays the encryption methods.

Restricted Operations

Select file operations to assign access privileges. When assigning access privileges, set [Full Access Password].

Open Password

Displays the [DocuWorks Security - Open Password] screen.

If you select [On] and set a password, the file is encrypted. To open the file, the password is required. The access privileges set in [Restricted Operations] are assigned.

You can enter a password with up to 32 characters.

Full Access Password

Displays the [DocuWorks - Full Access Password] screen.

If a password is set, the password is required to change the access privileges set in [Restricted Operations].

You can enter a password with up to 32 characters.

■Certificate

Note

Displays the [DocuWorks Security - Certificate] screen.

Note • This feature is supported only by the ApeosPort series.

Refer to "[DocuWorks Security - Certificate] Screen" (P.276).

[DocuWorks Security - Certificate] Screen

This screen allows you to specify parties to whom the encrypted file is disclosed, and addresses to which privileges are assigned.

- You can specify up to 50 parties to whom the encrypted file is disclosed, on the [DocuWorks Security - Certificate] screen.
 - This feature is supported only by the ApeosPort series.

List all public entries

Displays the local address list.

Search Public

Searches recipients in the local address list.

Search Network

Searches recipients in the remote address list.

• To display [Search Network], prior settings are required in System Administration mode.

[]] button

Displays the [Certificate Details] screen.

Certificate information, such as issuer, expiration date, and persons to whom the certificate is issued, is displayed.

Name/E-mail Address/DN

Lists names and e-mail addresses.

■Add

Select this button to add the certificate as one of the certificates of persons who are allowed to open the file.

Grant full access to this file

Configure certificates of persons who are allowed to change access privileges including editing or operating the file (full access).

Network Scanning

This section describes the procedure to select features on the [Network Scanning] screen. On the [Network Scanning] screen, you can scan documents after selecting a file (job template) which specifies the scanning conditions, information on the forwarding destination server, and other settings.

This feature creates job templates on a computer using CentreWare Internet Services. Scanned data is converted to the format specified in a job template, and is automatically sent to a server. The machine allows you to automatically retrieve job templates stored in a server. The following describes features available on the [Network Scanning] tab.

- Note
 If characters not supported by the machine are used in names or descriptions of job templates, the characters will not be displayed or will be garbled on the screen. For information on characters available for use, refer to "16 Appendix" > "Notes and Restrictions" > "Notes and Restrictions on the Use of the Machine" in the Administrator Guide.
 - This service is supported only by the ApeosPort series.

When the Scan to Home feature is enabled, and when the Remote Access feature is available, the scanned document can be transferred to a different destination according to an authenticated user.

Important • When using the Scan to Home feature in a computer environment with operating systems earlier than Windows 98/NT, a destination user name in the earlier format (domain name\user name) will not be determined automatically. Before scanning, change the user name with which you can log in correctly.

• You can configure the Scan to Home feature from CentreWare Internet Services.

For information on how to use CentreWare Internet Services, refer to the help of CentreWare Internet Services.

- **1** Select [Network Scanning] on the [Services Home] screen.
- **2** Select a job template, and then select a feature on the [Network Scanning] screen.

Network Scanning	Store & Send Link	Store to USB	Language Screen Brightness
E Media Print		Job Flow Sheets	Setup
-Text			Activity Repo
	wsp	a	Fax Receivin Mode
	Store to WSD	Web Applications	Print Mode

Network Scanning	Advanced Settings	Layout Adjustment	Filing Options	
001 Name1				Go to 001 ↔ 501
002 @Name2				
003 Name3				I Template Description
004 Name4				Update Templates
005 @Name5				Preview
Color Scanning Black & White	2 Si Sca 1 Sided	nning 🔺	Original Type ext	File Format

■Job Template

Select a job template for the scan job.

 DEFAULT - This is the default job template. This template is used as a base template when a new template is created on CentreWare Internet Services. This template cannot be deleted. It can be edited and returned to the factory-default template only by the system administrator. @S2HOME - This is the template for the Scan to Home feature. Selecting this template verifies a user and sends scanned data to the folder prespecified for the user.

Note

- The job template "@S2HOME" is displayed only when remote authentication is enabled, and [Enabled] is also selected in [Status] under [Properties] > [Services] > [Scan to Home] on CentreWare Internet Services.
 - The job template name "@S2HOME" can be changed by the system administrator from CentreWare Internet Services.

For information on how to use CentreWare Internet Services, refer to the help of CentreWare Internet Services.

■Go to

Use the numeric keypad to enter a 3-digit job template number. The job template then appears at the top of the list.

Template Description

Displays the [Template Description] screen on which you can view the description of the job template. This button is displayed only when a description has been added to a job template.

■Update Templates

Refreshes the information. If a created job template has not been displayed, selecting [Update Templates] will display the job template.

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document. For more information, refer to "Preview (Previewing the Scanned Images during a Scan Job)" (P.264).

Color Scanning (Selecting an Output Color)

You can set the output color to scan a document. For more information, refer to "Color Scanning (Selecting an Output Color)" (P.265).

2 Sided Scanning (Scanning Both Sides of a Document)

You can automatically scan both sides of a 2-sided document. By setting the binding style, both sides are scanned in the same orientation. For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Original Type (Selecting the Document Type)

You can select the type of the document. For more information, refer to "Original Type (Selecting the Document Type)" (P.267).

File Format (Selecting a File Format for Output Data)

You can select a file format for output data.

For more information, refer to "File Format (Selecting a File Format for Output Data)" (P.267).

Scan to PC

This section describes the procedure to select features on the [Scan to PC] screen. The Scan to PC service allows you to scan documents and send the scanned data to a network computer via the FTP or SMB protocol. The following describes features available on the [Scan to PC] tab. The following shows the reference section for each feature.

Transfer Protocol (Selecting a Transfer Protocol)	. 279
Address Book (Specifying a Destination PC Using the Address Book)	. 280
Browse (Specifying a Destination PC by Browsing Your Network)	. 281
Specifying a Destination (Specifying a Destination PC Using the Screen Keyboard)	282


Before scanning, you must create a shared folder on your computer to save scanned data in. Furthermore, if you use the FTP protocol, you must set the FTP service. For information on the computer settings, refer to the documentation provided with your operating system. For information on supported operating systems, refer to "16 Appendix" > "Specifications" in the Administrator Guide.

You can customize the layout of the features displayed on the [Scan to PC] screen. For more information, refer to "5 Tools" > "Scan Service Settings" > "First Tab" in the Administrator Guide.

1 Select [Scan to PC] on the [Services Home] screen.



- **2** Select a feature on the [Scan to PC] screen.
 - Note Fields displayed on the screen vary depending on the protocol you have selected.



Transfer Protocol (Selecting a Transfer Protocol)

You can select a transfer protocol using the following procedure.

1 Select [Transfer Protocol].

	dvanced Settings	Layout Adjustment	Filing Options	
Transfer Protocol	Server			
Address Book	Shared Nam			
Browse	User Name			
Preview	Password			
Color Scanning Black & White	2 Side Scann 1 Sided	ing 🔺	Original Type	File Format

2 Select any option.

FTP SMB	Changing the protocol will delete the specifie storage location in which the scanned files wil be saved.
SMB (UNC Format)	

■FTP

Transfers data using the FTP protocol.

■SMB

Transfers data using the SMB protocol.

SMB (UNC Format)

Transfers data using the SMB protocol (UNC Format).

UNC stands for Universal Naming Convention and its format is as follows: \\host name\shared name\directory name

Address Book (Specifying a Destination PC Using the Address Book)

You can specify the server name, the name of the user who can decrypt encrypted files, and other information from the Address Book.

For information on how to set the Address Book, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

1 Select [Address Book].

Scan to PC	Advanced Settings	Layout Adjustment	Filing Options	
Transfer Protocol	Server			
Address Book	Shared Na	me		
Browse	User Name			
Preview	Password			
Color Scanning Black & White	2 Sic Scar 1 Sided	ning 🔺	Original Type	File Format

2 Select the destination to store the data in.

Server Ado		🥜 Close		
Name	Protocol	Go to	Save in	
0001 Svr Addre	ss Name1 FTP	Add →		
0002 Svr Addre	ss Name2 SMB		Address User Name:	
0003 Svr Addre	ss Name3 FTP		Protocol: SMB Save in:	
0004 Svr Addre	ss Name4 SMB			
0005 Svr Addre	ss Name5 FTP	•		

3 Select [Add].

Important • You can only use destinations configured for SMB or FTP.

Note • Select [\blacktriangle] to return to the previous screen or [\triangledown] to move to the next screen.

■Name, Protocol

Lists recipient names and protocols.

■Add

Adds the selected recipient to the [Save in] box.

Scan

5

■Save in

Displays the selected recipient.

■Go to

Enter a recipient number using the numeric keypad to display the recipient at the top of the list.


■[1] button

Allows you to confirm information, such as [Name] and [Server Name/IP Address], on the screen displayed.


Browse (Specifying a Destination PC by Browsing Your Network)

This feature displays a hierarchy consisting of server names and folders. You can specify a save destination by tracing the hierarchy.

1 Select [Browse].



Important • You can specify recipients for SMB only.

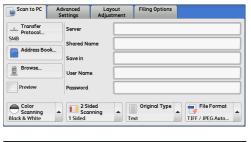

🚊 Browse		💢 Cance	el 🥜 Save
Save in	\\3\4		
0		 A	Add to Address Book
i 🔁 1			
2			
<u>></u> 3			1 Previous
6 4		•	Vext
C			()

Save in

Shows the current location in the hierarchy.

Add to Address Book

Displays the [Add to Address Book] screen. Refer to "[Add to Address Book] Screen" (P.282).

Previous

Allows you to move to the upper directory.

Note • This button is grayed out if there is no upper directory.

■Next

Allows you to move to the lower directory.

Note • This button is available when a folder is selected.

[Add to Address Book] Screen

This screen allows you to register the save destination specified in [Browse], in the Address Book.

1 Select [Add to Address Book].

🔨 Add to Address Book		💢 Cancel 🛛	> Sαve
Address:	0001 🔀 Edit		
Name:	(Not Set)		
Server Name:	3		1/3
Shared Name:	4		-
Save in:			

2 Select [Save].

Address

To change the address number, select [Edit] and then the desired number.

■Name

Note

To change the recipient name, enter a new name with the keyboard displayed by selecting [Name].

Note • The recipient name may not be displayed depending on the settings.

Specifying a Destination (Specifying a Destination PC Using the Screen Keyboard)

Enter information in the fields provided for the selected protocol, to specify a forwarding destination.

- **1** Select the item to be set.
 - You can also select [Address Book] to enter information.
 - Fields displayed on the screen vary depending on the selected protocol.

Scan to PC	Advanced Settings	Layout Adjustment	Filing Options	te and the set of the sector and the sector of the sector
Transfer Protocol SMB	Server Shared No	ame]
Address Book	c Save in			
	User Nam	e		
Preview	Password			
Color Scanning Black & White	2 Sided	nning 🔺	Original Type	File Format

🥜 Save

_____ · ____

фи иф

Shift

Delete Text

2 Enter information using the keyboard displayed on the screen.

For information on how to enter characters, refer to "Entering Text" (P.68).

• To delete characters, select [Backspace].

	Server Cance	ι
er to	· 1 2 3 4 5 6 7 8 9 0 ·	
	v q w e r t y u i o p	
space].	asdfghjkl;	
	Shift z x c v b n m , .	

Space

More Characters

■Server

This option is displayed when you select [FTP] or [SMB] in [Transfer Protocol]. Enter a server name or IP address. When the save location is in the DFS namespace on Windows, enter a domain name or server name. Up to 64 characters are allowed.

The following are examples:

• For [FTP]:

Server name: myhost.example.com (myhost: host name, example.com: domain name) IP address: 192.168.1.100 • For [SMB]:

Server name: myhost

IP address: 192.168.1.100

Shared Name

This option is displayed when you select [SMB] in [Transfer Protocol]. Enter a shared name. When the save location is in the DFS namespace on Windows, enter a root name. Up to 64 characters are allowed.

■Save in

This option is displayed when you select [FTP] or [SMB] in [Transfer Protocol]. Enter a directory path. When the save location is in the DFS namespace on Windows, enter a folder name. Up to 128 characters are allowed.

• The folder name is the same as the link name for Windows Server 2003.

• For [FTP]:

Example: mydoc/Scan

• For [SMB]:

Example: mydoc\Scan

Save in

This option is displayed when you select [SMB (UNC Format)] in [Transfer Protocol]. Enter the following directory path: "\\Host Name\Shared Name\Directory Name". When the save location is in the DFS namespace on Windows, enter "\\Domain Name\Root Name\Folder Name" or "\\Server Name\Root Name\Folder Name". Up to 260 characters are allowed.

■User Name

Enter the user name of the computer you are forwarding to. When a user name is not required for the destination, this field can be skipped.

When you select [FTP] in [Transfer Protocol], up to 97 characters are allowed.

When you select [SMB] in [Transfer Protocol], use one of the following formats:

- · For Active Directory:
 - User name@Domain name

(user name: up to 32 characters, domain name: up to 64 characters)

Example: fuji@example.com (fuji: user name, example.com: domain name)

• For Windows NT Domain:

Domain name\User name (domain name: up to 64 characters, user name: up to 32 characters)

Example: example\fuji (example: domain name, fuji: user name)

· For workgroups:

Local user (up to 32 characters)

Example: Fuji-Taro

■Password

Enter the password for the user name. Up to 32 characters are allowed.

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document. For more information, refer to "Preview (Previewing the Scanned Images during a Scan Job)" (P.264).

Color Scanning (Selecting an Output Color)

You can set the output color for scanning a document. For more information, refer to "Color Scanning (Selecting an Output Color)" (P.265).

2 Sided Scanning (Scanning Both Sides of a Document)

You can automatically scan both sides of a 2-sided document. By setting the binding style, both sides are scanned in the same orientation. For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Original Type (Selecting the Document Type)

You can select the type of the document. For more information, refer to "Original Type (Selecting the Document Type)" (P.267).

File Format (Selecting a File Format for Output Data)

You can select a file format for output data.

For more information, refer to "File Format (Selecting a File Format for Output Data)" (P.267).

Store to Folder

This section describes the procedure to select features on the [Store to Folder] screen. You can scan documents and save the scanned data in a folder on the machine.

The following describes features available on the [Store to Folder] tab.

Note

- When [Store to Folder] is selected, [File Format] is disabled.
 - When you use CentreWare Internet Services to retrieve a file from a folder, you can set [Searchable Text] if all scanned images of the file in the folder are set as follows:
 - Image Size: 15 x 15 mm to 309 x 432 mm
 - Color Scanning: Auto Detect, Color, Grayscale, Black & White
 - Original Type: Photo & Text, Text
 - Color Space: sRGB
 - Resolution: 200dpi, 300dpi
 - Reduce/Enlarge: 100%

You need to create a folder in advance. For more information on how to create a folder, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide.

You can customize the layout of the features displayed on the [Store to Folder] screen. For more information, refer to "5 Tools" > "Scan Service Settings" > "First Tab" in the Administrator Guide.

1 Select [Store to Folder] on the [Services Home] screen.



2 Select a feature on the [Store to Folder] screen.

- Note
- If a passcode is set for the folder, the passcode entry screen may appear. Enter the passcode and select [Confirm]. If you have forgotten the passcode, set the folder passcode in System Administration mode again.



■Folder

Select a folder to save the scanned data in.

• Select [▲] to return to the previous screen or [▼] to move to the next screen.

■Go to

Use the numeric keypad to enter a 3-digit folder number. The folder then appears at the top of the list.

■File List

Select a folder and then select this button to display the [File List] screen. You can confirm or delete files stored in the folder.

Color Scanning (Selecting an Output Color)

You can specify the output color to scan a document. For more information, refer to "Color Scanning (Selecting an Output Color)" (P.265).

2 Sided Scanning (Scanning Both Sides of a Document)

You can automatically scan both sides of a 2-sided document. By setting the binding style, both sides are scanned in the same orientation. For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Original Type (Selecting the Document Type)

You can select the type of the document. For more information, refer to "Original Type (Selecting the Document Type)" (P.267).

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document. For more information, refer to "Preview (Previewing the Scanned Images during a Scan Job)" (P.264).

Store to USB

This section describes the procedure to select features on the [Store to USB] screen. The Store to USB service allows you to scan documents and save the scanned data to a USB memory device. The following describes features available on the [Store to USB] tab.

Save in (Specifying a Storage Location in the USB Memory Device)	290
Details (Displaying the Details of a Storage Location in the USB Memory Device)	291
Preview (Previewing the Scanned Images during a Scan Job)	292
Color Scanning (Selecting an Output Color)	292
2 Sided Scanning (Scanning Both Sides of a Document)	292
Original Type (Selecting the Document Type)	292
File Format (Selecting a File Format for Output Data)	292

- Important Before removing the USB memory device, make sure that the screen indicating that data is being transferred is not displayed. If you remove the USB memory device while data is being stored, the data in the device may be damaged. You can also view the [Job Status] screen to confirm if the data has been stored to the USB memory device.
- **Note** This feature may not be available depending on the setting in CentreWare Internet Services. For more information, refer to "6 CentreWare Internet Services Settings" > "Configuring Machine Settings Using CentreWare Internet Services" in the Administrator Guide.
 - An optional component is required to use this service. For more information, contact our Customer Support Center.
 - A USB memory device encrypted with software is not supported.
 - The following USB memory devices can be used:
 - A formatted USB memory device
 - A USB 2.0 compliant memory device (USB 1.1 is not supported.)
 - A USB memory device with a storage capacity of up to 128 GB
 - You can use a commercially available single-slot^{*1} Memory Card Reader, but the operation is not guaranteed. When you use a multi-slot^{*2} Memory Card Reader, only one of those slots can be recognized. The slot to be used differs depending on the card readers. Some of the media and slots of Memory Card Readers may not be used on the machine, and the operation is not guaranteed.
 - *1: Media/Memory Card Reader that has one slot. Some allow only one type of media/ Memory Card, while others allow more than one types (ex. SD card, xD-Picture Card).
 - *2: Media/Memory Card Reader that has two or more slots.

You can customize the layout of the features displayed on the [Store to USB] screen. For more information, refer to "5 Tools" > "Scan Service Settings" > "First Tab" in the Administrator Guide.

- **1** Insert the USB memory device into the USB memory slot on the control panel.
- **2** One of the following occurs.
 - The [USB Device Detected] screen appears.
 - The [Store to USB] screen appears.
 - The [Media Print Text] screen appears.
 - The screen display does not change.


Note

- The behavior depends on the settings. Ask your system administrator for more information.
 - When a USB memory device is inserted into the USB memory slot during Energy Saver mode, the touch screen does not light up. After exiting Energy Saver mode by pressing the <Energy Saver> button, insert the USB memory device again or select the [Store to USB] on the [Services Home] screen. For information on other ways to exit Energy Saver mode, refer to "Exiting Energy Saver Mode" (P.58).

- The screen status will be one of the above even when a USB memory device in which only encrypted data is stored is inserted or a USB memory device in unsupported format is inserted. In such cases, a warning message appears during operation and the operation is aborted.
- The screen status will be one of the above when a commercially available Memory Card Reader is inserted into the USB memory slot of the machine. It is the same if no media is inserted into the Memory Card Reader.
- If a commercially available Memory Card Reader is used and left inserted all the time, the machine will not detect media even when it is inserted into the slot of the Memory Card Reader.
- The screen display remains the same when the inserted USB memory device or Memory Card is removed. Press the <Services Home> button or perform another operation to change the screen display before starting the next operation.

When the [USB Device Detected] Screen Appears

1 Select [Store to USB].

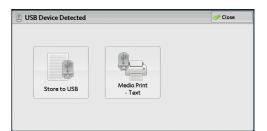

2 The [Store to USB] screen appears.

Store to USB	Advanced Settings	Layout Adjustment	Filing Options	
Save in	/			
				i Details
Preview			Space Available	: 62.0MB (Out of 62.0MB)
Color Scanning Black & White	2 Si Sca 1 Sided	nning 🔺 🛛	Original Type	File Format

When the [Store to USB] Screen Appears


Select a feature on the [Store to USB] screen.

Store to USB	Advanced Settings	Layout Adjustment	Filing Options	
늘 Sαve in	1			
				i Details
Preview			Space Available	: 62.0MB (Out of 62.0MB
Color	2 Sid		Original Type	File Format

When the [Media Print - Text] Screen Appears

Select All	-	Name	Last Updated	
Select From	001	IMAGE_1.JPG	2011/04/8 19:02	
List Select Range	002	IMAGE_2.JPG	2011/04/8 19:02	
select kunge	003	IMAGE_3.JPG	2011/04/8 19:02	
Index Print				v

1 Press the <Services Home> button.



2 Select [Store to USB] on the [Services Home] screen.


3 The [Store to USB] screen appears.



Store to USB	Advanced Settings	Layout Adjustment	Filing Options	
Save in	/			
				Details
			Space Availab	le: 62.0MB (Out of 62.0MB)
Preview			Space Avalia.	Re. 02.0MD (Out of 02.0MD)
Color Scanning Black & White			Original Type ext	File Format

When the Screen Display Does Not Change


1 If any screen other than the [Services Home] screen is displayed, press the <Services Home> button.



2 Select [Store to USB] on the [Services Home] screen.



3 The [Store to USB] screen appears.

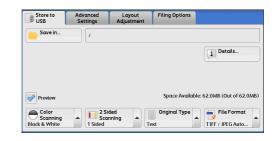

- Important Data stored in a USB memory device may be lost or damaged in the following cases. Make sure to back up the data in the device before use.
 - When ejecting the medium or switching the power off/on by methods other than those described in this guide.
 - When receiving the effect of electrical noise or an electrical discharge
 - When a failure occurs or repairing
 - When receiving damage resulting from a natural disaster
 - We assume no responsibility for any direct or indirect damages arising from or caused by such data loss.
- If you do not specify the file storage location, the scanned data is saved in the root directory.

Save in (Specifying a Storage Location in the USB Memory Device)

You can specify a file storage location in the USB memory device.

1 Select [Save in].

Store to USB	Advanced Settings	Layout Adjustment	Filing Options	
👝 Sαve in	/			
				Details
Preview			Space Availo	able: 4.5MB (Out of 5.3M
Color Scanning		ided Inning	Original Type	File Format

2 Select a folder to save the data in.

<mark>ο</mark> Sαve in		💢 Cancel	🛷 Save
/SCAN_001/			
Name	Last Updated		
🗁 SCAN_001	2011/1/26 11:32	*	
📄 SCAN_002	2011/1/26 11:32		
📄 SCAN_003	2011/1/26 11:32		
📄 SCAN_004	2011/1/26 11:32		1 Previous
CAN_005	2011/1/26 11:32	v	C Next

Note

• Select [▲] to return to the previous screen or [▼] to move to the next screen.

- You can sort the order of folders displayed in ascending or descending order by selecting [Name] or [Last Updated].
- Up to 900 folder names can be displayed in the list of [Save in]. File names are not displayed.
- If a folder or file name has more than 170 characters, the folder or file name is not displayed.
- Folders in the DCIM folder of digital cameras cannot be displayed. You cannot save files in these folders either.
- Folder names which include characters that the machine does not support may not be correctly displayed. If you specify the folders as file storage locations, an error will occur. For more information on characters that the machine supports, refer to "Entering Text" (P.68).
- The machine does not distinguish between upper and lower cases of folder and file names that are created in a Windows environment and that consist of eight characters or less. The names for these folders and files are displayed in capital letters.

Scan 5

- If a full path (a string of folder and file names in all directories) of the file created exceeds 257 characters, an error occurs.
- **3** Select [Save].

🔁 Sαve in		💢 Cana	el 🥜 Save
/SCAN_001/			
Name	Last Updated		
C SCAN_001	2011/1/26 11:32		
CAN_002	2011/1/26 11:32		
CAN_003	2011/1/26 11:32		
CAN_004	2011/1/26 11:32		1 Previous
CAN_005	2011/1/26 11:32	v	C Next

■Previous

Allows you to move to the upper directory.

Note • This button is grayed out if there is no upper directory.

■Next

Allows you to move to the lower directory.

Note • This button is available when a folder is selected.

Details (Displaying the Details of a Storage Location in the USB Memory Device)

Selecting [Details] displays the [Details] screen.

[Details] Screen


3

This screen displays the folder directory in the USB memory device.

1 Specify the folder directory, and then select [Save].

The folder and file names in all directories to

be saved are displayed.

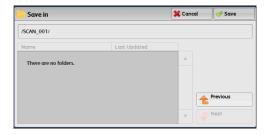

2 Select [Details].

		iling Options		Laya Adjust	vanced attings	Store to USB
tails	Dete				/	Save in
:aits	i Deto					
(Out of 5.3MB)	able: 4.5MB (C	Space Avail				Preview
EG Auto	TIFF / JPE	Original Type	Text		2 Sic Scar 1 Sided	Color Scanning ack & White
🏈 Close	4					Details
)_01/	_001/201	002/imag	/SCAN_	ave in:
)_01/	_001/201	002/imag	/SCAN_	ave in:

Scan

5

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document. For more information, refer to "Preview (Previewing the Scanned Images during a Scan Job)" (P.264).

Color Scanning (Selecting an Output Color)

You can set the output color to scan a document. For more information, refer to "Color Scanning (Selecting an Output Color)" (P.265).

2 Sided Scanning (Scanning Both Sides of a Document)

You can automatically scan both sides of a 2-sided document. By setting the binding style, both sides are scanned in the same orientation. For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Original Type (Selecting the Document Type)

You can select the type of the document. For more information, refer to "Original Type (Selecting the Document Type)" (P.267).

File Format (Selecting a File Format for Output Data)

You can select a file format for output data.

For more information, refer to "File Format (Selecting a File Format for Output Data)" (P.267).

Store & Send Link

Note

If an authenticated user scans a document, the machine temporarily saves the scanned data, and automatically obtains the user's e-mail address that was registered in advance. Then, the machine sends an e-mail to the user to notify two URLs: one for the location to retrieve the scanned data, and the other for the location to delete the data.

Only the authenticated user who is logged in to the machine can be the recipient of an e-mail transmission. The machine cannot send e-mails to multiple recipients.

After receiving the e-mail on a computer, the user can retrieve the scanned data using a web browser.

The following describes features available on the [Store & Send Link] tab.

- Important The scanned data stored in the machine will be automatically deleted when the retention period expires. This retention period can be specified in [URL File Expiration] by the System Administrator in the range of 1 to 168 hours. The default value is 3 hours. The files are always deleted automatically.
 - To strengthen security, after retrieving the scanned data, access the URL to delete the scanned data stored in the machine.
 - The Store & Send Link service does not provide document management features, such as backing up/restoring files, deleting all data at one time, listing files, and displaying available storage space.
 - The Store & Send Link service allows you to retrieve scanned data without specifying an e-mail address from the Address Book or a folder for each scan job. However, the size of the data and its retention period are restricted on the machine. If you want to avoid these restrictions, use the Scan to PC or E-mail service.

For more information, refer to "5 Tools" > "Scan Service Settings" > "Other Settings" > "Store & Send Link - Maximum File Size" and "URL File Expiration" in the Administrator Guide.

You can customize the layout of the features displayed on the [Store & Send Link] screen. For more information, refer to "5 Tools" > "Scan Service Settings" > "First Tab" in the Administrator Guide.

- **1** Press the <Log In/Out> button on the control panel or select the login information field on the touch screen.
- **2** Enter the user ID.
- **3** Select [Store & Send Link] on the [Services Home] screen.



4 Select a feature on the [Store & Send Link] screen.



Scan To (Displaying the E-mail Address of the Authenticated User)

Automatically obtains the pre-registered e-mail address of the authenticated user.

From (Displaying the E-mail Address of the Authenticated User)

Automatically obtains the pre-registered e-mail address of the authenticated user.

Subject (Setting the Subject)

You can specify the e-mail subject using one of the following procedures.

Auto Set

Automatically sets the subject to [Scan Reference from XXX] (where XXX is the host name of the machine).

■To set a user-defined subject

- 1 Select [Subject].
- **2** Enter a subject with up to 128 characters using the displayed keyboard. For information on how to enter characters, refer to "Entering Text" (P.68).

Message (Entering the E-mail Body)

You can enter the e-mail body using the following procedure.

- 1 Select [Message].
- **2** Enter a message with up to 512 characters using the displayed keyboard. For information on how to enter characters, refer to "Entering Text" (P.68).

Color Scanning (Selecting an Output Color)

You can set the color mode to scan a document. For more information, refer to "Color Scanning (Selecting an Output Color)" (P.265).

2 Sided Scanning (Scanning Both Sides of a Document)

You can automatically scan both sides of a 2-sided document. By setting the binding style, both sides are scanned in the same orientation. For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Original Type (Selecting the Document Type)

You can select the type of the document. For more information, refer to "Original Type (Selecting the Document Type)" (P.267).

Preview (Previewing the Scanned Images during a Scan Job)

You can preview the scanned images while scanning the document. For more information, refer to "Preview (Previewing the Scanned Images during a Scan Job)" (P.264).

File Format (Selecting a File Format for Output Data)

You can select a file format for output data.

The Store & Send Link service allows you to retrieve scanned data from a computer without password authentication.

To prevent other parties from viewing your scan data, select [PDF] or [DocuWorks] in [File Format] and set a password in [PDF Security] or [DocuWorks Security] before scanning the document.

For more information, refer to "File Format (Selecting a File Format for Output Data)" (P.267).

Note • If you select [TIFF/JPEG Auto Select] or the [Single File for Each Page] check box on the [File Format] screen when scanning a document, the file is downloaded in zip format.

Store to WSD

Note

This section describes the procedure to select features on the [Store to WSD] screen. The Store to WSD service allows you to scan documents set on the machine from a network computer. It also allows you to save the scanned data to a network computer.

 [Store to WSD] may not appear on the [Services Home] screen for some models. For more information, refer to "9 Scanner Environment Settings" > "Configuration of Store to WSD" in the Administrator Guide.

- This feature requires the scanner driver included as standard in Windows Vista Service Pack 2 or later. Thus, this feature is not available for computers with older OS.
- Resolution, file format and so on cannot be specified from the control panel of the machine. Specify these settings in [Scan Profiles] of Windows. For more information on how to specify the settings, refer to Windows Help.
- **1** Select [Store to WSD] on the [Services Home] screen.

Network Scanning	Store & Send Link	Store to USB		Language Screen Brightness
Media Print - Text		Job Flow Sheets	2/2	Setup
	USD Store to WSD	Web Applications		Activity Report Fax Receiving Mode Print Mode

2 Select a feature on the [Store to WSD] screen.

Store to WSD	
Start Scan Job From	Place your originals on the scanner. Select "Operate From Computer". At your computer, select this device and start the scan job. Note: Collect your originals after scanning is complete.
	Operate From Computer

Start Scan Job From

Select from where to start a scan job.

Computer

Starts a scan job by sending a request from a network computer.

This Device

Starts a scan job with the scan command from the machine, and save the scanned data to a network computer.

■List of Computers

Lists network computers and their scanning methods. Select one from this list as destination.

Computer (Starting a Scan Job via Computer Operation)

You can scan documents set on the machine by sending a request from a network computer.

Store to WSD Start Scan Job From

Computer

1 Select [Computer].

- 2 Load the document on the document glass or in the document feeder, and select [Operate From Computer].
- 3. At your computer, select this device and start the scan job. This D Note: Collect your originals after scanning is complete Operate From Computer Store to Start Scan Job From 1. Place your originals on the scanne Computer 2. Select "Operate From Computer This Device 3. At your computer, select this device and start the scan job. Note: Collect your originals after scanning is co Operate From 1 Store to WSE There is a scan job waiting to start via computer operati Do not remove the originals placed on the sca

1. Place your originals on the scanne

2. Select "Operate From Computer

Scan L

- **3** The standby screen is displayed on the touch screen.
 - Note
- Select [Delete] button to exit standby mode. After exiting standby mode, [Remove Your Originals] screen is displayed on the touch screen.

ode, en is		Delete
utor To or	orato scan from	a notwork computer

- **4** Operate scan from a network computer. To operate scan from a network computer, use application which supports image loading feature such as [Windows Fax and Scan]. The following describes the method using [Windows Fax and Scan] with Windows 7.
 - Note
 This method is not available for computers with Windows Vista Home Basic or Windows Vista Home Premium. To operate scan from such a computer, use another method, for example, selecting [From Scanner or Camera] in the Paint application.
 - 1) Click the [Start] button, click [All Programs], and then click [Windows Fax and Scan].
 - Click [Scan] at the bottom of the left pane, and then click [New Scan] on the toolbar.
 - 3) In the [New Scan] dialog box, click [Change], and then select the machine.
 - 4) Check that the machine model name is displayed to the right of [Scanner:].
 - Note If the machine model name is not displayed, click [Change] and select the machine.
 - 5) Click the [Profile] list, and then select [Document].
 - 6) Specify the settings as necessary, and then click [Scan].
- **5** After being scanned, the scanned data is forwarded to the specified computer.

Scan

5

6 The [Store to WSD - Remove Your Originals] screen appears on the touch screen after a scan job has been completed. Remove the originals from the document glass or the document feeder, and then click [OK].

Remove your origit complete or if the :	ials have been removed after scanning is Ican job has been deleted.
	OK

Note

- If the standby screen is not displayed, a scan job will not be started even when the network computer recognizes the machine.
 - Select the [Delete] button to abort an operation. After an operation is aborted, the [Store to WSD Remove Your Originals] screen is displayed on the touch screen.
 - The machine will not enter the Energy Saver mode while the standby screen is displayed. For information on Energy Saver mode, refer to "Energy Saver Mode" (P.57).

This Device (Storing Data Scanned by the Machine on a Network Computer)

You can forward the data scanned with the command from the machine to a specified computer on the network.

1 Load the document on the document glass or in the document feeder, and select [This Device].

Store to WSD		0109060000	
Start Scan Job From	List of Computers		
Computer	Scan to Win7enult32		
This Device	Scan for Print to Win7enult32	1	
	Scan for E-mail to Win7enult32	1	
	Scan for Fax to Win7enult32	1	
	Scan for OCR to Win7enult32	1	
		v	i Computer Details

2 Computer names and 5 processing methods are displayed in the [List of Computers]. Select destination from the list in accordance with the intended use.

Store to WSD		
Start Scan Job From	List of Computers	
Computer	Scan to Win7enult32	A
	Scan for Print to Win7enult32	
	Scan for E-mail to Win7enult32	
	Scan for Fax to Win7enult32	
	Scan for OCR to Win7enult32	
	D-	v i Computer Details
	<u>1</u>	

■List of Computers

Lists destination and URL.

- Select from among 5 kinds of processing methods (Scan to PC, Scan for Print to PC, Scan for E-mail to PC, Scan for Fax to PC, Scan for OCR to PC) in accordance with the intended use.
- **3** Press the <Start> button.



- **4** The scanned data will be forwarded to the specified destination.
 - Note Select the [Delete] button to abort scanning.
- **5** Check the forwarded data on the destination computer.

Advanced Settings

This section describes the features you can select on the [Advanced Settings] screen under [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB]. The following shows the reference section for each feature.


Photographs (Scanning a Color Photograph)	.300
Image Options (Adjusting Scan Density and Image Sharpness)	.301
Image Enhancement (Erasing the Background Color of Documents/Adjusting Contrast)	.302
Shadow Suppression (Suppressing the Document Background)	.302
Color Space (Specifying the Color Space)	.303

1 On the [Services Home] screen, select [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB].





- **2** Select a feature on the [Advanced Settings] screen.
 - Note
- To activate [Color Space], a prior setting must be made in System Administration mode. For information on the setting procedure, refer to "5 Tools" > "Scan Service Settings" > "Other Settings" > "Color Space" in the Administrator Guide and "Color Space (Specifying the Color Space)" (P.303).

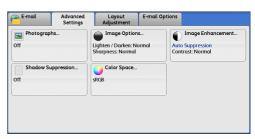

Photographs (Scanning a Color Photograph)

Use this feature when scanning a color photograph.

This feature is available only when [Color Scanning] is set to [Color].

- Important You cannot use the document feeder with this feature.
 - When this feature is enabled, the Shadow Suppression and Background Suppression features cannot be used.

1 Select [Photographs].


2 Select [Enhance Photographs].

E-mail	Advanced Settings	Layout Adjustment	E-mail Optio	ns	
Photographs. Off	-	Image Option Lighten / Darken: N Sharpness: Normal	ormal	Image E Auto Suppres Contrast: Nor	Enhancement. ision mal
Shadow Supp Off	ression	Color Space sRGB			
Photographs	I			Cancel	Save
		Photographs feature enhances the inals which are photographs. dow Suppression and Background S to Off when this feature is selected.		age for files s	

Image Options (Adjusting Scan Density and Image Sharpness)

This feature allows you to adjust the scan density and image sharpness.

1 Select [Image Options].



2 Select any option.

Image Options	*	Cancel	🖉 🔗 Save
Lighten / Darken	Sharpness		
Lighten	•	Sharpe	n
Normal		Normal	
Darken	•	Soften	

■Lighten/Darken

You can select a scan density level from seven levels between [Lighten] and [Darken]. Selecting an upper cell on the bar makes the scan density lighter, and selecting a lower cell makes it darker.

■Sharpness

You can select a sharpness level from five levels between [Sharpen] and [Soften].

Selecting an upper cell on the bar makes the contours of images sharper, and selecting a lower cell makes them softer.

Scan

5

Image Enhancement (Erasing the Background Color of Documents/Adjusting Contrast)


This feature allows you to suppress the background color of a document such as newspaper and colored paper. In addition, when [Color Scanning] is set to [Color] or [Grayscale], you can adjust the contrast.

Off

of

1 Select [Image Enhancement].

2 Set [Background Suppression] and [Contrast].

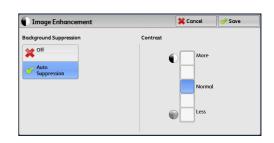

Advanced

Layout Adjustment

Color Space

Image Options... hten / Darken: Norma Image Enhance

Auto Suppression Contrast: Normal

Background Suppression

• Off

Scans the background of documents with no filtering.

• Auto Suppression

When [Color Scanning] is set to [Black & White], the background of a document printed on colored paper, such as newspaper, will be suppressed. When [Color Scanning] is set to [Color], the background of a document printed on white paper will be suppressed.

■Contrast

Allows you to select a contrast level from five levels between [More] and [Less].

Selecting an upper cell on the bar makes the difference between light and dark areas greater; light areas become lighter and dark areas darker. In contrast, selecting a lower cell on the bar makes the difference between light and dark areas smaller.

Shadow Suppression (Suppressing the Document Background)

When you scan a 2-sided document printed on thin paper, this feature allows you to suppress the image and colors on the reverse side of each document page from appearing in the scan image.

This feature is available only when [Color Scanning] is set to [Color] or [Grayscale].

Important • This feature cannot be used with [Photographs].

1 Select [Shadow Suppression].

Photographs Iff Shadow Suppression	Image Opti Lighten / Darken. Sharpness: Norm I RGB	: Normal al	Auto Suppr Contrast: No	
Shadow Suppression	Sharpness: Norm	al		
		e		
] [
Shadow Suppression	on		💥 Cancel	🛷 Save
Off	Shadow Suppression hid bleed-through. This feature is unavailab Color Scanning.			


2 Select [Auto Suppression].

Color Space (Specifying the Color Space)

This feature allows you to set the color space.

- Note [Color Space] is available when [Color Scanning] is set to [Color].
 - To activate [Color Space] on the [Advanced Settings] screen, a prior setting must be made in System Administration mode. For more information, refer to "5 Tools" > "Scan Service Settings" > "Other Settings" > "Color Space" in the Administrator Guide.
 - [Device Color Space] cannot be selected when [Searchable Text] is set to [Searchable] on the [File Format] screen.
- **1** Select [Color Space].

2 Select either [sRGB] or [Device Color Space].

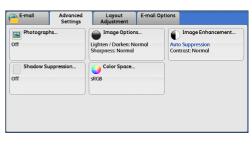

Color Space	💢 Cancel	🔗 Save
SRC8 Sevice Color Space	e when Color is selected in Co	0

∎sRGB

Uses the color space that conforms to sYCC.

■Device Color Space

Uses the color-space standard of the machine. Recommended for advanced color processing using high-quality color.

- **Note** ICC profiles can be used on color management applications and are useful for specialprocessing regarding the data scanned with [Device Color Space].
 - When [Device Color Space] is selected, the following image quality features are changed to their defaults:
 - Lighten/Darken, Sharpness, Background Suppression, Contrast, Shadow Suppression
 - When [Color Scanning] is set to [Auto Detect], [sRGB] is applied to the color pages of the documents.

Layout Adjustment

This section describes the features you can select on the [Layout Adjustment] screen under [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB]. The following shows the reference section for each feature.

Resolution (Specifying a Scanning Resolution)	
2 Sided Scanning (Scanning Both Sides of a Document)	306
Book Scanning (Scanning Facing Pages on Separate Sheets)	306
Original Size (Specifying a Scan Size)	307
Mixed Size Originals (Scanning Different Size Documents Simultaneously)	308
Edge Erase (Erasing Edges and Margin Shadows in the Document)	310
Reduce/Enlarge (Specifying a Scanning Ratio)	311
Original Orientation (Specifying the Orientation of the Loaded Documents)	312

1 On the [Services Home] screen, select [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB].

Copy	Fax / Internet Fax	E-mail		Language Screen Brightness
G Simple Copy	Simple Fax	Scan to PC	1/2	Setup
Store to Folder	Send from Folder	Stored Programming		Activity Report Fax Receiving Mode



2 Select a feature on the [Layout Adjustment] screen.

Scan to PC Advance Settin		g Options
Resolution 00 dpi	2 Sided Scanning 1 Sided	A B Book Scanning Off
Original Size uto Detect	Mixed Size Originals.	Edge Erase T/B: 2mm L/R: 2mm Ctr: 0mm
Reduce / Enlarge 00%	Original Orientation. Sideways Images	

Resolution (Specifying a Scanning Resolution)

This feature allows you to set the resolution to scan a document.

As the value increases, the scan becomes more detailed, but the data size also increases. The scanning and transfer times increase as well.

A B Book Scanning.

Edge Erase.

T/B: 2mm L/R: 2mm Ctr: 0mm

Off

- Select [Resolution]. Scan to PC Advanced Res 200 dpi Original Size. Auto Detect 📑 Reduce / Enlarge. 100% Select any option. Resolution · Select either [200 dpi] or [300 dpi] when
 - 💢 Cancel 🔗 Save 200 dpi 🔊 300 dpi 🔊 400 dpi 💦 600 dpi

Layout Adjustment

1 Sided

Off

2 Sided Scanning.

Mixed Size Originals

Criginal Orientation.

Sideways Images

Filing Options

Scan 5

2 Sided Scanning (Scanning Both Sides of a Document)

[MRC High Compression] is set to [On]

for PDF, DocuWorks or XPS files on the

· Select either [200 dpi] or [300 dpi] when

[Searchable Text] is set to [Searchable] for PDF or DocuWorks files on the [File

 Select either [200 dpi] or [300 dpi] when the [Specific Color] check box is selected for PDF or DocuWorks files on the [File

[File Format] screen.

Format] screen.

Format] screen.

This feature is the same as [2 Sided Scanning] on the [E-mail] screen.

For more information, refer to "2 Sided Scanning (Scanning Both Sides of a Document)" (P.265).

Book Scanning (Scanning Facing Pages on Separate Sheets)

This feature allows you to scan facing pages of a document onto separate sheets of paper in page order.

This is useful if you want to separately scan facing pages of a bound document such as a booklet.

- You cannot use the document feeder with this feature.
 - · Non-standard size documents and undetectable-size documents may not be separated into two accurately.
- 1 Select [Book Scanning].

Note

1

2

Note

Scan to PC Layout Adjustment Advanced A B Book Scanning... 🚽 2 Sided Scanning.. Resolution 200 dpi 1 Sided off Edge Erase.. Original Size. Mixed Size Originals Auto Detec T/B: 2mm L/R: 2mm Ctr: 0mm Reduce / Enlarg Criginal Or eways Images AB Book Scanning 💥 Cancel 🛷 Save

Off AB Both Pages	Binding Edge Erase	Place original on the Document Glass as shown.
Left Page then Right B Right Page On then Left Fop Page then Bottom		

2 Select any option.

■Off

Does not scan the document as a bound document.

Left Page then Right

Scans the left page and then the right page of facing pages.

Right Page then Left

Scans the right page and then the left page of facing pages.

■Top Page then Bottom

Scans the top page and then the bottom page of facing pages.

■Both Pages

Scans both pages in page order.

■Left Page Only

Scans the left page only in page order. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Right Page Only

Scans the right page only in page order. You can select this option when [Left Page then Right] or [Right Page then Left] is selected.

■Top Page Only

Scans the top page only in page order. You can select this option when [Top Page then Bottom] is selected.

Bottom Page Only

Scans the bottom page only in page order. You can select this option when [Top Page then Bottom] is selected.

Binding Edge Erase

Erases the shadow from the center section of the document. You can specify the binding erase width in the range from 0 to 50 mm in 1 mm increments.

Original Size (Specifying a Scan Size)

This feature allows you to set the scan size for a document.

Use this feature when a document is a non-standard size, or when you want to scan a document at a size different from the original size. You can also add margins, or delete unnecessary margins using this feature.

1 Select [Original Size].

Scan to PC Advanced Settings		g Options
Resolution 200 dpi	2 Sided Scanning 1 Sided	Book Scanning Off
Original Size uto Detect	Mixed Size Originals Off	Edge Erase T/B: 2mm L/R: 2mm Ctr: 0mm
Reduce / Enlarge 00%	Original Orientation Sideways Images	•

2 Select any option. When you select a non-standard size,

specify values for the X and Y directions.

		X Cancel 🤣 Save
		15⇔297mi
A6 🗅	11 x 17" 🗅	Auto
B4 ⊡	8.5 x 14" 🗆	+
B5 🗆	8.5 x 13" 🗆	15↔432mm _
8K 🗆	8.5 x 11" 🛙	- +
16K 🖞	5 x 7" fl	
	В4 с В5 с 8К с	В4 а 8.5 x 14° а В5 а 8.5 x 13° а 8К а 8.5 x 11° а

■Auto Detect

Detects the document size automatically. The following table shows the document sizes that can be detected automatically.

	Document feeder	Document glass
Auto-detectable Document Sizes	B5, B5엽, B4, A5, A5엽, A4, A4엽, A3, 8.5 x 11", 8.5 x 11"엽, 11 x 17", 16K엽, 8K	B6, B5, B5입, B4, A6, A5, A5입, A4, A4입, A3, 8.5 x 11"입, 11 x 17", 16K, 16K입, 8K

Note • If the document size cannot be detected automatically, a screen to enter the document size appears.

The standard document sizes that can be detected automatically depend on the [Paper Size Settings] made in System Administration mode. For information on [Paper Size Settings], refer to "5 Tools" > "Common Service Settings" > "Other Settings" > "Paper Size Settings" in the Administrator Guide.

■Standard Size

Allows you to select from preset sizes.

■Variable Size

Allows you to enter the desired scan size when scanning a non-standard size document or when scanning at a size different from the original document size. You can specify a value in the range from 15 to 432 mm for the scan width (X), and a value in the range from 15 to 297 mm for the scan length (Y), in 1 mm increments. The scales attached on the upper and left edges of the document glass are helpful for you to specify values.

When [MRC High Compression] is set [On] for PDF, DocuWorks, and XPS files on the [File Format] screen, or when the [Specific Color] check box is selected, the variable ranges are 50 to 432 mm for the scan width (X) and 50 to 297 mm for the scan length (Y), in 1 mm increments.

Mixed Size Originals (Scanning Different Size Documents Simultaneously)


You can scan documents of various sizes simultaneously with the respective sizes or with the same size. To use this feature, load the documents in the document feeder.

Important • When you select [Color] in [Color Scanning], and [2 Sided] in [2 Sided Scanning], set [Resolution] to [400 dpi] or lower.

- When you select [2 Sided] in [2 Sided Scanning] to scan A3 documents, set [Resolution] to [400 dpi] or lower. Selecting [600 dpi] will cause an error message to be displayed.
- Always load A5 documents in portrait orientation.
- When loading B5 documents together with A3 documents loaded in landscape orientation or A4 documents loaded in portrait orientation, load the B5 documents in portrait orientation.
- When loading documents, align the top left corners of the documents properly. Otherwise, a paper jam may occur.

- The recommended document size combinations are A4 portrait and A3 landscape, or B5 portrait and B4 landscape. If another combination of document sizes is used, the documents can be fed at an angle and may not be scanned properly.
- When you select [Enter Output Size] in [Reduce/Enlarge] and specify the output size in [Output Size], the scanned data is automatically reduced/enlarged to the specified size. However, since the scanned image is not rotated, the image will be reduced/enlarged to fit the specified size while keeping its orientation. For example, when an A3 landscape original is loaded and the output size is set to A4 portrait, the scanned image is reduced to A5 landscape and printed on A4 portrait paper.
 - If the document size cannot be detected automatically, a screen to enter the document size will appear.
- **1** Select [Mixed Size Originals].

Select any option.

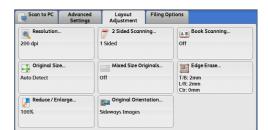

Mixed Size (Originals	💢 Cancel	🔗 Save
¥ ^{Off}	Align the top-left corners of your Origin and load them in the Document Feeder os shown. Adjust the Guides to just touch the largest size paper. - Load 5.5 x 8.5° and AS originals in port orientation.		Inal Orientation Upright Image Sideways Images

∎Off

2

Select this option when all documents are of the same size.

∎On

When scanning documents of different sizes, the machine automatically detects the size of each document.

Original Orientation

Specify the orientation of the loaded document.

When you load the top edge of the document against the left side of the document glass or the document feeder, and then select [Sideways Images], the document is displayed in the correct orientation when viewed on your computer screen.

- **Note** If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.
- Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

• Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Edge Erase (Erasing Edges and Margin Shadows in the Document)

When you scan a document with the document cover open or when you scan a book, the edges and center margin of the document may be scanned as black shadows. The Edge Erase feature allows you to erase such shadows.

• For 2-sided originals, the same edge erase amounts are set for the front and back sides.

- If you set [Reduce/Enlarge], the edge erase amounts will be reduced or enlarged in proportion to the ratio you specified.
- **1** Select [Edge Erase].

2 Select any option.

Scan to PC	Advanced Settings	Layout Adjustment	Filing Options
Resolution. 200 dpi		2 Sided Scan 1 Sided	ning Off
Original Siz		Mixed Size Or Off	iginals T/B: 2mm L/R: 2mm Ctr: 0mm
Reduce / Er		Driginal Orier Sideways Images	tation

📕 Edge Erase	X Cancel	Save
Erase Value 0++50mm All Edges Top & Bottom Left & Right Cent 2 2 2		nal Orientation Upright Images Sideways Images

- **3** If you select [Parallel Edges], use [+] and [-] to specify the erase widths of the top and bottom, left and right, and center of the document.
- 4 Select [Original Orientation].

■All Edges

The edge width to erase is set to 2 mm for the top and bottom, and left and right edges.

■Parallel Edges

Allows you to adjust the edge erase amounts.

Top & Bottom

Erases the shadows of top and bottom edges of the document according to the orientation of the loaded document. You can specify the edge width to erase in the range from 0 to 50 mm in 1 mm increments.

· Left & Right

Erases the shadows of left and right edges of the document according to the orientation of the loaded document. You can specify the edge width to erase in the range from 0 to 50 mm in 1 mm increments.

Center

Erases the shadow in the center of facing pages of a bound document. You can specify the center erase width in the range from 0 to 50 mm in 1 mm increments.

Original Orientation

Specify the orientation of the loaded document.

When you load the top edge of the document against the left side of the document glass or the document feeder, and then select [Sideways Images], the document is displayed in the correct orientation when viewed on your computer screen.

Note • If the [Original Orientation] setting differs from the actual document orientation, the machine may not detect the top of the document correctly.

· Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

• Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

Reduce/Enlarge (Specifying a Scanning Ratio)

This feature allows you to set the scanning ratio for the document to be scanned. • When [Searchable Text] is set to [Searchable], [Reduce/Enlarge] is set to [100%].

1 Select [Reduce/Enlarge].



Reduce / Enlarg	je	1	💢 Cancel	🚽 🛷 Save
	Variable %	Preset %		
Proportional %	25 ↔ 400% +	100%	86% / A4→E	A3→B4, B5
Enter Output Size	100 -	50% A3→A5, B4→B6	115% B5→A	5 B4→A3, 44
		61% A3→B5	122% A5→E	5 A4→B4, B5
		70% A3→A4, B4→B5	141% B5→B	5 A4→A3, 34
		81% B4→A4, B5→A5	200% B6→B	5 A5→A3,

■Proportional %

Select any option.

2

Allows you to select a preset ratio, or enter a value in the range from 25 to 400% in 1% increments.

Use the numeric keypad or [+] and [-] to enter a value.

• Variable %

Enter the scanning ratio. Specifying "100%" scans at the same image size as the original document.

Preset %

Select from preset ratios.

You can change the default values of scan ratios other than [100%]. For information on the settings, refer to "5 Tools" > "Scan Service Settings" > "Reduce/Enlarge Presets" in the Administrator Guide.

■Enter Output Size

In [Output Size], select the output size of the scanned document. The machine automatically calculates the scanning ratio based on the selected output size and the original document size.

• Selecting [Enter Output Size] may

generate blank margin areas.

📕 Reduce / Enlarge 💥 Cancel Save Output Size A3 🕫 B4 🕫 8.5 x 14" 🕫 Proportional % A4 🕫 B5 🕫 8.5 x 13" 🕫 Enter Output Siz A4 D 8K 🕞 8.5 x 11" D A5 🗆 16K 🛛 5 x 7" D A6 🗖 11 x 17" 🖬

Original Orientation (Specifying the Orientation of the Loaded Documents)

This feature allows you to specify the orientation of the loaded document.

When you load the top edge of the document against the left side of the document glass or the document feeder, and then select [Sideways Images], the document is displayed in the correct orientation when viewed on your computer screen.

Note

Note

- If the [Original Orientation] setting differs from the actual document orientation, the machine
 may not detect the top of the document correctly.
- · Upright Images

Select this option when placing the top edge of the document against the top side of the document glass or document feeder.

• Sideways Images

Select this option when placing the top edge of the document against the left side of the document glass or document feeder.

E-mail Options/Filing Options

This section describes the features you can select on the [E-mail Options] or [Filing Options] screen under [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB]. The following shows the reference section for each feature.

Quality/File Size (Specifying the Image Compression Ratio When Scanning)	
Read Receipts (Specifying Read Receipts)	
Split Send (Sending in Sections)	
File Name (Specifying a Name for the File to be Sent)	
Reply To (Specifying a Reply Address)	
File Name Conflict (Setting the Action to be Taken for File Name Conflict)	
File Name (Specifying a Name for the File to be Saved)	
Encryption (Sending E-mail Encrypted by S/MIME)	
Digital Signature (Sending E-mail with a Digital Signature by S/MIME)	
Login Name	
Password	
Meta Data	

1 On the [Services Home] screen, select [E-mail], [Store to Folder], [Network Scanning], [Scan to PC], [Store & Send Link], or [Store to USB].






- 2 Select a feature on the [E-mail Options] or [Filing Options] screen.
 - Note The features displayed on the screen depend on the Scan service selected on the [Services Home] screen. The screen shown on the right appears when [E-mail] is selected.



Quality/File Size (Specifying the Image Compression Ratio When Scanning)

This feature allows you to select the image compression level when [Color Scanning] is set to [Color] or [Grayscale].

1 Select [Quality/File Size].



- **2** Select any button.
 - Note
- If the High Compression Image Kit (optional) is installed, and when [MRC High Compression] is set [On] on the [File Format] screen, three image compression levels are available.

🔋 Quality / File Size	X Cance	el 🖉 🛷 Save
Normal Quality	High Quality	This feature is unavailable when Black & White is selected.
Provide the second s		
Small File Size	Large File Size	

■Normal Quality

The image is saved with high compression. Image quality degrades, but the file size decreases.

High Quality

Note

The image is saved with low compression. Image quality improves, but the file size increases.

Read Receipts (Specifying Read Receipts)

When using the E-mail service, you can receive read receipts from e-mail recipients. This feature is available only when recipients support the MDN feature.

- [Read Receipts] is displayed only when [Tools] > [System Settings] > [E-mail/Internet Fax Settings] > [E-mail Control] > [Read Receipts] is set to [On].
 - When multiple e-mails are sent using [Split Send], a read receipt is requested for each e-mail.
 - Read receipts are returned to the address specified in [Reply To], or they are returned to the address specified in [From] on the [E-mail] screen if [Reply To] is not set.
 - This feature is only available when the recipient also sets to return read receipts.
- 1 Select [Read Receipts].

E-mail	Advanced Settings	Layout Adjustment	E-mail Options
Quality / F Quality: Higher File Size: Larger	+2	Read Receipts. Off	Split Send Split by Page
File Name Auto Name		Reply To	
)	(

2 Select [On].



■Off

Select this option when you do not request read receipts.

∎On

Select this option when you request read receipts.

Split Send (Sending in Sections)

If the size of the data to be attached is large when using the E-mail service, you can split the data by page or by data size and then send the data.

For information on [Split Send], refer to "5 Tools" > "E-mail/Internet Fax Service Settings" > "E-mail Control" > "Split Send Method" in the Administrator Guide.

1 Select [Split Send].

Select any option.

合 E-mail	Advanced Settings	Layout E Adjustment	-mail Options
Quality / F Quality: Higher File Size: Larger	2	Read Receipts Off	Split Send Split by Page
File Name Auto Name		Reply To	

Split Send		💢 Cancel	🛷 Save
Split by Page	When the file size of an o the file can be split into fi to be sent separately as f	les of specific data size	

■Split by Page

2

The data is split by page.

 • [Split by Page] is available only when [File Format] on the [E-mail] screen is set to [PDF], [DocuWorks], or [XPS], or when [File Format] is set to [TIFF] with the [Single File for Each Page] check box not selected.

Split by Data Size

The data is split by data size.

Note • Select this option if your e-mail application supports message/partial.

File Name (Specifying a Name for the File to be Sent)

When using the E-mail, Scan to PC, Network Scanning, or Store & Send Link service, you can specify a name for the file to be sent.

■Auto Name

The file name is "img-xxx-yyy.zzz" (where xxx is the date and time, yyy is the page number, and zzz is the extension).

The extension depends on the setting in [File Format].

- When [TIFF] is selected in [File Format]: tif
- When [JEPG] is selected in [File Format]: jpeg
- When [PDF] is selected in [File Format]: pdf
- When [XPS] is selected in [File Format]: xps
- · When [DocuWorks] is selected in [File Format]: xdw

■To set the file name

- **1** Select [File Name].
- 2 Enter a file name using the displayed keyboard.


For information on how to enter characters, refer to "Entering Text" (P.68).

- Note When each page is saved as one file, the page number is added to the end of each file name.
 - Up to 128 characters can be entered as a file name for the Scan to PC service.
 - Up to 28 characters can be entered as a file name for the E-mail service.
 - Up to 28 characters can be entered as a file name for the Store & Send Link service.
 - Up to 40 characters can be entered as a file name for the Network Scanning service.

Reply To (Specifying a Reply Address)

When using the E-mail service, you can specify the address replies are sent to.

1 Select [Reply To].

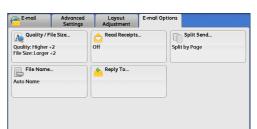

2 Enter an address replies are sent to.

🚖 Reply To		😫 Cancel	Save
	Reply To		
			Clear
	<u>.</u>		🧟 Reply To Me
			Address Book

■Reply To

Select the [Reply To] box to display the keyboard screen on which you can enter an address replies are sent to.

■Clear

Deletes the address entered in [Reply To].

■Reply To Me

Uses the address specified in [From] on the [E-mail] screen as a reply address.

Note • [Reply To Me] can only be selected when an address is specified in [From] on the [E-mail] screen.

Address Book

Allows you to select a reply address from the Address Book. For more information, refer to "Address Book (Specifying an E-mail Address)" (P.258).

File Name Conflict (Setting the Action to be Taken for File Name Conflict)

When using the Scan to PC service, you can set the action to be taken when the file name conflicts with another file stored in the destination.

1 Select [File Name Conflict].

Scan to PC	Advanced Settings	Layout Adjustment	Filing Options
Quality / Fi Quality: Higher + File Size: Larger	le Size	File Name	File Name Conflict Rename New File

2 Select any option.

File Name Co	mflict	💢 Cancel	Save 💎
Do Not Save	The new file is not sav file name in the same	ed if there is an existing file with directory.	the same
Rename New File			
Overwrite Existing File			

■Do Not Save

Cancels the job without saving the file.

Rename New File

Automatically changes the file name by appending a number (0001 - 9999) to the file name, and saves the file.

■Overwrite Existing File

Replaces the existing file with the new one.

File Name (Specifying a Name for the File to be Saved)

When using the Store to Folder service, you can specify a name for the file to be saved.

■Auto Name

The file name is "img-xxx" (where xxx is the date and time).

Note • If a file name is deleted, [(Auto Set)] is displayed.

■To set the file name

- 1 Select [File Name].
- 2 Enter a file name with up to 28 characters using the displayed keyboard.
 - **Note** If a file stored in a folder of the machine is imported to a computer, the specified name may not be reflected on it depending on the import method.

For information on how to enter characters, refer to "Entering Text" (P.68).

Encryption (Sending E-mail Encrypted by S/MIME)

When using the E-mail service, you can send e-mail encrypted by S/MIME.

When sending encrypted e-mail, select an e-mail address associated with a certificate that can be encrypted, from the Address Book.

- You can change the default value of [E-mail Encryption] in System Administration mode. For information on how to change the default value, refer to "5 Tools" > "Scan Service Settings" > "Scan Defaults" > "E-mail Encryption" in the Administrator Guide.
 - This feature is supported only by the ApeosPort series.

∎Off

Sends e-mail without encryption.

∎On

Sends e-mail with encryption.

Digital Signature (Sending E-mail with a Digital Signature by S/MIME)

When using the E-mail service, you can send e-mail with a digital signature by $\ensuremath{\mathsf{S/MIME}}$.

Digital Signature allows a recipient to confirm whether the contents of the e-mail have been changed, or whether the e-mail has been sent from the proper sender.

To use this feature, the machine's e-mail address must be linked to a certificate.

Note • This feature is supported only by the ApeosPort series.

For information on how to link a certificate to the machine's e-mail address, refer to "13 Encryption and Digital Signature Settings" > "Configuration of E-mail Encryption/Digital Signature" in the Administrator Guide.

∎Off

Sends e-mail without a digital signature.

∎On

Sends e-mail with a digital signature.

Scan

5

Login Name

You can enter the login name for a destination server.

- This feature is displayed only when [Network Scanning] is selected on the [Services Home] screen.
- 1 Select [Login Name].
- 2 Enter the login name using the keyboard displayed on the screen.

For information on how to enter characters, refer to "Entering Text" (P.68).

Password

You can enter the password for a destination server.

- This feature is displayed only when [Network Scanning] is selected on the [Services Home] screen.
- **1** Select [Password].
- 2 Enter the password using the keyboard displayed on the screen.

For information on how to enter characters, refer to "Entering Text" (P.68).

Meta Data

You can change the values of the Document Management Field (DMF) if they are specified for the selected job template.

• This feature is displayed only when [Network Scanning] is selected on the [Services Home] screen.

6 Send from Folder

This chapter describes the basic operations and features to use folders.

No	• The Send from Folder service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.	
•	Folder Operating Procedure	322
•	Selecting a Folder	324
•	Checking/Operating Files in a Folder	325
•	Checking File Details	327
•	Printing Files in a Folder	328
•	Configuring/Starting Job Flow	331

Folder Operating Procedure

This section describes the basic procedure to operate files in folders.


You can store print files submitted by a computer, scan files, and fax files in folders on the machine. These files stored in a folder can be sent by e-mail and can be retrieved from a network computer. You can also automate routine tasks, or register private folders and shared folders separately. The following shows the reference section for each procedure.

Step 1 Opening the [Send from Folder] Screen	322
Step 2 Selecting a Folder	323
Step 3 Checking/Selecting Files in a Folder	323
Step 4 Operating Files in a Folder	323

Step 1 Opening the [Send from Folder] Screen

The following describes how to select features on the [Send from Folder] screen. Note • The features displayed on the screen depend on your machine configuration.

1 Press the <Services Home> button.



<Services Home> button



2 Select [Send from Folder].

Step 2 Selecting a Folder

Access to some folders may be restricted, depending on the settings of the Authentication feature.

For information on the folder access restrictions using the Authentication feature, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" in the Administrator Guide.

1 Select a folder on the [Send from Folder] screen.

🗟 Send from	n Folder			
001	002	003	004	Go to
TEST1	TEST2	TEST3	TEST4	001 ↔ 200
005	006	007	008	
TEST5	TEST6	TEST7	TEST8	
009	010	011	012]
TEST9	TEST10	TEST11	TEST12	
013	014	015	016	
TEST13	TEST14	<available></available>	<available></available>	

2 If a passcode is set for the folder, enter the passcode and select [Confirm].

Step 3 Checking/Selecting Files in a Folder

1 Select the display style from [List] and [Thumbnail].

🔁 Folder 001 - File List	🔇 Ref	resh	🕜 Close	
List 🗙	Numb	Number of Files: 12		
List	 Date & Time 	Pages		Delete
Thumbnail 1	2011/1/26 2:20PM	11	*	File Details.
👩 Doc Name102	2011/1/26 2:20PM	12		
🍖 Doc Name103	2011/1/26 2:20PM	13		Job Flow Settings
裬 Doc Name104	2011/1/26 2:20PM	14		Print
👩 Doc Name105	2011/1/26 2:20PM	15		Batch Print.

2 Select a file to send by e-mail or to print.

📄 Fold	er 001 - File List		📢 Re	fresh	Close
List	-	Numb	er of Files:	12	Select All
Order	File Name	Date & Time	Pages		Delete
8	Doc Name101	2011/1/26 2:20PM	11		File Details
	Doc Name102	2011/1/26 2:20PM	12		
	Doc Name103	2011/1/26 2:20PM	13		Job Flow Settings
	Doc Name104	2011/1/26 2:20PM	14		Print
	Doc Name105	2011/1/26 2:20PM	15	¥	Batch Print
C				· · · · ·	

For information on the [File List] screen, refer to "Checking/Operating Files in a Folder" (P.325).

Step 4 Operating Files in a Folder

on the [Send from

Selecting a Folder

The following describes how to select a folder.

Access to some folders may be restricted, depending on the settings of the Authentication feature.

For information on the folder access restrictions using the Authentication feature, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" in the Administrator Guide.

1 Select a folder on the [Send from Folder] screen.

Note

- Select [▲] to return to the previous screen or [♥] to move to the next screen.
 - An arrow is displayed next to each folder which has a link to a job flow sheet and for which the auto start is set.
 - If the passcode entry screen appears, enter the passcode and select [Confirm].

Displays a folder at the top when you enter the 3-digit folder number with the numeric keypad.

🗟 Send fro	m Folder			
001	002	003	004	Go to
TEST1	TEST2	TEST3	TEST4	001 ↔ 200
005	006	007	008	
TEST5	TEST6	TEST7	TEST8	
009	010	011	012]
TEST9	TEST10	TEST11	TEST12	
013	014	015	016	
TEST13	TEST14	<available></available>	<available></available>	

Checking/Operating Files in a Folder

You can check or operate files stored in a folder.

Note • When selecting print files, [Job Flow Settings] may not be available for some models.

- 1 Select a folder on the [Send from Folder] screen.
- **2** Select the display style from [List] and [Thumbnail].

m Folder			
002	003	004	Go to
TEST2	TEST3	TEST4	001 ↔ 200
006	007	008	A
TEST6	TEST7	TEST8	
010	011	012	•
TEST10	TEST11	TEST12	
014	015	016	
TEST14	<available></available>	<available></available>	
	002 TEST2 006 TEST6 010 TEST10 014	002 TEST2 006 TEST6 007 TEST6 007 TEST7 010 011 TEST11 014 015	002 003 004 TEST2 TEST3 TEST4 006 007 008 TEST6 TEST7 TEST8 010 011 012 TEST10 TEST11 TEST12 014 015 016

🤁 Folder 001 - File List	🔇 Refi	resh 🛛 🧇 Close	
List	Number of Files: 1	2 Select All	
List	Date & Time Pages	Delete	
Thumbnail 1	2011/1/26 2:20PM 11	File Details	
oc Name102	2011/1/26 2:20PM 12		
boc Name103	2011/1/26 2:20PM 13	Job Flow Settings	
👌 Doc Name104	2011/1/26 2:20PM 14	Print	
👩 Doc Name105	2011/1/26 2:20PM 15	▼ Batch Print	

📄 Fold	ler 001 - File List		🔇 Re	fresh	💛 🛷 Close
List	-	Nur	nber of Files:	12	Select All
Order	File Name	Date & Time	Pages		Delete
1 😑	Doc Name101	2011/1/26 2:20PM	۸ 11		File Details
	Doc Name102	2011/1/26 2:20PN	и 12		Job Flow
	Doc Name103	2011/1/26 2:20PM	и 13		Settings
	Doc Name104	2011/1/26 2:20PM	и 14		Print
	Doc Name105	2011/1/26 2:20PM	и 15	•	Batch Print

3 Select a file.

Note

- Select [▲] to return to the previous screen or [▼] to move to the next screen.
- You can sort files in ascending or descending order by selecting either [File Name] or [Date & Time].
- At the left of each file name, an icon is displayed to show the file type.
 Scan file
 - 🖶 : Print file
 - 渣 : File for Secure Polling
- 🐻 : Fax/IP Fax (SIP) file
- 📷 : Internet Fax file
- You can select up to 100 files separately, or select all files at a time. If you select files separately, a number appears to the left of the icon indicating the order in which it was selected. Files are processed in this order.
- **4** Select any option.

■Refresh

Displays the updated information.

■List

Lists the files stored in the folder, with the dates the files were stored and the number of pages.

Thumbnail

Displays the images and names of the files stored in the folder.

- Important If the power is cut off immediately after a scanned file is stored in a folder, or if the hard disk space is insufficient to display thumbnails, files in the folder may not be displayed in thumbnail view. In such cases, display them in list view.
 - Characters and images in thumbnail view may not be correctly displayed since they are scaled down from the actual sizes.
- The orientation of an image displayed in thumbnail view depends on which orientation the document was stored in.

■Number of Files

Displays the number of files stored in the selected folder.

■Select All

Selects all the files in the folder. To deselect all the files, select this button again while all the files are selected.

■Delete

Deletes the selected files in the folder.

■File Details

Previews the selected file to allow you to check the contents. Refer to "Checking File Details" (P.327).

■Job Flow Settings

Displays the [Job Flow Settings] screen on which you can create, link, and execute job flows.

Refer to "Configuring/Starting Job Flow" (P.331).

 Files stored in a folder by specifying [Store in Remote Folder] on a print driver are called "print files". Job flows are not available for print files. If print files are included in the selected files, a job flow can be executed for the files other than the print files.

■Print

Allows you to print the selected files separately. Refer to "Print" (P.328).

Batch Print

Allows you to print the multiple selected files as one file. Refer to "Batch Print" (P.329).

Checking File Details

You can preview the selected file to check the contents.

- Note Monochrome images with high gradation levels may appear bluish when previewed.
 - When the Image Log Control feature is used, it may take more time than expected to preview a file.
- **1** Select a file on the [File List] screen.

2	Click [File Details]	
---	----------------------	--

Select any option.

3

Folder 001 - File List		🔇 Refresh	🖉 🔶 Close
ist 💌	Numbe	r of Files: 12	Select All
Order File Name	 Date & Time 	Pages	Delete
1 😑 Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
🝺 Doc Name102	2011/1/26 2:20PM	12	Job Flow
裬 Doc Name103	2011/1/26 2:20PM	13	Settings
à Doc Name104	2011/1/26 2:20PM	14	Print
👩 Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print

🔁 Folder 001 - File List		🔇 Refresh	🖉 🔶 Close
.ist 💌	Numb	er of Files: 12	Select All
Order File Name	 Date & Time 	Pages	Delete
1 😬 Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
👩 Doc Name102	2011/1/26 2:20PM	12	
裬 Doc Name103	2011/1/26 2:20PM	13	Job Flow Settings
à Doc Name104	2011/1/26 2:20PM	14	Print
👩 Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print

Folder 001 - File I	Details	Close
Vhole Page 🚽		Current Page 1 ↔ 4
lo Rotation	April 11, 1998	1 - +
File Number: 00012 File Name: Doc Name1	SAMPLE	
Date & Time: 26/01/2011 11:26		Change File Name

■Whole Page / Enlarged View

Allows you to select whether to display the whole page or to enlarge the image by 200%. You can select [Whole Page] or [Enlarged View] for the view size.

- Note A small-size document may not be enlarged even if you select [Enlarged View].
 - You can rotate or enlarge the image of the file in a folder in the preview, but you cannot save the file with the image rotated or enlarged.

■No Rotation / Right 90 degrees / Left 90 degrees/ 180 degrees

Allows you to select an angle to preview the image from [No Rotation], [Right 90 degrees], [Left 90 degrees], and [180 degrees].

Note • You can rotate or enlarge the image of the file in a folder in the preview, but you cannot save the file with the image rotated or enlarged.

■Change File Name

Allows you to change the file name. Use the displayed keyboard to enter a new name.

■Current Page

Specify a page to preview on the screen.

Printing Files in a Folder

You can print selected files in a folder.

1 Select files on the [File List] screen.

Fold	ler 001 - File List		🔇 Refrest	n 🛷 Close
ist	-	Numb	er of Files: 12	Select All
Order	File Name	Date & Time	Pages	Delete
1 🗃	Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
C	Doc Name102	2011/1/26 2:20PM	12	Job Flow
2	Doc Name103	2011/1/26 2:20PM	13	Settings
2	Doc Name104	2011/1/26 2:20PM	14	Print
	Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print

- 2 Select [Print] or [Batch Print].
 - When multiple files are selected, [Batch Print] allows you to print the selected files as a single file, while [Print] allows you to print them as separate files.

For information on [Print] and [Batch Print], refer to "Print" (P.328) and "Batch Print" (P.329).

3 Select any option. Enter the number of print sets using the numeric keypad, if necessary.

🔁 Folder 001 - File List		🔇 Refresh	🛷 Close
List	Numbe	er of Files: 12	Select All
Order File Name	 Date & Time 	Pages	Delete
1 😑 Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
👩 Doc Name102	2011/1/26 2:20PM	12	Job Flow
🍓 Doc Name103	2011/1/26 2:20PM	13	Settings
à Doc Name104	2011/1/26 2:20PM	14	Print
👩 Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print

Paper Supply	2 Sided Printing	
Auto Select	1 Sided	File Details
Output		, (
Staple: Off		Print Quantity 1 ↔ 999 Sets
Hole Punch: Off Right Top Tray		1
		Print

4 Select [Print]

When a file stored by [Store in Remote Folder] of a print driver is printed, the settings specified on the control panel or CentreWare Internet Services will override the settings specified on the print driver except the settings for [Pages Per Sheet (N-Up)], [Skip Blank Page], and [Print Position].

Print

Allows you to set the printing options.

Paper Supply

Allows you to select the paper.

2 Sided Printing

Allows you to set 2-sided printing.

Output

Allows you to set stapling, hole-punching, and the tray where the output is delivered.

• This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

For examples of the settings for stapling and hole-punching, refer to "When stapling/punching holes" (P.330).

File Details

Displays the [File Details] screen. Select a file from the list to check the preview image. For information on how to preview a file, refer to "Checking File Details" (P.327).

Print Quantity

Specify the number of print sets.

■Print

Prints the selected file.

Batch Print

Allows you to set the batch printing options.

You can print multiple files as one file. Up to 100 files can be bound in the selected order.

- **Note** For 2-sided printing, the last page will be blank when the total number of printed pages is odd. When printing multiple files, a blank page is inserted after the final page of each file.
 - When documents of various sizes are bound, some documents may be printed in improper orientation.
 - [Batch Print] is not available while interrupting another job.
 - [Batch Print] is not available for files received by fax, Internet Fax, or IP Fax (SIP), or files for Secure Polling. When the selected files contain fax or Internet Fax files, the machine will not print the fax or Internet Fax files but only the scan and print files.

■Paper Supply

Allows you to select the paper.

■2 Sided Printing

Allows you to set 2-sided printing.

■Output

Allows you to set stapling and hole-punching, and the tray where the output is delivered.

The number of sheets that can be stapled is 2 - 50 (when 80gsm paper is used).

Note • This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

For examples of the settings for stapling and hole-punching, refer to "When stapling/punching holes" (P.330).

■File Details

Displays the [File Details] screen. Select a file from the list to check the preview image. For information on how to preview a file, refer to "Checking File Details" (P.327).

■Print Quantity

Specify the number of print sets.


■Print

Prints the selected files.

When stapling/punching holes


The following table shows the stapling/hole-punching positions for print files stored in a folder by specifying [Store in Remote Folder] on a print driver, and for scan files. The following uses the example of [1 Staple] for stapling and [2 Holes] for punching holes.

· For print files in a folder stored by specifying [Store in Remote Folder] on a print driver

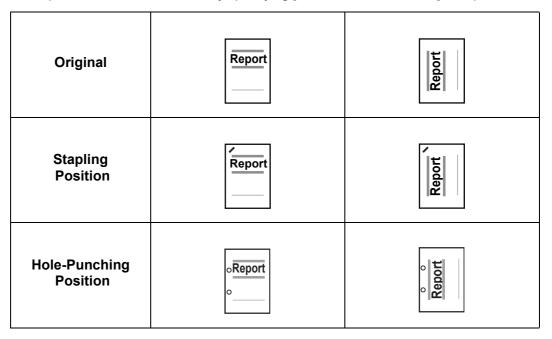

· For scan files stored in a folder

Important • Ensure that the actual orientation of the original document matches the [Original Orientation] setting in [Edge Erase] or in [2 Sided Scanning] on the [Layout Adjustment] screen.

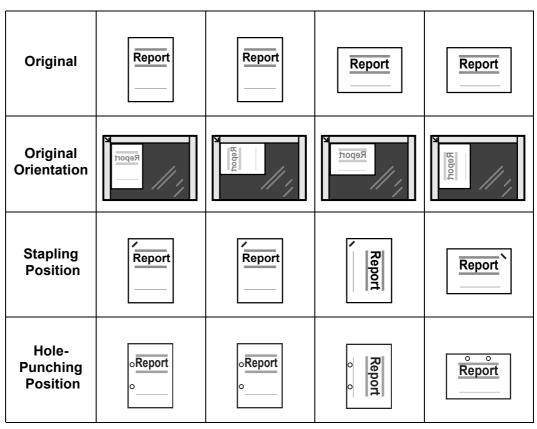

Configuring/Starting Job Flow

Job Flow is a feature that allows you to register transfer settings for scanned data, such as the transfer method and destination, to simplify data-transfer tasks.

Job flow sheets are categorized into two types according to the target. One type targets files stored in folders, and the other type targets scan files. This section describes the first type of job flow sheets, which target files stored in folders.

A job flow operates files stored in a folder, and starts in either of the following ways: 1) automatically start the job flow when a file is stored in a folder, or 2) select the job flow to manually operate files stored in a folder.

To automatically start a job flow, you must make a link with the folder and the job flow sheet in advance. Files are automatically processed with the job flow sheet when they are stored in the linked folder.

When the Authentication feature is disabled, job flows created in [Send from Folder] can only be used/edited/duplicated/deleted through the folder where the job flow was created. This type of job flow is not displayed on the [Create Job Flow Sheet] screen. When the Authentication feature is enabled, job flows whose owners are authenticated are displayed on the [Create Job Flow Sheet] screen.

For information on job flows that target scan files, refer to "Job Flow Sheets" (P.337).

You can register the following features:

- Forward
- E-mail Notification
- Print

For information on the restrictions on the combination of features, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" in the Administrator Guide.

■Forward

Multiple forwarding recipients can be configured for each forwarding method.

• FTP (ApeosPort series models only)

Forwards via FTP. Up to 2 recipients can be specified.

• SMB (ApeosPort series models only)

Forwards via SMB. Up to 2 recipients can be specified.

- Mail (ApeosPort series models only)
 Forwards via E-mail. Up to 100 recipients can be specified.
- Fax

Forwards via fax. Up to 100 recipients can be specified.

Internet Fax

Forwards via Internet Fax. Up to 100 recipients can be specified.

IP Fax (SIP)
 Forwards via IP Fax. Up to 100 recipients can be specified.

E-mail Notification

You can receive the job results by e-mail.

For more information, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" > "Create New Job Flow Sheet" in the Administrator Guide.

■Print

Files in a folder can be printed.

1 Select files on the [File List] screen.

📄 Folc	ler 001 - File List		🔇 Refresh	Close
List	•	Numbe	er of Files: 12	Select All
Order	File Name	 Date & Time 	Pages	Delete
1 🗃	Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
C	Doc Name102	2011/1/26 2:20PM	12	
2	Doc Name103	2011/1/26 2:20PM	13	Job Flow Settings
<u>}</u>	Doc Name104	2011/1/26 2:20PM	14	Print
6	Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print
				1
- Folc	ler 001 - File List		🔇 Refresh	Close
ist	-	Numbe	er of Files: 12	Select All
Order	File Name	 Date & Time 	Pages	Delete
1 🗃	Doc Name101	2011/1/26 2:20PM	11 🔺	File Details.
6	Doc Name102	2011/1/26 2:20PM	12	Job Flow
2	Doc Name103	2011/1/26 2:20PM	13	Settings
2	Doc Name104	2011/1/26 2:20PM	14	Print
6	Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print
💼 Folc	ler 001 - Job Flow Setting	s		Close
	w Sheet that has been linked t		C	Close
Job Fla	w Sheet that has been linked t			

Start Current

Select Job Flow Sheet.

Auto Star

3 Select any option.

2 Select [Job Flow Settings].

■Auto Start

Enables automatically starting the job flow for files stored in the folder. The job flow automatically starts when a file is stored.

■Start Current Job Flow

Select files in the folder, and then select this button to start the job flow linked to this folder.

Important • After executing the job flow, confirm the [Job Status] screen or print the Job History Report to check the results. For information on the Job History Report, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Job History Report" in the Administrator Guide.

■Cut Link

Cancels the link between a folder and the linked job flow sheet.

Create/Change Link

Displays the [Link Job Flow Sheet to Folder] screen. Refer to "[Link Job Flow Sheet to Folder] Screen" (P.333).

■Select Job Flow Sheet

Select this button while files are selected to display the [Select Job Flow Sheet] screen. Refer to "[Select Job Flow Sheet] Screen" (P.335).

[Link Job Flow Sheet to Folder] Screen

You can change the link between the folder and the job flow sheet.

Note • Linking, delinking, and Auto Start settings can also be performed when you create a folder.

1 Select a job flow sheet to link the folder to.

Folder 001 - File List		Refresh	🖉 🔶 Close
ist 💌	Numbe	r of Files: 12	Select All
Order File Name	Date & Time	Pages	Delete
1 😑 Doc Name101	2011/1/26 2:20PM	11 🔺	File Details
🔞 Doc Name102	2011/1/26 2:20PM	12	Job Flow
裬 Doc Name103	2011/1/26 2:20PM	13	Settings
à Doc Name104	2011/1/26 2:20PM	14	Print
👩 Doc Name105	2011/1/26 2:20PM	15 🔻	Batch Print

- Important Selecting [Save] without selecting a job flow sheet does not set a link. If the selected job flow sheet is already linked, the link is canceled.
- Note

3

- Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can sort the list in ascending or descending order by selecting either [Name] or [Updated].
- **2** Select [Job Flow Settings].

Select [Create/Change Link].

Fol	der 001 - File List		🔇 Ref	resh	🤣 Close
.ist	-	Numb	er of Files:	12	Select All
Order	File Name	Date & Time	Pages		Delete
1 🗧	Doc Name101	2011/1/26 2:20PM	11		File Details
() Doc Name102	2011/1/26 2:20PM	12		
2	Doc Name103	2011/1/26 2:20PM	13		Job Flow Settings
2	Doc Name104	 2011/1/26 2:20PM	14		Print
F	Doc Name105	2011/1/26 2:20PM	15	•	Batch Print

	f:)}
	2
6)

Close

Select Job Flow Sheet Send

Folder 001 - Job Flow Settings
Job Flow Sheet that has been linked to this folder: Name1
Description: Comment1

Auto Start

4 Select any option.

		Search by Name	
Name 🔺	 Updated 	L i	our or ny realite
🔁 Name1	2011/1/26	A	
📴 Name 2	2011/1/26		earch by Keyword
🗁 Name 3	2011/1/26		Select
📴 Name 4	2011/1/26		Select Keyword Sheet Filtering
🗁 Name 5	2011/1/26	T	None Sneet Filtering.

Start Current Job Flow

■Refresh

Displays the updated information.

■Create

Displays the [Create New Job Flow Sheet] screen.

For more information, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" > "Create New Job Flow Sheet" in the Administrator Guide.

■Edit/Delete

Displays the [Details] screen.

For more information, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" > "Edit/Delete" in the Administrator Guide.

Search by Name

Searches for job flows that partially match the entry. The machine searches through job flow names that were registered when each job flow was created. The entry can be up to 128 characters long.

For information on how to enter characters, refer to "Entering Text" (P.68).

Search by Keyword

Searches for job flows that fully match the entry. The machine searches through keywords that were registered upon each job flow creation. The entry can be up to 12 characters long. You can select from preset keywords if they have been registered in System Administration mode.

For information on how to enter characters, refer to "Entering Text" (P.68).

Select Keyword

Displays the [Select Keyword] screen. Select a keyword registered in System Administration mode to search for job flows. Job flows that fully match the entry are searched. The machine searches through keywords that were registered upon each job flow creation.

■Sheet Filtering

Displays the [Sheet Filtering] screen. Refer to "[Sheet Filtering] Screen" (P.334).

[Sheet Filtering] Screen

This screen allows you to filter the job flow sheets displayed.

Displayed job flow sheets may vary depending on the Authentication feature. For more information, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" in the Administrator Guide.

- **1** Select the filtering conditions, and select [Save].
 - Note
- The job flows that can be displayed on [Send from Folder] are those whose [Target] is [Folder], and those stored in the machine.

🔢 Sheet Filtering		🗱 Cancel	🖉 🧇 Save
Owner	Target		
System Administrator	Folder		
Non-System			
Administrator			

■Owner

Select the owner of job flow sheets to filter.

Target (ApeosPort series models only)

Select the target of job flow sheets to filter.

[Select Job Flow Sheet] Screen

This screen allows you to select and execute a job flow for the selected files.

- **1** Select a job flow, and select [Start].
 - Note
- Select [▲] to return to the previous screen or [▼] to move to the next screen.
- You can sort the list in ascending or descending order by selecting either [Name] or [Updated].

■Start

Executes the selected job flow sheet.

■Refresh

Displays the updated information.

■Details

Displays the [Details] screen.

For more information, refer to "5 Tools" > "Setup" > "Create Job Flow Sheet" > "Edit/Delete" in the Administrator Guide.

■Change Settings

If the selected job flow sheet setting can be edited, the [Change Settings] screen appears. You can temporarily change the settings.

■Search by Name

Searches for job flows that partially match the entry. The machine searches through job flow names that were registered when each job flow was created. The entry can be up to 128 characters long.

For information on how to enter characters, refer to "Entering Text" (P.68).

Search by Keyword

Searches for job flows that fully match the entry. The machine searches through keywords that were registered upon each job flow creation. The entry can be up to 12 characters long. You can select from preset keywords if they have been registered in System Administration mode.

For information on how to enter characters, refer to "Entering Text" (P.68).

Select Keyword

Displays the [Select Keyword] screen. Select a keyword registered in System Administration mode to search for job flows. Job flows that fully match the entry are searched. The machine searches through keywords that were registered upon each job flow creation.

■Sheet Filtering

Displays the [Sheet Filtering] screen. Refer to "[Sheet Filtering] Screen" (P.334).

🙀 Folder 001 - Select Job Flow Sheet		💸 Refresh 🧹 🔗 Close	
Name	 Updated 		Search by Name
🔁 Name 1	2011/1/26	•	
📴 Name 2	2011/1/26		Search by Keyword
📴 Name 3	2011/1/26		An Select
📴 Name 4	2011/1/26		Keyword
📴 Name 5	2011/1/26	•	Sheet Filtering.
	Change Settings		Start

Job Flow Restrictions

Restrictions can be made for a job flow sheet so it can only be used by one user, be shared by multiple users, or be used for only certain folders.

Job flow restrictions may vary depending on the Authentication feature. For more information, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" in the Administrator Guide.

7 Job Flow Sheets

This chapter describes the scanning operation using a job flow sheet registered on the machine.

Job Flow Sheets is a service that allows you to register transfer settings for scanning data, such as the transfer method and destination, to simplify data-transfer tasks.

No	 Job flow sheets targeting scanned documents and print files are supported only by the ApeosPort series.
•	Job Flow Procedure

Job Flow Procedure

Job flow sheets are categorized into two types according to the target. One type targets scanned documents, and the other type targets files stored in folders. This section describes the first type of job flow sheets, which target scanned documents.

For information on job flow sheets that target files stored in folders, refer to "Configuring/Starting Job Flow" (P.331).

The following describes the procedure to operate a job flow. Refer to the following section for each procedure.

To create and register a job flow sheet, use a computer.


Step 1 Opening the [Job Flow Sheets] Screen	338
Step 2 Selecting a Job Flow Sheet	338
Step 3 Confirming/Changing the Job Flow Sheet	339
Step 4 Starting the Job Flow Sheet	339

Note
 To create a job flow sheet, use EasyOperator or the Device Setup Tool. EasyOperator is included in the Driver CD Kit. The Device Setup Tool is included in the ApeosWare Management Suite, which you can download from our website.

Step 1 Opening the [Job Flow Sheets] Screen

The following describes how to open the [Job Flow Sheets] screen.

1 Press the <Services Home> button.



2 Select [Job Flow Sheets].



Step 2 Selecting a Job Flow Sheet

1 Select a job flow sheet.

For more information on the [Job Flow Sheets] screen, refer to "Selecting/Changing a Job Flow Sheet" (P.340).

Name	Updated:	Search by Name.
骗 Name1	2011/1/29	
🖏 Name2	2011/1/29	Search by Keywor
🔓 Name3	2011/1/29	An Select
🔓 Name4	2011/1/29	Keyword
🖏 Name5	2011/1/29	Options Selected

Step 3 Confirming/Changing the Job Flow Sheet

 To confirm the details, select [Details]. To change the settings, select [Change Settings].

For information on how to check or change job flow settings, refer to "Selecting/Changing a Job Flow Sheet" (P.340).

Name	Updated:	Search by Name
骗 Name1	2011/1/29	A
🙀 Name2	2011/1/29	Search by Keyw
🙀 Name3	2011/1/29	An Select
🖥 Name4	2011/1/29	Keyword.
🖏 Name5	2011/1/29	Options Selecte

Step 4 Starting the Job Flow Sheet

- **1** Load a document.
 - Note A job flow with an application linked does not require you to load a document.
- **2** Press the <Start> button.
 - Important After executing the job flow, be sure to print the Job History Report to check the results. For information on the Job History Report, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Job History Report" in the Administrator Guide.

Selecting/Changing a Job Flow Sheet

This section describes how to select or edit a job flow sheet created on a network computer with EasyOperator or the Device Setup Tool.

Important • If characters not supported by the machine are used in the name or description of a job flow sheet, the characters will not be displayed or will be garbled on the screen. For information on characters that can be used in the names or descriptions of job flow sheets, refer to "16 Appendix" > "Notes and Restrictions" > "Notes and Restrictions on the Use of the Machine" in the Administrator Guide.

Note

- To communicate with network computers, enable the SOAP port on the machine.
 - A job flow sheet created on a network computer can be deleted, but cannot be changed or duplicated. However, you can temporarily change some items that are permitted to be changed.

For information on how to enable the port, refer to "5 Tools" > "Connectivity & Network Setup" > "Port Settings" in the Administrator Guide.

- **1** Select a job flow sheet.
 - Displayed job flow sheets may vary depending on the settings of the Authentication feature. For more information, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" > "Overview" > "Job Flow Sheet Types and Overview" in the Administrator Guide.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can sort the list in ascending or descending order by selecting either [Name] or [Updated].

Name	Updated:	Search by Name.
骗 Name1	2011/1/29	A
🙀 Name2	2011/1/29	Search by Keywor
🙀 Name3	2011/1/29	A Select
🙀 Name4	2011/1/29	Keyword
🖏 Name5	2011/1/29	Sheet Filter Options Selected

■Refresh

Displays the updated information.

Details

Displays the [Details] screen. You can confirm the details of a job flow such as the name, last updated date, target, owner, and save location. When you select the [1] button, the whole text of the description which was registered when the job flow sheet was created is displayed.

■Change Settings

Displays the [Change Settings] screen. You can change the job flow settings. Refer to "[Change Settings] Screen" (P.341).

Search by Name

Searches for job flows that partially match the entry. The machine searches through job flow names that were registered upon each job flow creation. The entry can be up to 128 characters long.

Search by Keyword

Searches for job flows that fully match the entry. The machine searches through keywords that were registered when each job flow was created. The entry can be up to 12 characters long. You can select from preset keywords if they have been registered in System Administration mode.

■Select Keyword

Displays the [Select Keyword] screen. Select a keyword registered in System Administration mode to search for job flows. Job flows that fully match the entry are searched. The machine searches through keywords that were registered upon each job flow creation.

■Sheet Filtering

Displays the [Sheet Filtering] screen on which you can filter the job flow sheets displayed.

Refer to "[Sheet Filtering] Screen" (P.342).

[Change Settings] Screen

1 Select [Change Settings].

Name	Updated:	Search by Name
🖏 Name1	2011/1/29	A
🖥 Name2	2011/1/29	Search by Keyword
🖏 Name3	2011/1/29	A Select
骗 Name4	2011/1/29	Keyword
🖏 Name5	2011/1/29	Sheet Filtering. Options Selected

2 Select a group to be changed from [Group of Items].

- The screen shown on the right does not appear if only one group is registered.
- Change Settings
 Close

 Group of Items
 1.

 1.
 Name2 Grp1

 2.
 Name2 Grp2

 3.
 Name2 Grp3

 4.
 Name2 Grp4

 5.
 Name2 Grp5

 6.
 Name2 Grp6
- Job Flow Sheets

- **3** Select the item to be changed.
 - Note A triangle icon appears at the left of each mandatory item.



4 Select any option.

∎ltems

Displays the items set for the job flow sheet.

■Current Settings

Displays the values set for the job flow sheet.

Previous Group

Displays the items of the previous group.

Next Group

Displays the items of the next group.

■Add E-mail Recipient

Adds recipients for the e-mail.

Note

[Sheet Filtering] Screen

This screen allows you to filter the job flow sheets displayed.

Job flow sheets displayed vary depending on the settings of the Authentication feature. For more information, refer to "14 Authentication and Accounting Features" > "Authentication for Job Flow Sheets and Folders" > "Overview" > "Job Flow Sheet Types and Overview" in the Administrator Guide.

1 Select [Sheet Filtering].

- Job Flow Sheets Search by Nam Name Updated: 🖏 Name1 2011/1/29 Search by Keyword 🖏 Name2 2011/1/29 ፍ Name3 2011/1/29 M Select Keyword... 🖷 Name4 2011/1/29 Sheet Filtering. 🖏 Name5 2011/1/29 v Options Selected i Details... Refresh K Change Settings
- **2** Select the filtering conditions, and select [Save].

🥫 Sheet Filtering		💢 Cancel	🖉 🎸 Σανε
Owner	Target		
System Administrator	Scan Jobs		
Non-System Administrator	External Application		
	Copy Jobs		

■Owner

Select the owner of job flow sheets to filter.

■Target

Select the target of job flow sheets to filter.

Note • Job flow sheets whose [Target] is [Folder] can only be used from [Send from Folder].

8 Stored Programming

This chapter describes the Stored Programming service which enables you to store customized job settings.

Stored Programming Overview

The Stored Programming service allows you to store settings that you will most likely use frequently and allows you to call them with a single button operation. You can also assign a screen to a stored program button, to use the button as a short-cut to the screen.

A stored program can store not only settings of a feature, but a flow of settings configured on multiple screens.

For example, this service is available when you want to record a procedure starting from pressing the <Machine Status> button, to displaying the screen under [Print Reports] to print a Job History Report.

In addition, while Build Job is running, this service can be used for the remaining document stacks.

For information on Build Job, refer to "Build Job (Processing Documents Scanned with Different Settings as One Job)" (P.141).


The following shows the reference section for each feature.

Registering/Deleting/Renaming Stored Programs	345
Calling a Stored Program	351

Registering/Deleting/Renaming Stored Programs

You can register and delete stored programs on the [Stored Programming] screen.

1 Press the <Services Home> button.



<Services Home> button



🖌 Setup	an a	🔶 Close
Setup	Group	
	Create Folder ▲	
	Stored Programming	
	Create Job Flow Sheet	
	Add Address Book Entry	
	Create Fax Group Recipients	
	Add Fax Comment	

Available>
 Available>

4. <Available>

5. <Available>

6. <Available>

💥 Job Store

Store Build Job

Enter / Change

Assign / Change Icon

Delete

3 Select [Stored Programming].

4 Select a feature.

2 Select [Setup].

■Store

Register a stored program. Refer to "Registering Stored Programs" (P.346).

■Store Build Job

Register a stored program for Build Job. Refer to "Registering Stored Programs for Build Job" (P.348).

■Delete

Deletes a stored program. Select the stored program number to be deleted. Refer to "Deleting Stored Programs" (P.348).

Enter/Change Name

Enter or change the name of a stored program. Refer to "Entering/Changing a Stored Program Name" (P.349). Close

■Assign/Change Icon

Specify an icon for a registered stored program. Refer to "Assigning/Changing Icons for Stored Programs" (P.350).

Registering Stored Programs

Up to 100 actions can be registered with one stored program. Up to 40 stored programs can be registered in the machine.

Actions registered in stored programs No.1 and 2 or No. 1 to No.12 can also be performed by using one touch buttons <M01> and <M02> or <61> to <M02>. (This feature is available only when the optional Fax service is installed.)

The following describes how to register actions with stored programs.

Important • If registered settings such as tray paper size and comments, or default values in the System Settings are changed after a stored program is registered, the contents of the program also change.

Note

- Services using System Settings, Job Flow Sheet, Network Scanning, or Address Book cannot be registered.
 - The registering procedure for a stored program is canceled when the <Interrupt> button is pressed, the Auto Clear feature causes a time-out, or a pop-up window (paper jam, etc.) appears.
 - There are two ways in which address numbers and stored programs are assigned to the one touch buttons. Select either of the following. By default, [Type 1] is selected. For information on how to change the settings registered to the one touch buttons, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" in the Administrator Guide.
 - [Type 1]

Buttons 1 to 70 are used for address numbers and they correspond to the registered address numbers 0001 to 0070, while buttons M01 and M02 are used for stored programs and correspond to the registered stored programs 1 and 2.

• [Type 2]

Buttons 1 to 60 are used for address numbers and they correspond to the registered address numbers 0001 to 0060, while buttons 61 to 70, M01, and M02 are used for stored programs and correspond to the registered stored programs 1 to 12.

1 Select [Store].

Note

🖌 Job Store		
Store	1. (No Name)	
Store Build Job	2. <available></available>	
Delete	3. <available></available>	
	4. <available></available>	
Enter / Change Name	5. <available></available>	
Assign / Change Icon	6. <available></available>	

- **2** Select a number to register a stored program.
 - Once a job is stored to a button, it cannot be overwritten.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
- **3** Set the feature you want to register.

• The machine sounds an audible tone while a stored program is being registered.

• Press the <Interrupt> button to cancel registration.

You can change the volume of the sound that notifies that a stored program is being registered. For information on the setting, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Stored Programming Tone" in the Administrator Guide.

4 Press the <Start> or <Clear All> button.

Note • If no name is entered for a registered stored program, the name becomes "(No Name)". For information on how to enter a name for registered stored programs, refer to "Entering/Changing a Stored Program Name" (P.349).

Notes and Restrictions on Registering Stored Programs

The following notes and restrictions applies when you register stored programs.

- When registering a stored program to select a paper size or type loaded on the bypass tray, register both the paper size and the paper type. If only the paper size or type is registered, the stored program may not be called properly.
- If any of the following operations are performed while a stored program is being registered, the stored program may not be registered or may not work correctly.
 - Removing or inserting a paper tray
 - Loading or reloading paper in the bypass tray
- If any of the following operations are performed after a stored program is registered, the registered stored program may not be called properly.
 - If the stored program has the Watermark feature and the default values of that feature are changed.
 - If the stored program has an operation for a folder and the folder passcode is changed.
 - If the settings of the control panel are changed.
 - If the services assigned to the Custom buttons are changed.
 - If any setting is changed under [Tools] > [System Settings] > [Copy Service Settings] > [Preset Buttons].
 - If the selection is made from the list view of the Address Book or Job Flow Sheet.
 - If any optional components installed on the machine, such as a finisher, are changed, and thereby the associated buttons become no longer available.
 - If the measurement unit, millimeters or inches, is changed.
 - If a job is selected from the list of the stored jobs in [Secure Print Jobs & More] under Job Status.
- The following features and operations cannot be registered in Stored Programming.
 - Registration and call of a stored program
 - System Settings
 - The [Media Print Text] on the [Services Home] screen
 - The [Store to USB] button on the [Services Home] screen
 - The [Network Scanning], [Job Flow Sheets], and [Web Applications] buttons on the [Services Home] screen (ApeosPort series only)
 - The Custom button to which the Network Scanning or Job Flow Sheets service is assigned
 - The Address Book for the Fax/Internet Fax, E-mail, and Scan to PC services
 - Buttons that cannot be selected
 - The [Language] button on the [Services Home] screen
 - The [Screen Brightness] button on the [Services Home] screen
 - Selecting items using the scroll bar
 - Scrolling operation while previewing
 - The [Browse] button for the Scan to PC service
 - Operations to edit e-mail addresses for the E-mail service (the pop-up menu [Keyboard], [Remove], and [Edit] displayed by selecting [Recipient(s)] or [From])

Stored Programming

8

- The <Energy Saver> button
- Registration of a stored program is canceled when the <Interrupt> button is pressed, the Auto Clear feature causes a time-out, or a pop-up window (such as a paper jam window) appears.
- If the Fax service is available, one touch buttons can be used.

Registering Stored Programs for Build Job

Up to 100 actions can be registered with one stored program for Build Job. Up to 40 stored programs can be registered in the machine.

The following describes how to register actions with stored programs.

- **1** Select [Store Build Job].
 - Note Once a job is stored to a button, it cannot be overwritten.
 - Select [▲] to return to the previous screen or [♥] to move to the next screen.

🔀 Job Store		Close
Store	1. (No Name)	A
Store Build Job	2. <available></available>	
Delete	3. <available></available>	
Enter / Change	4. <available></available>	
Name	5. <available></available>	
Assign / Change Icon	6. <available></available>	•

- **2** Select a number to register a stored program.
 - Once a job is stored to a button, it cannot be overwritten.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
- **3** Set the feature you want to register.
 - Note The machine sounds an audible tone while a stored program is being registered.
 - Press the <Interrupt> button to cancel registration.

You can change the volume of the sound that notifies that a stored program is being registered. For information on the settings, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Stored Programming Tone" in the Administrator Guide.

4 Press the <Start> or <Clear All> button.

• An icon is displayed to the left of each registered stored program for Build Job.

• If no name is entered for a registered stored program, "No Name" is saved as the name. For information on how to enter a name for registered stored program, refer to "Entering/Changing a Stored Program Name" (P.349).

Deleting Stored Programs

Note

Note


The following describes how to delete stored programs.

1 Select [Delete].

🖌 Job Store		Close
Store	1. (No Name)	A
Store Build Job	2. <available></available>	
Delete	3. <available></available>	
Enter / Change	4. <available></available>	
Name	5. <available></available>	
Assign / Change Icon	6. <available></available>	Ŧ

- **2** Select the number to delete.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.

3 Select [Delete].

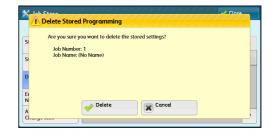

■Delete

Deletes the stored program.

Note • Once a stored program is deleted, it cannot be restored.

■Cancel

Cancels deletion of the stored program.

Entering/Changing a Stored Program Name

The following describes how to enter or change the name of a stored program. Up to 36 characters can be entered for a stored program's name.

For information on how to enter characters, refer to "Entering Text" (P.68).

1 Select [Enter/Change Name].

🔀 Job Store		Close
Store	1. (No Name)	
Store Build Job	2. <available></available>	
Delete	3. <available></available>	
Enter / Change Name	4. <available></available>	
Assign / Change Icon	6. <available></available>	•

2 Select the number to register or change a name.

Note • Select [▲] to return to the previous screen or [▼] to move to the next screen.

3 Enter a name, and select [Save].

Change Name			💢 Cancel	Save 💞
				Oelete Text
· 1 2 3	4 5	6 7 8 9	0.	Backspace
\ q w	e r t	y u i	o] p] [
a s	d f	g h j k	t ;	• @
Shift z	x c v	b n m	, . /	Shift
Qwerty abc		Space 🗰	-	

Assigning/Changing Icons for Stored Programs

The following describes how to assign or change an icon of a stored program. You can select from 12 icons.

1 Select [Assign/Change Icon].

🖌 Job Store	****	🗸 Close
Store	1. (No Name)	A
Store Build Job	2. <available></available>	
Delete	3. <available></available>	
Enter / Change Name	4. <available></available>	
Assign / Change Icon	6. <available></available>	

2 Select the number to assign or change an icon.

Note • Select [▲] to return to the previous screen or [▼] to move to the next screen.

3 Select an icon, and select [Save].

Assign / Cha	Assign / Change Icon - Job Number 1		💢 Cancel	🧹 🔗
No Icon		3		
1				
0	۰.	4		
2				

■No Icon

No icon is assigned to the registered stored program.

∎lcon


Select an icon according to the content of the registered stored program.

Calling a Stored Program

The following describes how to call a stored program.

When you call a specified stored program, the last screen shown when you registered the stored program appears.

1 Press the <Services Home> button.





1. (No Name)

Stored Programming **CO**

۳

2 Select [Stored Programming].

3 Select the number of the stored program containing the features you want to use.


- You can only select registered numbers.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - After the stored program has been called, the machine sounds an audible tone. If a failure occurs, the machine sounds a fault tone.

📴 Stored Progra

For information on how to change the volume of the sound that notifies that a stored program has been called, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Stored Programming Complete Tone" in the Administrator Guide.

- **4** After the stored program is called, select other features if necessary.
- **5** Press the <Start> button.

Note





Calling a Stored Program for Build Job

You can call a stored program for Build Job on the [Copy] screen displayed while Build Job is running.

1 Select [Change Settings].

i Copy		File 00096	Close
Quantity:	20/300	🤝 Sample Job	
Pages:	40/50		Delete
Originals:	50		
	(A4 🗇)		Last Original
ш1 А4.⊐ 100%			Next Original
Collated			Start Start
=_ Chapte	r Start D Insert Separators.	Change Quantity	Change Settings

- **2** Select the [Job Assembly] tab.
- **3** Select [Stored Programming].
- **4** Select the number of the stored program containing the features you want to use.
 - You can only select registered numbers.
 - After the stored program has been called, the machine sounds an audible tone. If a failure occurs, the machine sounds a fault tone.

For information on how to change the volume of the sound that notifies that a stored program has been called, refer to "5 Tools" > "Common Service Settings" > "Audio Tones" > "Stored Programming Complete Tone" in the Administrator Guide.

9 Web Applications

This chapter describes how to operate web applications.

• This service is supported only by the ApeosPort series.

- This service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.

- Accessing Using Buttons Registered on the [Services Home] Screen.....356

Web Applications Overview

Web Applications is a service that allows you to access to web applications via a network using the browser on the machine in order to display and store data.

The machine provides the following features:

- Accessing web applications from the machine, and displaying the web application screen on the machine
- · Storing scanned documents directly in a web application folder
- · Printing a file directly that is stored on a remote server
- The web applications that can be displayed on the machine are those which are compatible with the machine. You cannot access websites on the Internet.

To access the web application on the machine, prior settings are required. For information on the settings, refer to "5 Tools" > "Web Applications Service Setup" in the Administrator Guide.

Accessing Web Applications

The following describes how to access web applications.


You need to register an access destination in advance.

For information on how to register an access destination, refer to "5 Tools" > "Web Applications Service Setup" > "Server Setup" in the Administrator Guide.

ork Scan

Media Print - Text

1 Press the <Services Home> button.



Store & Send Link

WSD

Store to WSD

2

Store to USE

-

Job Flow Sheets

Web Applicati

2 Select [Web Applications].

- **Note** If Auto Link has been set, the machine can access the remote service.
- **3** Select an access destination.

Server Name	URL	
WebService01	http://www.test01	
WebService11	http://www.test11	
WebService21	http://www.test21	
WebService31	http://www.test31	
WebService41	http://www.test41	

4 Select [Open] from the pop-up menu displayed.

Server Name		
WebService01	st01	
WebService11	st11	
WebService21	Close Menu	
WebService31	http://www.test31	
WebService41	http://www.test41	
WebService51	http://www.test51	

■Open

Accesses the specified remote service.

■Details

Displays information on the specified remote service.

■Close Menu

Hides the pop-up menu.

Language

Screen Brightness

Setup

Activity Report

Fax Receiving Mode


Print Mode

Accessing Using Buttons Registered on the [Services Home] Screen

You can register frequently used web applications on the [Services Home] screen as buttons. The following describes how to access the applications by simply selecting the buttons.

For information on how to assign the buttons displayed on the [Services Home] screen, refer to "5 Tools" > "Common Service Settings" > "Screen/Button Settings" > "Services Home" in the Administrator Guide.

1 Press the <Services Home> button.



<Services Home> button

- **2** Select [Head Office] registered on the [Services Home] screen.
 - Note
- In this example, an access destination named [Head Office] is registered in the default position of the [Web Applications] button. You can assign the button anywhere on the screen.



10 Media Print (Text)

This chapter describes the basic procedures and features of the Media Print - Text service when the USB Media Print Kit is installed.

Note	This service is not available for some models. An o For more information, contact our Customer Suppo	
• Me	dia Print Overview	
• Inse	erting USB Memory Device	
• Sel	ecting Files	
• Set	tting the Printing Options	

Media Print Overview

Installation of the USB Media Print Kit (optional) allows the machine to retrieve and print document files (PDF, TIFF, XPS, XDW(XBD), and JPEG (JFIF)). This feature is called Media Print.

When a USB memory device is connected to the machine, the data stored in the USB memory device can also be printed. You can also print scanned data stored with the Store to USB service.

Important • Data stored in media may be lost or damaged in the following cases. Make sure to back up the data in the media before use.

- When ejecting the medium, switching the power off/on, or disconnecting/connecting the USB cables by methods other than those described in this guide
- When switching the machine off/on or disconnecting/connecting the USB memory device
- When receiving the effect of electrical noise or an electrical discharge
- When a failure occurs or repairing
- · When receiving damage resulting from a natural disaster
- We assume no responsibility for any direct or indirect damages arising from or caused by such data loss.
- When you use the Media Print Text service to print scanned data stored with the Store to USB service, the data cannot be printed if it has been saved in DocuWorks format.
- For Media Print Text, files cannot be displayed in thumbnail view and cannot be previewed.

Note

- The Media Print service is not available for some models. An optional component is required. For more information, contact our Customer Support Center.
- You can use a commercially available single-slot^{*1} Memory Card Reader, but the operation is not guaranteed. When you use a multi-slot^{*2} Memory Card Reader, only one of those slots can be recognized. The slot to be used differs depending on the card readers. Some of the media and slots of Memory Card Readers may not be used on the machine, and the operation is not guaranteed.
 - *1: Media/Memory Card Reader that has one slot. Some allow only one type of media/ Memory Card, while others allow more than one types (ex. SD card, xD-Picture Card).
 - *2: Media/Memory Card Reader that has two or more slots.
- This feature may not be available depending on the setting in the CentreWare Internet Services. For more information, refer to "6 CentreWare Internet Services Settings" > "Configuring Machine Settings Using CentreWare Internet Services" in the Administrator Guide.

The Media Print feature includes the Media Print - Text mode that prints data stored in text format. It also includes Index Printing that prints a list of files retrieved in the mode.

Supported File Formats

The following file formats are available:

· PDF files

Extension: pdf, PDF 1.3 or later

• TIFF files

Extension: tif, Grayscale 4 bit/8 bit uncompressed, 8 bit/24 bit JPEG compressed, MH/MMR compressed

XPS files

Extension: xps

 DocuWorks files Extension: xdw • DocuWorks binder files

Extension: xbd

• JPEG (JFIF) files

Extension: jpg

- Important When specifying a destination, only folder names appear on the destination list. File names and shortcuts (symbolic link and alias) do not appear on the list. If the medium contains more than 900 folders, the machine may not be able to recognize them correctly.
 - PDF files, TIFF files, or JPEG (JFIF) files cannot be printed if they are stored in folders.
 - If a file name contains characters that are not supported by the machine, the file name will not be displayed on the screen.
- Note Up to 255 characters can be recognized as a file name.
 - Up to 900 files can be processed with Media Print.
 - Use media formatted with computers (FAT12, FAT16, FAT32 only).
 - Use USB 2.0 compliant memory devices with the size up to 128GB only. (USB 1.1 compliant memory devices are not supported.)
 - If a file name contains machine-dependent codes, the file may not be recognized or displayed on the screen correctly.

Notes and Restrictions

The following notes and restrictions apply on the use of the Media Print - Text feature.

- If the medium fails, the process is terminated within a few minutes, and an error message is displayed.
- Eject the medium before switching off the power.
- Be sure to wait until printing is completed and then eject the medium by following the procedure described in this chapter.
- Always back up the data in a medium before use.
- Printing data may take from a few minutes to several tens of minutes, depending on the size and number of files on the medium.
- Before storing document files, format the medium with a computer.
- When you print a PDF file using Media Print, [PDF Bridge] is selected regardless of the [Print Processing Mode] setting in [PDF Direct Print].
 For more information on [Print Processing Mode], refer to "16 Appendix" > "PDF Direct Print" in the Administrator Guide.
- You can use a USB host adapter to print from your USB memory device or via your USB cable (as necessary), but the operation is not guaranteed.
- Multiple USB memory devices cannot be used simultaneously.
- Use USB 2.0 compliant memory devices only. USB 1.1 compliant memory devices are not supported.

The following USB memory devices are not supported:

- A USB memory device with multiple media partitions that require other utilities to access to the contents therein.
- A USB memory device connected via an external hub.
- Do not use a medium if it stores data that cannot be backed up, such as music data with the copyright protection function. We assume no responsibility for any direct or indirect damages arising from or caused by such data loss.
- The machine does not display a menu to prevent you from removing a USB memory device while it is being accessed.

Inserting USB Memory Device

Note

- **1** Insert the USB memory device into the USB memory slot on the control panel.
- **2** One of the following occurs.
 - The [USB Device Detected] screen appears.
 - The [Store to USB] screen appears.
 - The [Media Print Text] screen appears.
 - The screen display does not change.
 - The behavior depends on the settings. Ask your system administrator for more information.
 - When a USB memory device is inserted into the USB memory slot during Energy Saver mode, the touch screen does not light up. After exiting Energy Saver mode by pressing the <Energy Saver> button, insert the USB memory device again or select the [Store to USB] on the [Services Home] screen. For information on other ways to exit Energy Saver mode, refer to "Exiting Energy Saver Mode" (P.58).
 - The screen status will be one of the above even when a USB memory device in which only encrypted data is stored is inserted or a USB memory device in unsupported format is inserted. In such cases, a warning message appears during operation and the operation is aborted.
 - The screen status will be one of the above when a commercially available Memory Card Reader is inserted into the USB memory slot of the machine. It is the same if no media is inserted into the Memory Card Reader.
 - If a commercially available Memory Card Reader is used and left inserted all the time, the machine will not detect media even when it is inserted into the slot of the Memory Card Reader.
 - The screen display remains the same when the inserted USB memory device or Memory Card is removed. Press the <Services Home> button or perform another operation to change the screen display before starting the next operation.

When the [USB Device Detected] Screen Appears

1 Select [Media Print - Text].



2 The [Media Print - Text] screen appears.

Select All	-	 Name 	Last Updated	
Select From	001	IMAGE_1.JPG	2011/04/8 19:02	
List Select Range	002	IMAGE_2.JPG	2011/04/8 19:02	
Select Kunge	003	IMAGE_3.JPG	2011/04/8 19:02	
Index Print				

When the [Store to USB] Screen Appears

Press the <Services Home> button.

Select [Media Print -Text] on the [Services

The [Media Print - Text] screen appears.

1

2

3


Home] screen.

 Store to USB
 Advanced Settings
 Layout Adjustment
 Filing Options


 Save in...
 /

 Image: Details...

 Image: Details...



Language Store & Send Link Screen Brightness Store to USB work Scan Setup Ŀ 2/2 Media Prin - Text Job Flow Sheets Activity Report WSD Fax Receiving Mode Store to WSD Web Application Print Mode

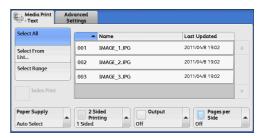

When the [Media Print - Text] Screen Appears


Select a feature on the [Media Print - Text] screen.

Select All	· · ·	 Name 	Last Updated	
Select From	001	IMAGE_1.JPG	2011/04/8 19:02	
List	002	IMAGE_2.JPG	2011/04/8 19:02	1
Select Range	003	IMAGE_3.JPG	2011/04/8 19:02	1
Index Print				

Media Print (Text)

When the Screen Display Does Not Change

1 If any screen other than the [Services Home] screen is displayed, press the <Services Home> button.




<Services Home> button

2 Select [Media Print - Text] on the [Services Home] screen.



3 The [Media Print - Text] screen appears..

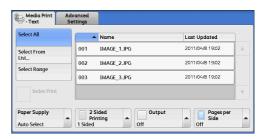

- **Important** Data stored in a USB memory device may be lost or damaged in the following cases. Make sure to back up the data in the device before use.
 - When ejecting the medium or switching the power off/on by methods other than those described in this guide.
 - When receiving the effect of electrical noise or an electrical discharge
 - When a failure occurs or repairing
 - When receiving damage resulting from a natural disaster
 - We assume no responsibility for any direct or indirect damages arising from or caused by such data loss.
- Note If you do not specify the file storage location, the scanned data is saved in the root directory.

Selecting Files

You can select files using any of the following three methods:

- Selecting all files
- · Selecting the desired files on the [Select From List] screen
- · Selecting one file or a range of files with index numbers
- Note You can select up to 32 files simultaneously.
- **1** Select [Select All], [Select From List], or [Select Range] to specify files.

Hedia Print	Advanced Settings	
Select All	▲ Name	Last Updated
Select From	001 IMAGE_1.JPG	2011/04/8 19:02
List	002 IMAGE_2.JPG	2011/04/8 19:02
Select Range	003 IMAGE_3.JPG	2011/04/8 19:02
Index Print		
Paper Supply	 Printing 	Pages per Side
Auto Select	1 Sided Off	Off

2 After selecting the files to be printed, set the printing options.

For more information on the printing options, refer to "Setting the Printing Options" (P.365).

- On the pop-up menu displayed when selecting files, you can cancel the selection or display the details of a file.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.

■Select All

Selects all files to be printed.

Note • Depending on the types of files stored on the USB memory device or the directory configuration, some files may not be printed.

■Select From List

Displays the [Select From List] screen. Refer to "[Select From List] Screen" (P.364).

■Select Range

Use [+] and [-] to specify the range of files to be printed in [First File] and [Last File].

Note • Select [Select From List] to display a list of files. You can reference the list when selecting the range of files to be printed.

■Index Print

Prints a list of the selected files with the index numbers automatically assigned.

• For more information on Index Print, refer to "Index Print" (P.366).

[Select From List] Screen

This screen displays a list of files with the folder and file names and stored dates and times.

You can select the desired files from the list.

1 Select the desired files from a list of files.

Select From List		Cancel	🎺 Save
/Folder1/			
🗎 # 🔺 Name	Last Updated		Select all files
001 IMAGE_1.JPG	2011/04/8 19:02		Details
002 IMAGE_2.JPG	2011/04/8 19:02		
003 IMAGE_3.JPG	2011/04/8 19:02		
			Previous
			Next

Note

- Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can sort the list in ascending or descending order by selecting [# ▲], [Name], or [Last Updated].
 - A check mark is placed in the check box for each file selected. To deselect the file, select the file again while the file is selected (highlighted).
 - If a folder or file name has more than 170 characters, the folder or file name is not displayed.
 - Folder names which include characters that the machine does not support may not be correctly displayed. If you specify the folders as file storage locations, an error will occur. For more information on characters that the machine supports, refer to "Entering Text" (P.68).
 - The machine does not distinguish between upper and lower cases of folder and file names that are created in a Windows environment and that consist of eight characters or less. The names for these folders and files are displayed in capital letters.

Details

Displays detailed information on the selected (highlighted) file. To print the file, select the [Print] check box on the [Details] screen.

■Select all files in this level

Selects all the files in the current folder.

■Previous

Allows you to move to the upper directory.

• This button is grayed out if there is no upper directory.

■Next

Allows you to move to the lower directory.

• This button is available when a folder is selected.

Setting the Printing Options

You can set the printing options on the [Media Print - Text] and [Advanced Settings] tabs.

By default, pressing the <Review> button on the control panel allows you to view a list of the setting values.

Media Print - Text

Tab	ltem	Setting Value
-	Quantity	Specify the number of print sets in the range from 1 - 999, using the numeric keypad.
Media Print Text	Paper Supply	Trays 1 - 6
		Note • Select [Auto Select] or a tray in which any of the following sizes of paper is loaded: A3, B4, A4, A4 ^① , B5, B5 ^① , A5, 8.5 x 11", 8.5 x 11" ^① , 8.5 x 14", 11 x 17"
		 When you select [Auto Select], the machine automatically selects a tray that contains the same size of paper as the document, and prints the document at its original size.
		• When the desired tray is not displayed, select [More], and on the screen displayed, select the tray.
		If you select [More] and then [Bypass], you can set [Paper Size] and [Paper Type].
		● Paper Size A3, B4, A4, A4岱, B5, B5岱, A5, A5岱
		Paper Type
		Select the paper type to be used from the list.
	2 Sided Printing	Off, Long Edge Flip, Short Edge Flip
	Output	Specify the stapling/hole-punching positions. When the desired stapling/hole-punching positions are not displayed, select [More].
		Important • If you select and print multiple documents, all of the documents are stapled together. To staple only one document, print only that document.
	Pages per Side	Off, 2 Pages, 4 Pages
Advanced Settings	Bitmap Smoothing	Off, On

Note

• When you select a paper size smaller than the document size, the document image is automatically reduced. When you select a paper size larger than the document size, the document is printed at its original size.

• Features displayed on the [Media Print - Text] and [Advanced Settings] screens may vary depending on the combination of the options installed on the machine.

Index Print

For Index Print, file names, dates when the files were stored on the USB memory device, and the total number of files are printed.

You can specify only the number of print sets for Index Print, in the range from 1 - 999 sets in 1 set increments. For other printing options, the settings you have specified for Media Print - Text before selecting the [Index Print] check box will be effective. To change these settings, deselect the [Index Print] check box, change the print settings, and then perform Index Print. The setting values return to the defaults if the machine is rebooted.

The following setting items are restricted when you select Index Print.

Setting Item	Value
Paper Supply	Trays 1 - 6
	Note • Select the tray in which any of the following sizes of paper is loaded: A3, A4, A4 ^[] , 8.5 x 11", or 8.5 x 11" ^[]
Output	Not available
Pages per Side	Not available

11 Job Status


This chapter describes how to check the status of jobs and operate the jobs.

Job Status Overview	.368
Checking Current/Pending Jobs	.369
Checking Completed Jobs	.371
Printing and Deleting Stored Jobs	.372
Printing Pending Jobs	.385
Handling Error Terminations	.386
	Checking Current/Pending Jobs Checking Completed Jobs Printing and Deleting Stored Jobs Printing Pending Jobs

Job Status Overview

The Job Status feature allows you to check current, pending, and completed jobs. You can also cancel printing and print jobs that are waiting to be output or resumed.

1 Press the <Job Status> button.



<Job Status> button

You can operate the following on the [Job Status] screen.

■Checking current/pending jobs

Lists current and pending jobs, and displays the details. Also allows you to cancel current or pending jobs.

For more information, refer to "Checking Current/Pending Jobs" (P.369).

Checking completed jobs

Displays the status of completed jobs, and the details. For more information, refer to "Checking Completed Jobs" (P.371).

■Checking stored jobs

Prints or deletes jobs stored using the Charge Print, Secure Print, Private Charge Print, Sample Set, and Delayed Print features.

For more information, refer to "Printing and Deleting Stored Jobs" (P.372).

Printing pending jobs


Prints jobs that are waiting to be output or resumed. For more information, refer to "Printing Pending Jobs" (P.385).

Checking Current/Pending Jobs


This section describes how to check current or pending jobs. On the status screen, you can cancel or preferentially execute jobs.

Active Jobs

1 Press the <Job Status> button.



- Note Sele
 - Select [▲] to return to the previous screen or [♥] to move to the next screen.
 From the drop-down menu, you can
 - select and display the desired type of jobs.
- **3** Select [Delete] or [Promote Job].



Completed Secure Print Jobs Jobs & More

 File / Job Type
 Remote Terminal
 Status
 Progress

 02222 · Copy
 11x2zmm:3%
 Copying
 55/66

 02223 · Print
 11x2zmm:3%
 Print Wait
 66

 Cost information
 XXXXXX
 XXXXXX
 Y

Close

Print Waiting Jobs



Print Waiting Jobs

Prints the jobs that are waiting to be output or resumed. For more information, refer to "Printing Pending Jobs" (P.385).

■Delete

Cancels the current or pending job.

■Promote Job

Preferentially executes the selected job.

If you select this button, [1] appears under the [Status] of the selected job.

■Delete

Stops processing the job.

■Last Original

Select this button to end scanning of documents. The job is then executed.

Next Original

Select this button when you have another document to scan.

■Start

Resumes the suspended job.

■Change Quantity


Displays the [Change Quantity] screen on which you can change the number of copies entered before. Enter a new quantity using the numeric keypad.

Checking Completed Jobs

This section describes how to check completed jobs.

You can check whether a job has been completed successfully. Selecting a job allows you to see its details.

1 Press the <Job Status> button.



2 Select the [Completed Jobs] tab.

- Note
- Select [▲] to return to the previous screen or [▼] to move to the next screen.

• From the drop-down menu, you can select and display the desired type of jobs.

<job status=""> button</job>

Active Jobs Comple Jobs			Close
All Jobs	•	🥜 Group	Parent Jobs
File / Job Type	Remote Terminal	Status	Pages
Сору	A4	Completed	1/1
Secure Print	BARUTAN:HOST NAME	Completed	2/3
33333 - Print Fax		Completed	
22222 - Print Fax	Fax Received	Completed	
02222 - Receive Fax Relay	FAX_TRNSMSSN_RCV11	Completed	

- **3** Select a job to see the details.
- **4** Select [Close] after confirmation.

Сору		P Close
Driginal Size	: A4 D	1
Output Color	: Black & White	
Status	: Completed	Time Completed :2011/1/26 3:35 PM
Quantity	:1/1	
Pages	:1/1	Print this Job History Report
Paper	: ш 3 А4	

■Group Parent Jobs

Allows you to check the list or history of related jobs (such as job flow jobs).

Show Children Jobs

Displays a job list.

■Print this Job History Report

Prints the Job History Report.

Print this Job Report

Prints the Job Report.

Printing and Deleting Stored Jobs


This section describes how to print or delete jobs stored with the Secure Print or Sample Set feature, or stored with the [Receive Control] setting of the Charge Print feature. The [Secure Print Jobs & More] screen allows you to print or delete stored jobs.

Note • This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

The following shows the reference section for each feature.

Secure Print	
Sample Set	
Delayed Print	
Charge Print	
Private Charge Print	
Public Folder	
Undelivered Faxes	

1 Press the <Job Status> button.



2 Select the [Secure Print Jobs & More] tab.

<Job Status> button

Completed Jobs	Secure Print Jobs & More	
rge Print	Sample Set	Delayed Print
	Public Folder	Undelivered Faxes
) (
	rge Print	rge Print

[Secure Print] and [Private Charge Print] are not displayed simultaneously on the screen. For more information on the settings, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.

Secure Print

Note

This feature allows you to temporarily store print data in the machine to print it with the print command from the machine. The feature also enables you to set a passcode, which is helpful when printing confidential documents.

The following describes how to print or delete jobs stored with the Secure Print feature.

- This feature does not appear when [Receive Control] in [Charge/Private Print Settings] is set to either of the following:
 - Select [According to Print Auditron], and then select [Save as Private Charge Print Job] in [Job Login Success].
 - Select [Save as Private Charge Print Job].

When [Save as Private Charge Print Job] or [Save as Charge Print Job] is selected in [Receive Control] under [Charge/Private Print Settings], jobs will not be saved in [Secure Print] under [Secure Print Jobs & More] even if you select [Secure Print] on the print driver. For more information, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.

For information on how to operate a Secure Print job, refer to the print driver's help.

- **1** Select [Secure Print].
- 2 Select the user to check, and select [Job List].
 - Note Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can enter a user ID in [Go to] using the numeric keypad to display the user ID at the top of the list.
- **3** Enter the passcode, and select [Confirm].
 - If a passcode is not set, the passcode entry screen does not appear.

Secure Print		🔇 Refresh	🧼 💛 Close
			oto 1⇔200
001 User Name1	002 User Name2		
003 User Name3	004 User Name4	ol	bs: 300
005 User Name5	006 User Name6		
007 User Name7	008 User Name8		
009 User Name9	010 User Name10		
011 User Name11	012 User Name12	V [Job List

😼 User Name1		💢 Cancel	🖉 🔗 Confirm
	Passcode		

- **4** Select the job to be printed or deleted.
 - Note You can select up to 100 files simultaneously to print or delete the files. If you select multiple files, they are printed in the selected order.

ę	Use	er Name1		🔇 Refr	esh	🤣 Close
		Job Name	Stored Date	Pages		Number of Jobs: ?8
	1.	Doc Name1012345678901234	2011/1/26 11:35 A	9999		Select All
	2.	Doc Name2012345678901234	2011/1/26 11:35 A	9999		Delete
	3.	Doc Name3012345678901234	2011/1/26 11:35 A	9999		Print Quantity
	4.	Doc Name4012345678901234	2011/1/26 11:35 A	9999		⇔ 9,999 Sets
	5.	Doc Name5012345678901234	2011/1/26 11:35 A	9999		10
	6.	Doc Name6012345678901234	2011/1/26 11:35 A	9999	•	Print
1						

- **5** Select any option.
- **6** When printing, specify the number of print sets using the numeric keypad.

■Select All

Selects all jobs. To deselect all the jobs, select this button again.

■Delete

Deletes the Secure Print job.

Note • If jobs with the same Billing ID are all deleted, the Billing ID will be deleted. Refer to "When [Delete] is Selected" (P.374).

Print Quantity

Specify the number of print sets.

■Print

Prints the Secure Print job. After printing, the job is deleted. Refer to "When [Print] is Selected" (P.374).

When [Delete] is Selected

1 Select [Delete].

(B) 11-	or Name1			Dafrach	Close	
<u> </u>	Delete Secure	Print Job(s)				
1 2 3	User ID: User Job Name: Do	ou want to delete th Name1 nc Name10123456 2011/1/26 11:35 AN	78901234567890	123456789012345	6789	,
4 5 6		Velete				

■Delete

Deletes the job.

Important • Once a job is deleted, it cannot be restored.

Cancel

Cancels deleting the job.

When [Print] is Selected

Note

- **1** Specify how to process the job after printing.
 - The screen shown on the right does not appear if [Print Job Confirmation Screen] is set to [Disabled] in System Administration mode. If [Disabled] is selected, the machine automatically deletes the job after printing without displaying the confirmation screen. For more information, refer to "5 Tools" > "Stored File Settings" > "Print Job Confirmation Screen" in the Administrator Guide.



■Print and Delete

Starts printing the job. The job is deleted after it is printed.

■Print and Save

Starts printing the job. The job is not deleted after it is printed.

■Cancel

Cancels printing the job.

Sample Set

Before printing multiple sets of a document, you can first print one set for trial, and then print the remaining sets from the machine.

The following describes how to print or delete jobs stored with the Sample Set feature. For information on how to operate a Sample Set job, refer to the print driver's help.

 Note
 • When [Save as Private Charge Print Job] or [Save as Charge Print Job] is selected in [Receive Control] under [Charge/Private Print Settings], jobs will not be saved in [Sample Set] under [Secure Print Jobs & More] even if you select [Sample Set] on the print driver.

For more information, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.

1 Select [Sample Set].

- **2** Select the user you want to check, and select [Job List].
 - Note Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can enter a user ID in [Go to] using the numeric keypad to display the user ID at the top of the list.
- **3** Select the job to be printed or deleted.
 - Note You can select up to 100 files simultaneously to print or delete the files. If you select multiple files, they are printed in the selected order.

Sample Set		Refresh	n 🔤 🧇 Close
			Goto)01⇔200
001 User Name1	002 User Name2		
003 User Name3	004 User Name4		lobs: 300
005 User Name5	006 User Name6		
007 User Name7	008 User Name8		
009 User Name9	010 User Name10		
011 User Name11	012 User Name12	•	Job List

≓u	ser Name1		🔇 Refresh	🖉 🤣 Close
	Job Name	Stored Date	Pages	Number of Jobs 28
1.	Doc Name1012345678901234	2011/1/26 11:35 A	9999	Select All
2.	Doc Name2012345678901234	2011/1/26 11:35 A	9999	Delete
3.	Doc Name3012345678901234	2011/1/26 11:35 A	9999	Delet Oursetite
4.	Doc Name4012345678901234	2011/1/26 11:35 A	9999	Print Quantity 1 ↔ 9,999 Sets
5.	Doc Name5012345678901234	2011/1/26 11:35 A	9999	10
6.	Doc Name6012345678901234	2011/1/26 11:35 A	9999 🔻	Print

- 4 Select any option.
- **5** When printing, specify the number of print sets using the numeric keypad.

■Select All

Selects all jobs. To deselect all the jobs, select this button again.

■Delete

Deletes the Sample Set job. Refer to "When [Delete] is Selected" (P.375).

Print Quantity

Specify the number of print sets using the numeric keypad.

■Print

Prints the Sample Set job. After printing the remaining sets of the job, the job is deleted. Refer to "When [Print] is Selected" (P.376).

When [Delete] is Selected

1 Select [Delete].



■Delete

Deletes the job.


Important • Once a job is deleted, it cannot be restored.

■Cancel

Cancels deleting the job.

When [Print] is Selected

- 1 Select [Yes].
 - Note The screen shown on the right does not appear if [Print Job Confirmation Screen] is set to [Disabled] in System Administration mode. If [Disabled] is selected, the machine automatically deletes the job after printing without displaying the confirmation screen. For more information, refer to "5 Tools" > "Stored File Settings" > "Print Job Confirmation Screen" in the Administrator Guide.

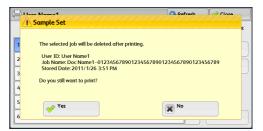

∎Yes

Starts printing the job. The job is deleted after it is printed.

After a sample set is output, the remaining sets will automatically be output if the machine is not instructed for the period specified in [Auto Job Release]. To prevent the remaining sets from being output automatically, set [Auto Job Release] to [Off]. For information on how to set [Auto Job Release], refer to "5 Tools" > "Common Service Settings" > "Machine Clock/ Timers" > "Auto Job Release" in the Administrator Guide.

■No

Cancels printing the job.

Delayed Print

This feature allows you to temporarily store print data on the machine to print it at a specified time.

Up to 100 jobs can be stored (queued) simultaneously for the Delayed Print feature. If the power is switched off when jobs are in queue (before the specified print time), the jobs for which the print time has elapsed will automatically be printed immediately after the power is switched on again.

The following describes how to print or delete jobs stored with the Delayed Print feature.

For information on how to operate a Delayed Print job, refer to the print driver's help.

- When [Save as Private Charge Print Job] or [Save as Charge Print Job] is selected in [Receive Control] under [Charge/Private Print Settings], jobs will not be saved in [Delayed Print] under [Secure Print Jobs & More] even if you select [Delayed Print] on the print driver. For more information, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.
- **1** Select [Delayed Print].
- **2** Select the job to be printed or deleted.
 - **Note** Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - [Print Time] shows the time to start printing.

		🔇 Refr	esh	🤣 Close
Job Name	Print Time	Pages		Number of Jobs: 28
Doc Name1012345678901234	3:55 PM	9999	*	
Doc Name2012345678901234	3:55 PM	9999		Delete
Doc Name3012345678901234	3:55 PM	9999		
Doc Name4012345678901234	3:55 PM	9999		
Doc Name5012345678901234	3:55 PM	9999		
Doc Name6012345678901234	3:55 PM	9999	•	Print
	Doc Name1012345678901234 Doc Name2012345678901234 Doc Name3012345678901234 Doc Name4012345678901234 Doc Name5012345678901234	Job Name Print Time Doc Name1-01234567890123 355 PM Doc Name2-01234567890124 355 PM Doc Name4-01234567890124 355 PM Doc Name5-01234567890124 355 PM Doc Name5-01234567890124 355 PM Doc Name5-01234567890124 355 PM	Doc Name1-012345678901234 355 FM 9999 Doc Name2-012345678901234 355 FM 9999 Doc Name3-012345678901234 355 FM 9999 Doc Name4-012345678901234 355 FM 9999 Doc Name4-012345678901234 355 FM 9999 Doc Name4-012345678901234 355 FM 9999 Doc Name5-012345678901234 355 FM 9999	Job Kulline Prink Time Puges Dock Name1-012345678901234 355 FM 9999 A Dock Name2-012345678901234 355 FM 9999 A Dock Name3-012345678901234 355 FM 9999 A Dock Name4-012345678901234 355 FM 9999 A Dock Name4-012345678901234 355 FM 9999 A Dock Name4-012345678901234 355 FM 9999 A

3 Select any option.

■Delete

Deletes the Delayed Print job. Refer to "When [Delete] is Selected" (P.377).

■Print

Prints the Delayed Print job. The job is deleted after it is printed. If printed manually, the job will not be printed at the specified time. Refer to "When [Print] is Selected" (P.377).

When [Delete] is Selected

1 Select [Delete].



■Delete

Deletes the job.

Important • Once a job is deleted, it cannot be restored.

Cancel

Cancels deleting the job.

When [Print] is Selected

1 Select [Yes].

Note

 The screen shown on the right does not appear if [Print Job Confirmation Screen] is set to [Disabled] in System Administration mode. If [Disabled] is selected, the machine automatically deletes the job after printing without displaying the confirmation screen. For more information, refer to "5 Tools" > "Stored File Settings" > "Print Job Confirmation Screen" in the Administrator Guide.



Job Status

∎Yes

Starts printing the job. The job is deleted after it is printed.

■No

Cancels printing the job.

Charge Print

This feature authenticates users on the machine to prevent unauthorized users from operating print jobs. When this feature is enabled, the machine prints only the jobs of authenticated users. You can also configure the machine to store print jobs temporarily, and then print them from the machine's control panel.

If received print jobs are set to be saved as Charge Print under [Tools] > [Authentication/Security Settings] > [Authentication] > [Charge/Private Print Settings] > [Receive Control], the jobs are saved for each Billing ID. Any jobs that were not given a Billing ID on the print driver are saved in [No User ID].

For more information on how to register user IDs on the machine, refer to "5 Tools" > "Accounting" > "Create/View User Accounts" in the Administrator Guide.

- Unlike the Private Charge Print feature, the Charge Print feature can store jobs without a user ID, such as e-mail printing and print jobs sent from ContentsBridge or CentreWare Internet Services, and can print the jobs after authenticating users.
 - [Charge Print] appears when [Save as Charge Print Job] is selected by using one of the following procedures in System Administration mode:
 - Selecting [Save as Charge Print Job] in [Receive Control].
 - Selecting [According to Print Auditron] in [Receive Control], and then selecting [Save as Charge Print Job] in [Job Login Failure].
 - Selecting [According to Print Auditron] or [Save as Private Charge Print Job] in [Receive Control], and then selecting [Save as Charge Print Job] in [Job without User ID].

For information on how to set Charge Print, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.

The following describes how to print and delete a job stored with the Charge Print feature.

- Press the <Log In/Out> button on the control panel, or select the login information field on the touch screen.
- **2** Enter the user ID, and select [Enter].
 - When a passcode is set, enter the user ID and select [Next]. Then, enter the passcode and select [Enter].
 - While a user is authenticated, the <Log In/Out> button is lit on the control panel.
 - To exit Authentication mode, press the <Log In/Out> button on the control panel.
- **3** Select [Charge Print].

Note

- **4** Select the user to check, and select [Job List].
 - Note Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
 - You can enter a user ID in [Go to] using the numeric keypad to display the user ID at the top of the list.



🚍 Charge Print		Refresh	🕜 Close
		Go t 001	o ⇔ 200
001 (No User ID)	002 User Name2		
003 User Name3	004 User Name4	lobs	300
005 User Name5	006 User Name6		
007 User Name7	008 User Name8		
009 User Name9	010 User Name10		
011 User Name11	012 User Name12		Job List

- **5** Enter the passcode, and select [Confirm].
 - If a passcode is not set, the passcode entry screen does not appear.
- User Name1 Confirm Passcode
- **6** Select the job to be printed or deleted.

) U	ser Name2		🔇 Refi	resh	🕜 Close
	Job Name	Stored Date	Pages		Number of Job 28
1.	Doc Name1012345678901234	2011/1/26 11:35 A	9999	*	
2.	Doc Name2012345678901234	2011/1/26 11:35 A	9999		Delete
3.	Doc Name3012345678901234	2011/1/26 11:35 A	9999		Print Quantity
4.	Doc Name4012345678901234	2011/1/26 11:35 A	9999		1 ↔ 9,999 Sets
5.	Doc Name5012345678901234	2011/1/26 11:35 A	9999		10
6.	Doc Name6012345678901234	2011/1/26 11:35 A	9999	•	Print

- 7 Select any option.
- **8** When printing, specify the number of print sets using the numeric keypad.

■Delete

Deletes the Charge Print job. Refer to "When [Delete] is Selected" (P.379).

Print Quantity

Specify the number of print sets using the numeric keypad.

■Print

Prints the Charge Print job. The job is deleted after it is printed. Refer to "When [Print] is Selected" (P.380).

When [Delete] is Selected

1 Select [Delete].



■Delete

Deletes the job.

Important • Once a job is deleted, it cannot be restored.

■Cancel


Cancels deleting the job.

When [Print] is Selected

Specify how to process the job after it is printed.

Note

 The screen shown on the right does not appear if [Print Job Confirmation Screen] is set to [Disabled] in System Administration mode. If [Disabled] is selected, the machine automatically deletes the job after printing without displaying the confirmation screen. For more information, refer to "5 Tools" > "Stored File Settings" > "Print Job Confirmation Screen" in the Administrator Guide.

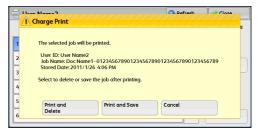

Print and Delete

Starts printing the job. The job is deleted after it is printed.

Print and Save

Starts printing the job. The job is not deleted after it is printed.

■Cancel

Cancels printing the job.

Private Charge Print

This feature allows you to temporarily store print data in the machine for each authentication user ID, and request on the machine's control panel to print the data. As the feature enables you to select and print only necessary jobs, you can avoid printing unnecessary jobs. Furthermore, the machine displays only the jobs of authenticated users and their associated sub users to securely protect the privacy of the users. The Private Print feature is suitable for authenticating and managing specific users managed by the system administrator.

If received print jobs are set to be saved with Private Charge Print, the jobs are saved for each authentication user ID.

Note

- An application (sold separately) is required to use the feature that associates sub users with the user ID of a login user. For more information, contact our Customer Support Center.
 - [Private Charge Print] is displayed when [Receive Control] in [Charge/Private Print Settings] is set to either of the following:
 - Selecting [According to Print Auditron] in [Receive Control], and then selecting [Save as Private Charge Print Job] in [Job Login Success].
 - Selecting [Save as Private Charge Print Job] in [Receive Control].
 - When the Private Charge Print feature is selected, you cannot specify normal print, Secure Print, Sample Set, or Delayed Print on the print driver.

The Private Charge Print feature restricts the use of the machine through either user ID authentication or card authentication (only the IC Card Reader (optional) is available), or the combination of both. For information on the types of authentication, refer to "14 Authentication and Accounting Features" > "Authentication" > "Types of Authentication" in the Administrator Guide.

To delete a print job instructed with an invalid user ID, display the list of print jobs after logging in as a system administrator, and then select the job to be deleted. For more information, refer to "3 Maintenance" > "Deleting a Private Charge Print Job with an Invalid User ID" in the Administrator Guide. For information on how to set a User ID, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide.

The following describes how to print or delete a job stored with the Private Charge Print feature.

- **1** Press the <Log In/Out> button on the control panel, or select the login information field on the touch screen.
- **2** Enter the user ID, and select [Enter].
 - When a passcode is set, enter the user ID and select [Next]. Then, enter the passcode and select [Enter].
 - While the user is authenticated, the <Log In/Out> button is lit on the control panel.
 - To exit Authentication mode, press the <Log In/Out> button on the control panel.



- Note
 If you are authenticated as a system administrator, selecting [Private Charge Print] will display a list of authentication user IDs. Select a user ID from the list, and then select [Job List] to display a list of jobs stored for the selected user.
- **4** Select the job to be printed or deleted.

Select [Private Charge Print].

Note • You can select up to 100 files simultaneously to print or delete the files. If you select multiple files, they are printed in the selected order.

💧 Pi	rivate Charge Print		Refre	sh 🛛 🥜 Close
	Job Name	Stored Date	Pages	Number of Jobs 28
1.	Doc Name1012345678901234	2011/1/26 11:35 A	9999	Select All
2.	Doc Name2012345678901234	2011/1/26 11:35 A	9999	Delete
3.	Doc Name3012345678901234	2011/1/26 11:35 A	9999	
4.	Doc Name4012345678901234	2011/1/26 11:35 A	9999	Print Quantity 1 ↔ 9,999 Sets
5.	Doc Name5012345678901234	2011/1/26 11:35 A	9999	10
6.	Doc Name6012345678901234	2011/1/26 11:35 A	9999	▼ Print

- **5** Select any option.
- **6** When printing, specify the number of print sets using the numeric keypad.

■Select All

Selects all jobs. To deselect all the jobs, select this button again.

■Delete

3

Deletes the Private Charge Print job.

• If jobs with the same user ID are all deleted, the user ID will be deleted. Refer to "When [Delete] is Selected" (P.381).

Print Quantity

Specify the number of print sets using the numeric keypad.

■Print

Prints the Private Charge Print job. The job is deleted after it is printed. Refer to "When [Print] is Selected" (P.382).

When [Delete] is Selected

1 Select [Delete].



■Delete

Deletes the job.


Important • Once a job is deleted, it cannot be restored.

■Cancel

Cancels deleting the job.

When [Print] is Selected

- **1** Specify how to process the job after it is printed.
 - Note The screen shown on the right does not appear if [Print Job Confirmation Screen] is set to [Disabled] in System Administration mode. If [Disabled] is selected, the machine automatically deletes the job after printing without displaying the confirmation screen. For more information, refer to "5 Tools" > "Stored File Settings" > "Print Job Confirmation Screen" in the Administrator Guide.

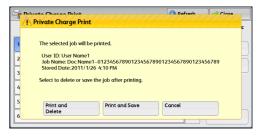

■Print and Delete

Starts printing the job. The job is deleted after it is printed.

Print and Save

Starts printing the job. The job is not deleted after it is printed.

■Cancel

Cancels printing the job.

Public Folder

This feature allows you to store data in the machine and send the data by operating on a remote machine.

The following describes how to print or delete a job stored in a public folder.

For information on how to operate public folders, refer to "Store for Polling (Storing Files on the Machine that a Remote Machine can Retrieve)" (P.227).

- This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Public Folder].

Active Jobs	Completed Jobs	Secure Print Jobs & More	Close
Private Cha	arge Print	Sample Set	Delayed Print
Charge Prin	nt	Public Folder	Undelivered Faxes

- **2** Select the job to be printed or deleted.
 - Note Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.

Number - Type 00001 - Store for Polling	Stored Date	Pages		Number of Files:
00001 - Store for Polling				28
	2011/1/26 11:35 A	9999	*	Select All
00002 - Store for Polling	2011/1/26 11:35 A	9999		Delete
00003 - Store for Polling	2011/1/26 11:35 A	9999		
00004 - Store for Polling	2011/1/26 11:35 A	9999		
00005 - Store for Polling	2011/1/26 11:35 A	9999		
00006 - Store for Polling	2011/1/26 11:35 A	9999	•	Print
	00003 - Store for Polling 00004 - Store for Polling 00005 - Store for Polling	00003 - Store for Polling 2011/1/26113SA 00004 - Store for Polling 2011/1/26113SA 00005 - Store for Polling 2011/1/26113SA	00003 - Store for Polling 2011/1/26 11:35 A 9999 00004 - Store for Polling 2011/1/26 11:35 A 9999 00005 - Store for Polling 2011/1/26 11:35 A 9999	00003 - Store for Polling 2011/1/26 11:35 A 9999 00004 - Store for Polling 2011/1/26 11:35 A 9999 00005 - Store for Polling 2011/1/26 11:35 A 9999

3 Select any option.

■Select All

Selects all jobs. To deselect all the jobs, select this button again.

■Delete

Deletes the selected job stored in the public folder. Refer to "When [Delete] is Selected" (P.383).

■Print

Prints the selected job stored in the public folder. Refer to "When [Print] is Selected" (P.383).

When [Delete] is Selected

1 Select [Delete].



■Delete

Deletes the job. Important • Once a job is deleted, it cannot be restored.

■Cancel

Cancels deleting the job.

When [Print] is Selected

Starts printing the job.

Undelivered Faxes

The following describes how to re-send or delete an undelivered fax job.

- Note This feature may not appear depending on the settings made in System Administration mode.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
- **1** Select [Undelivered Faxes].

Job Status

- **2** Select the job to be re-sent or deleted.
 - Note Select [Refresh] to display the updated information.
 - Select [▲] to return to the previous screen or [▼] to move to the next screen.
- **3** Select any option. To re-send to the previously specified fax number, press the <Start> button.

Undelivere	d Faxes			Refresh	🥜 Close
lob Type	1	Recipient			
Send Fax		1234567890	1234567890123456	789012345678	9012345678
Send Fax		1234567890	1234567890123456	789012345678	9012345678
Broadcast Fax		1234567890	1234567890123456	789012345678	9012345678
Broadcast Fax		1234567890	1234567890123456	789012345678	9012345678
Send Fox / Intern	et Fax	1234567890	1234567890123456	789012345678	9012345678
Send Fox / Intern Send Fox / Intern			1234567890123456 1234567890123456		
	et Fax			789012345678	
Send Fox / Intern	et Fax	1234567890	1234567890123456	789012345678	9012345678
Send Fox / Intern	et Fax	1234567890	1234567890123456	789012345678	9012345678
5end Fox / Intern	et Fax et Fax il Faxes : 12******\7	1234567890	1234567890123456	789012345678	9012345678
5end Fox / Intern Undelivered Outside Line Job Type	et Fax d Faxes : 12*****\7 : Send Fax	1234567890	1234567890123456 : File 00012 Time Submitte	789012345678 : : ed : 2011/1/26	9012345678
Send Fox / Intern Undelivered Coutside Line Job Type # of Recipients	et Fax d Faxes : 12*****\7 : Send Fax : 1000	1234567890	1234567890123456 : File 00012 Time Submitte	789012345678	9012345678
5end Fox / Intern Undelivered Outside Line Job Type	et Fox 1 Foxes : 12\5555 : Send Fox : 1000 : 4	1234567890	1234567890123456 : File 00012 Time Submitte	789012345678 ed :2011/1/20 ted :2011/1/20	9012345678

■Delete This Fax

Deletes the undelivered fax job. Refer to "When [Delete This Fax] is Selected" (P.384).

■Change Recipients

Allows you to change the fax recipient and re-send the undelivered fax job. Refer to "When [Change Recipients] is Selected" (P.384).

When [Delete This Fax] is Selected

1 Select [Delete].

1	Are you sure you want to delete the selected fax?	
1		
Ŧ	Job 00012 Recipient: 12*****\78!90	
	Fax Undelivered to 1000 Recipient(s)	
	Job Type: Send Fax Time Submitted: 2011/1/26:11:48 AM	
F	Time Completed: 2011/1/26:12:00 PM	
5	Pages: 4	
	Delete	

■Delete

Deletes the undelivered fax job.

■Cancel

Cancels deleting the undelivered fax job.

When [Change Recipients] is Selected

Specify a fax recipient for the undelivered fax job.

Besides the fax recipient, the following features can be changed on the control panel:

- · Fax type
- · Starting Rate

Important • If the fax recipient has been changed, header information will not be added even if [Transmission Header Text] is set to [Display Header].

For information on how to specify fax recipients, refer to "Step 3 Specifying Destinations" (P.158).

Printing Pending Jobs


After the last user operation on the control panel of the machine, a job is waiting to be printed until the period of time specified in [Auto Print] elapses, instead of being printed immediately. You can forcibly print this pending job without waiting for this time period to elapse.

If a job is paused by the <Stop> button and is waiting to be resumed, you can also resume the job. If there are multiple jobs, subsequent jobs are printed after the paused job has been printed.

Note • If there are no pending jobs, the [Print Waiting Jobs] button is disabled.

For information on how to set [Auto Print], refer to "5 Tools" > "Common Service Settings" > "Machine Clock/Timers" > "Auto Print" in the Administrator Guide.

1 Press the <Job Status> button.



2 Select [Print Waiting Jobs].

Active	Jobs Compl Job		Print Waiting Jol	Close
	l Jobs bb Type	Remote Terminal	Status	Progress
02222	- Сору	11x22mm:3%	Copying	55/66
02223	Print	11x22mm:3%	Print Wait	66

Job Status

Handling Error Terminations

This section describes how to handle error terminations.

For a Print Job

Select a job shown as an error termination on the [Completed Jobs] tab to check the error code. Follow the instructions of the error code to solve the problem.

If an error occurs during a print job, the machine can be configured either to pause the print job until the error is confirmed by the user, or to automatically cancel the error job so that subsequent jobs can be printed.

For more information on the setting, refer to "5 Tools" > "Print Service Settings" in the Administrator Guide. For information on error codes, refer to "15 Problem Solving" > "Error Code" in the Administrator Guide.

For a Fax Job

A Transmission Report - Job Undelivered is printed.

For more information on the Transmission Report - Job Undelivered, refer to "4 Machine Status" > "Machine Information" > "Automatically Printed Reports/Lists" > "Transmission Report - Job Undelivered" in the Administrator Guide. For more information on how to print the Transmission Report - Job Undelivered automatically, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Transmission Report - Job Undelivered" in the Administrator Guide.

■For a Scan Job

A Transmission Report - Job Undelivered is printed.

For more information on the Transmission Report - Job Undelivered, refer to "4 Machine Status" > "Machine Information" > "Automatically Printed Reports/Lists" > "Transmission Report - Job Undelivered" in the Administrator Guide. For more information on how to print the Transmission Report - Job Undelivered automatically, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Transmission Report - Job Undelivered" in the Administrator Guide.

For Other Jobs

Print a Job History Report, and check the execution results.

For information on the Job History Report, refer to "5 Tools" > "Common Service Settings" > "Reports" > "Job History Report" in the Administrator Guide. When an error code is listed in the Transmission Report - Job Undelivered or the Job History Report, refer to "15 Problem Solving" > "Error Code" in the Administrator Guide.

12 Computer Operations

This chapter describes how to print documents, import scanned files, use Direct Fax, and operate CentreWare Internet Services on your computer.

No	 Some models do not support the features described in this chapt component is required. For more information, contact our Custon 	
	The computer screen images shown in this chapter are as of Ap	ril 2011.
	 The procedures in this chapter may vary depending on the version utility software being used. 	on of the driver or
•	Features Overview	
•	Print	
•	E-mail Printing	
•	Sending Fax	
•	Importing Scanned Data	
•	CentreWare Internet Services	404

Features Overview

This section describes an overview of features you can perform from a computer.

■Printing

Submits a print job to the machine from a computer. For more information, refer to "Print" (P.389).

■E-mail Printing

Submits a print job to the machine from a computer by sending an e-mail attached with a document. The received e-mail is automatically printed from the machine according to the settings on the machine.

For more information, refer to "E-mail Printing" (P.392).

■Sending Fax

Sends a fax directly from a computer. For more information, refer to "Sending Fax" (P.394).

Importing Scanned Data

Imports files stored in a folder on the machine to a computer. For more information, refer to "Importing Scanned Data" (P.396).

■CentreWare Internet Services

Displays the machine status and job status. The feature also allows you to change settings as well as to import files stored in a folder.

For more information, refer to "CentreWare Internet Services" (P.404).

For information on how to import scanned data stored in a folder, refer to "Importing Using CentreWare Internet Services" (P.401).

Print

Print

This section describes how to print with the machine by operating on a computer.

Print Features

The main print features of the machine are as follows:

Printing Using a Print Driver

For more information on print features, click [Help] on the print driver screen to view the print driver's help. For information on printing, refer to "Printing" (P.391).

Note • Some features become available after you make option settings on the [Configuration] tab. The unavailable features are grayed out.

■Pages Per Sheet (N-Up)

Prints multiple pages onto one side of a single sheet of paper.

■2-Sided Print

Prints data on both sides of paper.

■Poster

Splits one page of print data into multiple sheets of paper and enlarges the printed image to fit the size of each sheet. Used to create large posters.

Booklet Creation

Performs 2-sided printing and page allocation for printing a booklet in the correct page order.

Note • This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

Transparency Separators

Automatically inserts a blank sheet of paper as a separator each time a transparency is printed.

■Watermark

Prints preset text, such as "Confidential", over the print data.

■Secure Print

Temporarily stores the print data on the machine to print it with the print command from the machine. This feature allows you to set a passcode, which is helpful when printing confidential documents.

For information on how to print a Secure Print job, refer to "Secure Print" (P.372).

■Sample Set

Before printing multiple sets of a document, you can first print one set for trial, and then print the remaining sets from the machine.

For information on how to print a Sample Set job, refer to "Sample Set" (P.374).

Delayed Print

Temporarily stores the print data on the machine to print it at a specified time. For information on how to print a Delayed Print job, refer to "Delayed Print" (P.376).

Store in Remote Folder

Temporarily stores the print data in a registered folder to print the data with the print command from the machine.

- **Important** The print results of the Store in Remote Folder feature may be inferior in quality in comparison to other print results.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.

For information on how to print files in a folder, refer to "Printing Files in a Folder" (P.328).

Direct Printing

Allows you to directly send TIFF, PDF, JPEG, XPS, XDW (DocuWorks), or XBD (DocuWorks binder) format files from a computer to the machine without using a print driver.

For information on Direct Printing, refer to "Print" > "Job Submission" in the help of CentreWare Internet Services.

E-mail Printing

Allows you to send e-mail with the TIFF, PDF, JPEG (JFIF), XPS, XDW (DocuWorks), or XBD (DocuWorks binder) format documents attached from a computer to the machine. The received e-mail is automatically printed from the machine.

Note • If the Authentication feature is enabled, received e-mails are not printed automatically.

For information on how to use E-mail Printing, refer to "E-mail Printing" (P.392).

Print Features Using Authentication Information

■Charge Print

This feature authenticates users on the machine to prevent unauthorized users from operating print jobs. When this feature is enabled, the machine prints only the jobs of authenticated users. The machine can also be configured to store multiple print jobs temporarily until the user requests to print them on the control panel.

In addition, by registering an authentication user ID and passcode on the machine in advance, only the registered user can print the jobs.

Note • To prohibit other users from operating jobs, register a passcode for your Billing ID on the print driver.

For information on how to set Charge Print, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide. For information on how to print a Charge Print job, refer to "Charge Print" (P.378).

■Private Charge Print

Note

This feature allows you to temporarily store print data in the machine for each authentication user ID, and request on the machine's control panel to print the data. As the feature enables you to select and print only necessary jobs, you can avoid printing unnecessary jobs. Furthermore, the machine displays only the jobs of authenticated users and their associated sub users to securely protect the privacy of the users. This feature is suitable for authenticating and managing specific users managed by the system administrator.

- If you do not want to store unnecessary jobs, you can configure the machine to store only the jobs for which authentication succeeded.
 - An application (sold separately) is required to use the feature that associates sub users with the User ID of a login user. For more information, contact our Customer Support Center

For information on how to set Private Charge Print, refer to "5 Tools" > "Authentication/Security Settings" > "Authentication" > "Charge/Private Print Settings" in the Administrator Guide. For information on how to print a Private Charge Print job, refer to "Private Charge Print" (P.380).

Setup

To print from your computer, your computer must have a print driver installed.

For information on how to install the print driver, refer to the manual included in the Driver CD Kit.

When printing using authentication information, you must configure the printer settings on your computer. Make the necessary settings on the [Configuration] tab of the printer's properties. For more information, refer to the print driver's help.


Printing

The following describes how to print documents.


The procedure for printing depends on the application software you use. For more information, refer to the documentation provided with the application.

For more information on print features, click [Help] on the print driver screen to view the print driver's help.

- **1** Select [Print] from the [File] menu on the application.
- 2 Confirm [Printer Name] and click [Properties] if necessary.
- **3** Set the properties if necessary.
 - You can change the print feature in [Job Type].

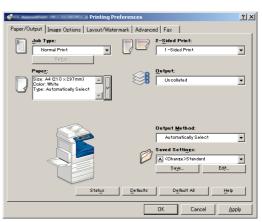

- 4 Click [OK].
- 5 Click [OK] in the [Print] dialog box.
 - Note
- If the document monitor is installed and set to monitor the machine, the notification screen is displayed when printing has been completed. The document monitor is available in the CD-ROM of the Driver CD Kit. For information how to install the document monitor, refer to the manual included in the Driver CD Kit.
 - The environment-friendliness level is indicated on the notification screen with leaves. This information is provided only when [Normal Print] or [Sample Print] is selected in [Job Type].

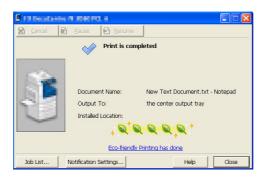

E-mail Printing

You can send e-mail with documents attached from a computer to the machine. The received e-mail is automatically printed from the machine according to the settings on the machine. This feature is called "E-mail Printing".

Note

- If the Authentication feature is enabled, received e-mails are not printed automatically.
 - This feature does not appear for some models. An optional component is required. For more information, contact our Customer Support Center.
 - The following file formats can be used: TIFF, PDF, JPEG (JFIF), XPS, XDW (DocuWorks), or XBD (DocuWorks binder).

Setup

To use the E-mail Printing feature, the following settings are required. Check with your system administrator or network administrator whether these settings have been completed.

E-mail Account Registration

Registering an e-mail account in advance.

Configuration on the Machine

Configuring the required settings on the machine.

For information on E-mail Environment Settings, refer to "8 E-mail Environment Settings" in the Administrator Guide.

Receiving E-Mail

The following describes how to receive e-mails from Outlook Express on a computer as an example.

- **1** Use your e-mail software to create the body (text) for an e-mail, and then attach a document to the e-mail if necessary.
 - **Important** Only plain text is available for the e-mail body. Change the body text format to plain text on your e-mail application.
 - Any forwarded e-mail (that is attached to another e-mail) cannot be printed.

Note

- If the extension of the attached file is other than ".tif", ".tiff", ".pdf", ".jpeg", ".jpg", ".jpe", ".jfif", ".xps", ".xdw", and ".xbd", the file may not be printed correctly.
 - Up to 31 documents can be attached.
- **2** Enter the machine's e-mail address as the recipient.

Refe	_	_												
		New	Inser	-			age <u>H</u> elp							
Ξ.		Х.	D.	1	5		×100	U			⊡a			
Send					Undo	Check		Attach	Priority		Sign	Encrypt	Offline	
😭 To:	pri	int@de	vice1.ex	ample.co	jp					_	_			
Cc:											_			
Subject	Re	fereno	•							_	_			
vrial			-	10 7	THE	37	U A.	= =	e e			i = 1	- 0.	1
			_											_

3 Send the e-mail.

Note	• The machine prints the e-mail body and the attached documents according to the following
	settings. The offset output setting is disabled in all cases.

- E-mail body:
- Default values of the PCL print driver for this machine which is installed on the computer • TIFF or JPEG formatted attached files:
- Default values of the logical printer set in [Memory Settings] of [TIFF/JPEG] in [Language Emulations] of CentreWare Internet Services
- PDF formatted attached files: Settings of PDF Direct Print when [Print Processing Mode] is set to [PDF Bridge] in PDF Direct Print.

Default values of the logical printer configured under [Language Emulations] > [PostScript] > [Logical Printer Number] in CentreWare Internet Services when [Print Processing Mode] is set to [PS] in PDF Direct Print.

Sending Fax

This section describes how to send a fax using the Direct Fax feature. The following procedure uses Windows XP WordPad as an example.

The Direct Fax procedure depends on the application you use. For more information, refer to the documentation provided with the application.

For more information on the Direct Fax feature, click [Help] on the print driver screen to view the print driver's help.

Important • The Direct Fax feature is not available when the Server Fax service is enabled.

- This feature does not appear for some models. To use the feature, an optional component is required. For more information, contact our Customer Support Center.
- 1 Select [Print] from the [File] menu on the application.
- **2** Select a fax printer from [Printer Name].
- **3** Click [Properties], and select [Fax] in [Job Type].
- 4 Click [OK].
- **5** Click [OK] in the [Print] dialog box.
- **6** Specify a destination in the [Fax Recipient] dialog box.
- **7** Click [OK].

The [Fax Job Confirmation] dialog box appears after you have sent a fax job. A list of recipients to whom the fax job is being sent will be displayed.

🤣 Die Agenetikeren in Kalifie Mass (Printi	ng Preferences	? ×
Paper/Output Image Options Layout/Water	mark Advanced Fax	
Lob Type: Fax Setup	2-Sided Print:	v
Paper: Size: A4 (210 × 297mm)	Uncollated	Y
		▼ Edt.
Status	Defaults Default All	Help
	ОК	Cancel

Registering Destinations

The following describes how to register fax destinations from the machine to another machine (ApeosPort-IV 5070/4070/3070, DocuCentre-IV 5070/4070) in a single operation through a computer.

You can use the same procedure to register fax destinations from another machine (ApeosPort-IV 5070/4070/3070, DocuCentre-IV 5070/4070) to this machine.

Use CentreWare Internet Services to register fax destinations.

For information on CentreWare Internet Services, refer to "6 CentreWare Internet Services Settings" > "Configuring Machine Settings Using CentreWare Internet Services" in the Administrator Guide.

You can register fax destinations separately on the control panel. For more information, refer to "5 Tools" > "Setup" > "Add Address Book Entry" in the Administrator Guide.

- Important As CentreWare Internet Services can be accessed by multiple users simultaneously, there is a risk that the registered data may be overwritten if a system administrator ID and passcode are not set. We recommend that data modification only be permitted for a system administrator with a passcode.
 - Be sure not to perform this operation simultaneously with the address number registration from the control panel.
 - If a number is duplicated, the existing number will be overwritten by the new one.
 - A file in CSV format exported by CentreWare Internet Services (address book data) is not designed to be edited or changed by editing software. The data may be damaged when it is edited or changed. Due to data alteration, the fax may be sent to undesired recipients. Therefore, do not edit or change files that are in CSV format (address book data) with software such as Microsoft[®] Excel.

- By using CentreWare Internet Services, you can import CSV format files which were created on a machine other than this machine to the Address Book of this machine. For more information, refer to the help of CentreWare Internet Services.
 This feature is not available depending on the version of the CSV format file or the model of the machine.
 - By using CentreWare Internet Services, you can download a blank form of the Address Book (a CSV format file) to a computer. After completing the form on a computer, batch registration of the form (a CSV format file) on the machine is available via CentreWare Internet Services. For more information, refer to the help of CentreWare Internet Services.
- **1** Start up the computer, and a web browser.
- 2 Enter the machine's IP address or Internet address in the browser address field, and press the <Enter> key.
 - Note
 If your network uses DNS (Domain Name System) and the machine's host name is registered in the domain name server, you can access the machine using the URL with the combination of the host name and the domain name. For example, if the host name is "myhost", and the domain name is "example.com", then the URL is "myhost.example.com".
 - Ask your system administrator for the IP address or Internet address.
 - When specifying a port number, add ":" and the port number after the address. The default port number is "80".
 - When the Authentication feature is enabled on the machine, enter a user ID and passcode in the [User Name] and [Password] fields respectively. Ask your system administrator for the user ID and passcode.
 - If communications are encrypted, you must specify an address that starts with "https" instead of "http" to access CentreWare Internet Services.
- **3** Click the [Properties] tab, and select [Services] > [E-mail] > [Public Address Book] in the left frame on the screen.
- **4** Click [Map Existing Address Book] in [Export Public Address Book].
- **5** Click [Save] in the Security Warning dialog box.
- Internet Services

 Internet
 Descrite
 Service

 Status
 Jula
 Paint
 Service
 Service

 Conservice
 Insuit
 Address Book
 Insuit
 Service

 Strates
 Insuit
 Address Book
 Insuit
 Service

 Strates
 Insuit
 Conservice
 Insuit
 Service

 Strates
 Insuit
 Service
 Insuit
 Service

 Strates
 Service
 Insuit
 Service
 Service

 Strates
 Strates
 Service
 Service
 Service

 Strates
 Service
 Service
 Service
 Service
- **6** Specify the destination to save the file in.
- 7 Enter the IP address or Internet address of the other machine (ApeosPort-IV 5070/ 4070/3070, DocuCentre-IV 5070/4070) in the browser address field, and press the <Enter> key.
- **8** Click the [Properties] tab, and select [Public Address Book] in the left frame on the screen.
 - Note
 The batch registration feature of the [Properties] tab is not available for Address Book data created based on a CSV file which was downloaded from the [Address Book] tab. For the Address Book data, perform batch registration on the [Address Book] tab.
- **9** Click [Browse] in [Import Public Address Book] to specify the file saved in step 6.
- **10** Click [Import Now].

Importing Scanned Data

This section describes how to import files from a machine's folder to your computer. The following four methods are available. The following shows the reference section for each procedure.

Importing to a TWAIN Compatible Application	396
Importing Using Stored File Manager 3	398
Importing Using CentreWare Internet Services	401
Importing Using EasyOperator	403

Importing to a TWAIN Compatible Application

The following describes how to import files from a machine's folder to application software.

Network Scanner Driver is used to import stored files.

Network Scanner Driver is software that allows a client-side application to import stored files (scan data) from a machine's folder via a network.

To use Network Scanner Driver, you must have Network Scanner Utility 3 installed on your computer.

Note Install Network Scanner Utility 3 from the Driver CD Kit.

To import files stored in a folder, prior settings are required, such as enabling ports. For more information, refer to "9 Scanner Environment Settings" > "Configuration of Store to Folder" in the Administrator Guide. For information on the operation of the application, refer to the documentation provided with the application.

For information on how to install Network Scanner Driver, refer to the manual included in the Driver CD Kit.

To learn about fields in the displayed dialog box, click [Help] to view the Network Scanner Driver's help.

1 Launch the application software to which files are to be imported.

Important • The application must support TWAIN. TWAIN is a standard for scanners and other input devices.

- For notes and restrictions on the use of application software, refer to the "Readme" included in Network Scanner Utility 3.
- **2** From the [File] menu, select the command for selecting the scanner (source).
- **3** Select [FX Network Scanner 3 TWAIN], and click [Select].

Sources:	
FX Network Scanner 3 TWAIN	
	Select
	Cancel

4 From the [File] menu, select the command for importing the image from the scanner.

- **5** From the displayed list, click the scanner name of the machine, and click [Next].
 - Note
- If no scanners are shown in the list, click [Search Again]. The application searches for scanners.
 - To change the display of scanner names, use the dialog box that appears by clicking [Search/Display Settings]. For more information, refer to "Changing the display of scanner names" (P.398).
 - Only scanners on the network are automatically listed. To view a scanner on another network, click [Search/Display Settings], and register the IP Address and scanner name. For information on how to register a scanner, refer to "Changing the display of scanner names" (P.398).
- 6 In the [Folder Number] field, enter the number of the folder (001 200) that contains the file to be imported. In the [Passcode] field, enter the passcode (up to 20 digits).
 - Note You can also select a folder number from [Registered Folders].
 - Clicking [Select Scanner] returns to step 5, where you can reselect a scanner.
- 7 Click [Confirm].
- **8** Select a file to be imported from the list, and click [Import].
 - Note
- You can select multiple files.
- [Import], [Refresh], and [Delete] are available from the menu that appears when you right-click on the list.



When importing begins, the scan data is forwarded from the folder to the computer.

After being forwarded, the data is loaded onto the application software and is deleted from the folder.

- Note
- An icon is displayed next to a file that is scanned in pages and whose forwarding operation has not been completed.
 - For most applications except DocuWorks, Network Scanner Driver expands the compressed data and transfers the data to the applications in BMP format. For DocuWorks, Network Scanner Driver transfers the data without data expansion processing. For this reason, it does not take much time for data transfer.
 - The machine can be configured not to delete files from a folder after forwarding them. For information on the setting, refer to "5 Tools" > "Setup" > "Create Folder" in the Administrator Guide.



Specify Folder		
pecify Folder		
Enter the fol	der number and passcode.	
Scanner Name:	Tapasar Tarray Contract	
IP Address:	100000000000	
<u>F</u> older Number:	83 Set to Often-Used Folders	
Passcode:	****	
<u>R</u> egistered Fold	ars:	
Folder No.	Folder Name	
Folder No. 71		
Folder No. 71 80		
Folder No. 71 80 81	Folder Name	
Folder No. 71 80		

Changing Network Scanner Driver Settings

To learn about the fields in the displayed dialog box, click [Help] to view the Network Scanner Driver's help.

Changing the display of scanner names

You can change the display of scanner names listed.

To change the display of scanner names, use the dialog box that appears by clicking [Search/Display Settings] in the scanner selection dialog box.

Under [Scanner Name Display], you can change the method in which scanner names are displayed in [Scanner for Searching].

Specify scanners to search for under [Search Target Settings].

Note • If you click [Add] and then register a scanner, you can display scanners from other networks.

Import method for scanned files

You can change the display and the import settings for files scanned from a folder.

To change the import method, click [Import Settings] from [File] menu in the file selection dialog box, and configure the settings in the dialog box that appears.

D _v	₂lay by: iduct Name ▼
	ts Eile: WINDOWS¥system32¥drivers¥etc¥hosts <u>B</u> rowse
eard	ch Target Settings
Sca	nners for Searching:
Ne	twork Scanners
•	Display <u>Registered</u> Scanners
F	Scanner Name 🔺 IP Address / FQDN
	Add Edit Delete
Cor	nmunity Name (Read Only):

Import Settings		×		
Animation Display When Importing				
Invert Negative/Positive	Image for Impo	rted File		
Temporary Save in:				
C¥Documents and Settings¥	Administrator	Application Data¥A		
		Browse		
OK	Cancel	Help		

Importing Using Stored File Manager 3

The following describes how to use Stored File Manager 3 to import files from a machine's folder.

Stored File Manager 3 is software to import files from a machine's folder to a computer without using any client-side application.

To use Stored File Manager 3, your computer must have Network Scanner Utility 3 installed.

Note Install Network Scanner Utility 3 from the Driver CD Kit.


To import files stored in a folder, prior settings are required, such as enabling ports. For more information, refer to "9 Scanner Environment Settings" > "Configuration of Store to Folder" in the Administrator Guide. For information on the operation of the application, refer to the documentation provided with the application.

For information on how to install Stored File Manager 3, refer to the manual included in the Driver CD Kit. To learn about fields in the displayed dialog box, click [Help] to view the Stored File Manager 3 help.

1 Click [Start] and select [Programs] > [Fuji Xerox] > [Network Scanner Utility 3] > [Stored File Manager 3].

Note • If you used another directory for installation, specify the directory instead.

2 From the displayed list, click the scanner name of the machine, and click [Next].



- **Note** If no scanners are shown in the list, click [Search Again]. The application searches for scanners.
 - To change the display of scanner names, use the dialog box that appears by clicking [Search/Display Settings]. For more information, refer to "Changing the display of scanner names" (P.400).
 - Only when the machine is connected to the network, the scanner name is automatically listed. To view the machine connected to another network, click [Search/Display Settings] and register the IP address and scanner name. For information on how to change the settings, refer to "Changing the display of scanner names" (P.400).
- **3** In the [Folder Number] field, enter the number of the folder (001 200) that contains the file to be imported. In the [Passcode] field, enter a passcode (up to 20 digits).
 - Note
- You can also select a folder number from [Registered Folders].
 - Clicking [Select Scanner] returns to step 2, where you can reselect a scanner.

Specify Folder		×
Specify Folder		
Enter the fold	der number and passcode.	
Scanner Name:	personal control	
IP Address:	(holeschool)	
Eolder Number:	83 Set to Often-Used Folders	
Passcode:	****	
<u>B</u> egistered Folde	rs:	
Folder No.	Folder Name	
71 80 81	C	
83 84	Temp	
99	10 ×	
< <u>S</u> elect Sca	nner Confirm <u>C</u> lose <u>H</u> elp	

- **4** Click [Confirm].
- **5** Select a file to be imported from the list, and click [Import].

🗞 083: Tem	p - Stored File	Manager 3					
<u>F</u> ile <u>E</u> dit	<u>V</u> iew <u>H</u> elp						
E Import	Refresh	X Delete		Selec	ot Scanner Screen	🛅 Select Fo	lder Scre
File No.	File Name	Stored Date 🔻	Format	Pages	Image Size	File Type	
4121	img-630111250	2011/1/06 11:12:54	JPEG	1	A4 (210 x 297mm)	Scan File	
創 4120	ime-630111238	2011/1/06 11:12:43	JPEG	1	A4 (210 x 297mm)	Scan File	
創 4119	img-630110707	2011/1/06 11:07:11	JPEG	1	A4 (210 x 297mm)	Scan File	
							<u> </u>
File can be in	nported by double-	clicking.	IP Addres	23	Model:	an 12 . 1920	1

- You can select multiple files.
 - When [File Saving Options] is set to [Set Destination for Each File] under the import settings, a dialog box for specifying a save destination is displayed. When the dialog box appears, specify a save destination, and click [OK].

For information on the import settings, refer to "Import settings for scanned files" (P.400).

- **6** The file is imported to the specified directory.
 - When [File Saving Options] is set to [Save in Fixed Destination] under the import settings, the file is saved in the specified directory.
 For information on the import settings, refer to "Import settings for scanned files" (P.400).

Changing Stored File Manager 3 Settings

To learn about the fields in the displayed dialog box, click [Help] to view the Stored File Manager 3 help.

Changing the display of scanner names

You can change the display of scanner names listed.

To change the display of scanner names, use the dialog box that appears by clicking [Search/Display Settings] in the scanner selection dialog box.

Under [Scanner Name Display], you can change the method in which scanner names are displayed in [Scanner for Searching].

Specify scanners to search for under [Search Target Settings].

Note • If you click [Add] and then register a scanner, you can display scanners from other networks.

■Import settings for scanned files

You can change the display and the import settings for files scanned from a folder.

To change the import method, click [Details] from [File] menu in the file selection dialog box, and configure the settings in the dialog box that appears.

Produ	ict Name 💌	
	Eile:	
C:¥WI	NDOWS¥system32¥drivers¥etc¥hosts Browse	
earch	Target Settings	
_	ers for Searching:	
Netwo	ork Scanners	
🗸 Dis	splay <u>R</u> egistered Scanners	
8	Scanner Name 🔺 🛛 🗍 IP Address / FQDN	Τ
1	COUNTRY D	
	<u>A</u> dd <u>E</u> dit <u>D</u> elete	
Comm	unity Name (Read Only):	

Details	×
Display / Import Settings Save As	
Interval(mins):	
Min(s)	L
Eile Saving Options:	L
Set Destination for Each File	L
Save in:	L
C#Documents and Settings#Administrator#Applicatic Browse	L
Notification	L
Animation	L
☐ Sound	L
Audig File:	L
Btowse	L
	L
	L
	L



Importing Using CentreWare Internet Services

This following describes how to import files stored in a machine's folder using CentreWare Internet Services.

When the machine is installed in a TCP/IP environment, CentreWare Internet Services allows you to import files stored in a machine's folder by accessing the machine from a computer via a web browser. You can also use a Macintosh computer to import files via a web browser.

Note • You can retrieve scanned data in DocuWorks or PDF format, but cannot encrypt the DocuWorks or PDF files and cannot attach a signature to the files when retrieving them.

For information on an overview of CentreWare Internet Services, refer to "CentreWare Internet Services" (P.404).

For more information on this operation, click [Help] in the top frame to view the help.

- **1** Start up the computer, and a web browser.
- 2 Enter the machine's IP address or Internet address in the browser address field, and press the <Enter> key.
 - If your network uses DNS (Domain Name System) and the machine's host name is registered in the domain name server, you can access the machine using the Internet address with the combination of the host name and the domain name. For example, if the host name is "myhost", and the domain name is "example.com", then the Internet address is "myhost.example.com".
 - Ask your system administrator for the IP address or Internet address.
 - When specifying a port number, add ":" and the port number after the IP address or the Internet address.
 - If the authentication feature is enabled on the machine, enter a user ID and passcode in the [User Name] and [Password] fields. Ask your system administrator for the user ID and passcode.
 - If communications are encrypted, you must specify an address that starts with "https" instead of "http" to access CentreWare Internet Services.
- **3** Select [Folder] on the [Scan] tab.
- 4 Click [File List] of the folder that contains the files to be imported.

Note

 If a passcode is set, enter the passcode in the [Passcode] field (up to 20 digits).

entreWare hternet Services			in the bit	670	🙀 System Administrator – Logout Help
<u>Status</u> Jobs	Print	Scan	Address Book	. Properties	Support
Scan	Folder				
Job Templates					
Folder Job Flow Sheeta	Go to 4001	- 200) 📃 🙆			(H= + 12 4> 43)
		Folder Number	Folder Name	Number of	Files in this Folder
	6	001	1	0	File List Delete Edit
	6	002	<available></available>		Create
	Đ	003	<available></available>		Create
	e	004	<available></available>		Create
	B	005	<available></available>		Create
	Ð	006	<available></available>		Create
	B	007	<available></available>		Create
	ъ	008	<available></available>		Create
	Ð	009	<available></available>		Create
	b	010	<available></available>		Create
	Ð	011	<available></available>		Create
	Ð	012	<available></available>		Create
				FUJI XeroX 🌍	
			description for	a interior de la compañía de la comp	NUT INSTALLE

- **5** Place a check mark next to each file to be imported, set the necessary items, and then click [Retrieve].
 - Note When you import files in PDF format from a folder, they cannot be optimized for web view.



6 Click a file name.



7 Click [Save].



Importing Using EasyOperator

When you use Fuji Xerox applications such as EasyOperator, you can import files stored in a machine's folder to your computer without using Network Scanner Driver.

The files in a folder can also be listed or displayed in thumbnail view.

To import files stored in a folder, prior settings are required, such as enabling ports. For more information, refer to "9 Scanner Environment Settings" > "Configuration of Store to Folder" in the Administrator Guide. For information on the operation of the application, refer to the documentation provided with the application.


The following describes how to import files stored in a machine's folder by using EasyOperator as an example.

1 Click the [Start] menu, and select [Programs] > [Fuji Xerox] > [CentreWare EasyOperator] > [EasyOperator].

Note • If you used another directory for installation, specify the directory instead.


2 In the left frame of the window displayed, add a machine's folder to [Mailbox].

Add the folder in which files to be imported are stored. For more information on how to add a folder, refer to the EasyOperator's help.

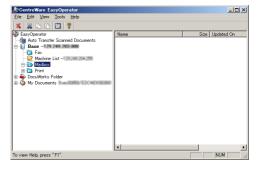


- **3** Select [Refresh] from the [View] menu.
- Click [+] to the left of [Folder] to display the added folder.
 When you select the added folder, the file

When you select the added folder, the file will be displayed in the right frame.

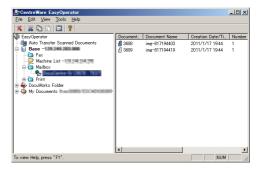

- **5** Select [Show Thumbnail] in the [View] menu to display the file in thumbnail view.
- **6** Check the thumbnail of the file to be retrieved, and select the file.

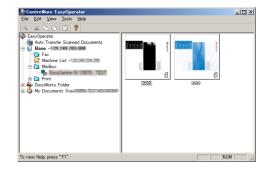

- 7 Select [Retrieve] from the [Tools] menu.
- 8 Select a save destination in the [Browse For Folder] dialog box, and click [OK].

CentreWare Internet Services

CentreWare Internet Services requires a TCP/IP environment, and enables you to view the status of the machine and its jobs, as well as change settings via a web browser. You can also import files stored in a folder.

For information on how to import files, refer to "Importing Using CentreWare Internet Services" (P.401). For information on the settings of CentreWare Internet Services, refer to "6 CentreWare Internet Services Settings" in the Administrator Guide.

CentreWare Internet Services Screen

The [CentreWare Internet Services] screen consists of five frames (divided windows). The information displayed in each frame depends on the feature selected: [Status], [Jobs], [Print], [Scan], [Address Book], [Properties], or [Support].

Important • For details on the setting items, click [Help] at the upper right corner of the CentreWare Internet Services screen to see help.

To display the online help for CentreWare Internet Services, users need to have the environment to connect to the internet. The communication fee shall be borne by you.



■Top Frame

Displayed at the top of the window. This frame includes the machine model name, a link to the help, user information, and tabs (links) leading to each feature.

■Upper Left Frame/Upper Right Frame

Information appearing in the upper left and upper right frames changes depending on the selected feature. Select a feature to view the available features and information in these frames.

Lower Left Frame

Displays the machine information and status, and the [Refresh] button. Clicking [Refresh] updates the information displayed.

Lower Right Frame

Clicking the logo opens the Fuji Xerox home page.

Tab Name	Main Features
Status	 Displaying the machine status Displays the status of the paper trays, output trays, and consumables such as toner cartridges. Usage Counters Displays the total number of pages used for each feature and cumulative numbers. Total Runtime Displays [Output Device Runtime], [Scanner Runtime], [Standby Time], [Low Power Time], [Sleep Time], [Warm-up Time], and [Power Off Time] in minutes.
Jobs	 Listing active jobs and allowing you to delete the jobs, and displaying completed jobs and error information
Print	 Job Submission Allows you to specify and print a file stored on your computer.
Scan	 Job Templates Allows you to create, edit, copy, and delete job templates. Folder Allows you to create and set folders. You can also import files in a folder and print the files. Job Flow Sheets Allows you to create, edit, and delete job flow sheets.
Address Book	 Allowing you to add, edit, and delete recipients in the Address Book Address Book Allows you to list all entries of the Address Book, delete the Address Book data, and restrict users to access to the Address Book. CSV file Allows you to import CSV files which are created by machines other than this machine, and download the sample CSV file and a blank CSV file.
Properties	 Displaying and setting the items such as Machine configuration, Interface, and Emulation settings.
Support	Displaying support information

The main features of CentreWare Internet Services are listed below.

Note

 Some field settings take effect after the machine is rebooted (after switching the power off and then on again, or after changing the System Settings from the control panel).

• If a setting is changed by CentreWare Internet Services during operation on the control panel, the updated information does not appear on the control panel. In such cases, switch the power off and then on again.

• To change the settings of items set by the system administrator, you need to enter the user ID and passcode. Ask your system administrator for the user ID and passcode.

Browser

CentreWare Internet Services supports the following browsers:

For Windows 7

• Microsoft Internet Explorer 8.0

For Windows Vista

Microsoft Internet Explorer 7.0

■For Windows XP

- Mozilla Firefox 3.0
- Microsoft Internet Explorer 6.0 Service Pack 3

■For Mac OS X 10.6

- Safari 4
- Mozilla Firefox 3.0

■For Mac OS X 10.5

• Mozilla Firefox 3.0

■For Mac OS X 10.4

- Mozilla Firefox 3.0
- Safari 1.3

■For Mac OS X 10.3.9

Mozilla Firefox 3.0

Browser Settings

Before using this service, ensure the following settings on your browser. The following describes the setting procedure for Internet Explorer 6.0 Service Pack 3.

- **1** Select [Internet Options] from the [Tools] menu.
- 2 On the [General] tab, click [Settings] for [Temporary Internet Files].
- **3** In the [Settings] dialog box, select [Every visit to the page] or [Every time you start Internet Explorer] for [Check for newer versions of stored pages:].
- 4 Click [OK].

Proxy Server and Port Number

The following describes proxy server settings and the port number required for this service.

■Proxy Server

We recommend that you access this service directly, not through a proxy server.

Note
 If using a proxy server, specifying the machine's IP address in the browser results in slower responses, and could prevent some screens from appearing. In such cases, set the machine's IP address on the browser not to use a proxy server. For information on the setting instructions, refer to the documentation provided with your browser.

■Port Number

The default port number of this service is "80". The port number can be changed in [Properties] > [Connectivity] > [Protocols] > [HTTP]. Ports "1" to "655" can be used.

If you set the port to a number other than 80, you must add ":" and the port number after the IP address or the Internet address when entering the address into your browser.

For example, if the port number is 8080, the URL is:

http://[the machine's IP address]:8080/

or

http://[the machine's Internet address]:8080/

You can check the port number in a Configuration Report. For information on the Configuration Report, refer to "4 Machine Status" > "Machine Information" > "Print Reports" in the Administrator Guide.

Note • If communications are encrypted, you must specify an address that starts with "https" instead of "http" to access CentreWare Internet Services.

Starting CentreWare Internet Services

To use this service, perform the following procedure on your computer.

- **1** Start up the computer, and a web browser.
- 2 Enter the machine's IP address or Internet address in the browser address field, and press the <Enter> key.
 - If your network uses DNS (Domain Name System) and the machine's host name is registered in the domain name server, you can access the machine using the URL with the combination of the host name and the domain name. For example, if the host name is "myhost", and the domain name is "example.com", then the Internet address is "myhost.example.com".
 - Ask your system administrator for the IP address or Internet address.
 - When specifying a port number, add ":" and the port number after the IP address or the Internet address.
 - If the Authentication feature is enabled on the machine, enter a user ID and passcode in the [User Name] and [Password] fields. Ask your system administrator for the user ID and passcode.
 - If communications are encrypted, you must specify an address that starts with "https" instead of "http" to access CentreWare Internet Services.
 - If authentication of the system administrator fails, the following message is displayed in the right frame of web browser:
 - "Login failed."
 - If the number of times that authentication fails exceeds the specified number, the following message is displayed in the right frame of web browser:

"Switch the machine Off and then On for System Administrator login."

13 Appendix

This chapter contains a glossary of terms used in this guide.

•	Glossary)
---	----------	--	---

Glossary

Term	Description
A3	420 x 297 mm paper
A4	297 x 210 mm paper
A5	210 x 148 mm paper
Alias	An alternative name of the machine's e-mail address. For example, when the e-mail address for the machine is ifax@mb1.abc.fujixerox.com, you can use ifax@fuji-xerox.com (alias) to reach the same location.
Auto Center	A feature that automatically moves an image to the center of the paper when copying.
Auto Clear	A feature that automatically returns the touch screen to its default display when the machine is inactive for a certain period of time.
Auto Select	Based on the document loaded and the magnification selected, the machine automatically selects an appropriate paper size.
Auto Tray Switching	When paper runs out during copying or printing, another tray loaded with the same paper size and in the same orientation automatically begins supplying paper.
B4	364 x 257 mm paper
B5	257 x 182 mm paper
Binding Shift	When creating a booklet, this feature adds margins to the center binding area of documents.
Book Scanning	A feature that copies the left and right pages of an unfolded document onto two separate sheets of paper.
Border Limit (Page split threshold value)	One more sheet is used when the length of the transmitted document exceeds the length of the paper installed on the receiving terminal. A margin at the bottom of the received document can be eliminated so that the data can be printed on one page. The amount of space that can be removed from the bottom of a document is the border limit. When the border limit value is small, the data is printed on the next page. But when it is large, a larger space can be cut so that data can be printed on one page.
Collate	A feature where each copy set is delivered in the same order the documents were copied.
Communication(s)	A communications network that can offer voice data (telephone), image data (fax), video data (videotex) and PC data (PC communication service) over the same channel. In this guide, it is mostly referred to as transmitting/receiving images as well as speaking with a remote user.
CSV File	CSV (Comma Separated Values) is a file format that is often used for saving data by spreadsheets and database programs.
Cut Paper	Standard paper sizes, such as A4 and B5.

Term	Description		
Default Screen	A screen displayed on the touch screen immediately after switching the power on, or pressing the <clear all=""> button. The screen is also displayed when the Auto Clear feature is used.</clear>		
Default Value	A factory default value, or a value set in System Administration mode.		
Dial	In this guide, it refers to entering a recipient's fax number. The methods of dialing provided by the machine include: manual dialing using the numeric keypad, speed dialing, one touch dialing, and using the address book, etc.		
Dial Tone	A tone generated from the telephone line. It indicates that you are connected to the line.		
Dial Type	The dial type of connected line. The machine offers two dial types: Tone (push circuit) and 10PPS (dial circuit / 10PPS).		
Direct Internet Fax	Allows you to send e-mail directly to Internet Fax-compatible machines without going through the SMTP server, while Internet Fax uses the SMTP server to send e-mail.		
Document Image	An image of a document scanned by the machine.		
DPI	An abbreviation of Dots Per Inch. A unit used to describe printing resolution in terms of the number of dots printed in one inch. Used as a unit to describe resolution.		
ECM	An abbreviation of Error Correction Mode. A type of G3 transmission. ECM transmission sends the document image data in segments and retransmits segments that the remote machine receives incorrectly. "ECM" described on an Activity Report shows that the communication was processed using ECM.		
Edge Erase	A feature that erases the top/bottom, left/right or center edge of a document image when copying.		
Emulation	This refers to operating the printer to achieve the same print results as when printing with other manufacturers' printers. This mode is called Emulation Mode.		
Energy Saver Feature	 A feature that switches the machine status to standby after a period of inactivity. The following energy saver features can be set for the machine. Low Power Mode: The power to the fusing unit and motor is lowered when the machine is left unused for a fixed amount of time. The touch screen goes out, and the <energy saver=""> button lights up.</energy> Sleep Mode: Most of the units in the machine are in standby status. The machine consumes the least power. 		
Error Code	A code is displayed on the touch screen or a report when a problem occurs.		

Term	Description
F Code	A transmission method defined by Communications and Information Network Association of Japan (CIAJ) for use of T.30* sub-addresses standardized by ITU-T. Between the machines with the F Code feature, including those manufactured by other companies, various features making use of F Code can be used. (*: Communication standard) With IP Fax (SIP) communication and the Internet Fax feature of the machine, you can use F Code to forward fax documents received in folders by e-mail.
F4800	This refers to communicating with a remote terminal outside the country. It is also one of the Transmission Mode selections that reduces transmission speed to enable reliable communications even under poor line conditions.
Fax Gateway	Connects the Internet network to regular telephone lines, enabling e-mail documents to be sent as fax documents to regular fax machines.
Fax Server	A feature that transfers image data received by the machine to a Server Fax server and transfers image data received by a Server Fax server to the machine via a network based on the settings you made. Using this feature enables you to manage multiple machines.
G3	A facsimile communication system standardized by the advisory committee for International Telecommunications (CCITT, now the ITU-T).
Header	A record of the sender. It is printed on the top edge of a received document.
FQDN	FQDN (Fully Qualified Domain Name) is fully specified with domain name, sub domain name, and host name so that it is identified in network.
Image Enhancement	A feature which makes the border between black and white smooth, with rough edges reduced, giving the appearance of a higher resolution.
Image Rotation	This feature rotates the document image by 90 degrees when the document orientation is not the same as the paper supply orientation.
Independent X - Y%	A feature that transforms the document image horizontally or vertically.
Internet	A worldwide communications network that combines miscellaneous networks.
Internet Fax	Unlike a regular fax machine, Internet Fax uses corporate networks or the Internet to send or receive e-mail (TIFF attachments).
Job Offset	This feature outputs sheets in alternating offsets to make each set easier to recognize.
Line Monitor	Allows you to audibly monitor a transmission through the speaker after dialing and until you are connected.
Low Toner Alert Tone	A tone the device sounds when the drum/toner cartridge needs to be replaced.
Machine Ready Tone	A tone produced when the status of the machine changes from standby to ready, such as when the power is switched on.

Term	Description
МІМЕ Туре	Multipurpose Internet Mail Extension. A method for determining what kind of data was received by e-mail. A MIME type refers to the type of data.
NAT/NAPT	NAT (Network Address Translation) converts private IP addresses to global IP addresses. NAPT (Network Address Port Translation) also converts IP addresses to global addresses. It modifies port numbers as well.
NV Memory	A non-volatile memory, which stores the settings information of the printer even when the power is switched off.
Off-hook Dialing	Dialing with the receiver off the hook.
On-hook Dialing	Dialing with the receiver on the cradle.
Optional component	This refers to a product that is sold separately. In addition to the machine's basic configuration, various optional features are available as separately-sold optional components. (For more information on optional components, contact our Customer Support Center.)
Pages per Side	A feature that copies two or four documents onto one sheet of paper.
PCL	An abbreviation of Printer Control Language. A page description language developed by Hewlett Packard.
PJL	An abbreviation of Printer Job Language. A command language for controlling printers developed by Hewlett Packard.
Polling	A feature that allows you to retrieve a file from a remote machine.
POP3	An abbreviation of Post Office Protocol Version 3. One of the commonly used communications protocols used for receiving e-mail. It sets up a private mailbox on a provider's e-mail server, and receives messages when a communication is made. POP3 is for receiving only. SMTP is used for sending e-mail.
Print Page Buffer	The memory area where printing images are stored.
Printable Area	The actual area on a sheet of paper which can be printed.
Profile	A protocol controlling image resolution, paper size, and other attributes when sending or receiving faxes using Internet Fax. The profiles that can be used vary with the Internet Fax of the remote terminal. When specifying a profile, check that it can be handled by the other party's Internet Fax-compatible machine.
QoS	QoS (Quality of Service) is a technology to ensure a certain- level of speed for specific network communications.
RAM	An abbreviation of Random Access Memory. It is a storage device (memory) where information can be retrieved as well as stored.
Receive Buffer	An area in the machine's memory or hard disk drive. Data sent from client computers is stored in this area.
Receiving Paper Size	A feature that specifies the output paper size for received fax documents. The specified paper size will be declared to recipients from the sender.

Term	Description
Recipient	The person or terminal you send a document to. "Dialing" indicates the operation of entering a recipient's telephone number. For Internet Fax, this refers to the recipient's e-mail address.
Remote Terminal	A terminal with which you want to communicate. This is a general term for terminals such as telephones, facsimile machines and personal computers.
Resolution	Represents a fineness of detail that can be distinguished on an image. It is usually described in terms of the number of dots per square inch (dpi), and a higher value indicates a higher resolution (finely represented).
ROM	An abbreviation of Read Only Memory. It is a storage device (memory) specific for the retrieval of information.
ROS	An abbreviation of Raster Output Scanner. It is a device for writing image signals to a drum (light sensitive). A ROS is often referred to as a laser beam scanner.
Scan	Sensing or reading a paper document and converting the optical image of the document to an electronic image. The machine offers two scanning devices: document glass and document feeder.
Screen	The screen that is displayed on the touch screen. It displays messages and feature buttons.
Select	In this document, "Select" refers to highlighting a feature selection by touching the feature button on the touch screen with your finger or the stylus pen.
Send Password	This feature requires to enter an "S" and the ID of a remote terminal after entering its fax number. This prevents transmission errors.
Sender	Originator of a communication. It is used as opposed to "recipient".
Separator	A blank, colored, or copied sheet of paper inserted between two copy sets.
SIP	SIP (Session Initiation Protocol) is a call control protocol which is necessary to communicate in an IP network.
SIP Server	Servers such as a SIP proxy server and SIP registrar server.
SIP proxy server	A SIP proxy server forwards requests from SIP terminals to other SIP terminals and SIP servers.
SIP user name	In SIP communication, user names are specified in "xxx@yyyy" format. (example: 1111@192.168.1.1) The part before "@" ("1111" in the example) is the SIP user name.
SIP registrar server	A SIP registrar server receives registration request from SIP terminals and registers the information.
SMTP	An abbreviation of Simple Mail Transfer Protocol. A communications protocol (an agreement governing the way data is transmitted) commonly used for sending e-mail.
Start Reservation	In this guide, this refers to loading a document, selecting features, and pressing the <start> button immediately after switching the power on. Once the machine is warmed up and ready, it will automatically start copying.</start>

Term	Description
Status Display Code	A code that indicates the machine status. When an error occurs on the machine, a status display code appears on the touch screen.
Store	In this guide, it is referred to as scanning an image of a document and saving the image on the machine.
Stored Programming	By registering a series of operations, the machine executes the operations by simply pressing [Stored Programming] on the touch screen.
T.38	T.38 is a protocol for timely fax communication over an IP network. The protocol is also necessary for fax communication between existing public phone lines and IP networks.
Transmission Interval	The period between transmissions.
Transparency Copy	A feature that copies on transparency films or inserts a sheet of blank or copied paper between transparency films.
UNC	An abbreviation of Universal Naming Convention. UNC is a way to specify a path describing the location of a network resource, such as shared folders or shared printers, on a network, Microsoft Network (SMB). The UNC syntax uses "\\" before the hostname, and the hostname and resource name are delimited by "\". If the hostname is "myhost", and if its host shared folder name is "sharefolder", the UNC syntax is described as follows: \\myhost\sharefolder
VoIP Gateway	The device that relays voice signals including fax communication between IP network and public phone lines. It has a feature to convert the communication using VoIP and G3 fax communication in public phone lines.

Index

Symbols

dd	187
<u>aa</u>	

Numerics

1 Staple (Simple Copy)	84
10BASE-T/100BASE-TX connector	42
2 Pages Up (Simple Copy)	84
2 Sided Book Copying	100
2 Sided Copying (Simple Copy)	83
2 Sided Scanning	185, 195, 265
2/4 Hole Punch Kit	48
2-Sided Print	389

Α

Activity Report 67
Add Me 261
adding a comment/a date/page numbers
to copies 119
adding originals 147
adding sender name and phone number
to faxes
adding the sender's address 261
additional feature buttons
Address Book 188, 258, 280
adjusting contrast 302
adjusting copy density/sharpness/saturation of
images
adjusting fax density 195
adjusting foot 42
adjusting scan density and image sharpness \hdots 301
adjusting the copy density
adjusting the image position 105
Advanced Settings 300
Annotations 119
attaching covers to copies 114
Auto Detect 200, 308
Auto Receive 239
Auto Suppression

В

Background Suppression	
Batch Print	
Book Copying	
Book Faxing	
Book Scanning	
Booklet	
Booklet Creation	111, 389
booklet staple cartridge	
booklet tray	50
booklet unit	
booklet unit side cover	
Broadcast	
Broadcast Send	166, 187, 235
Browse	
Build Job	

С

<c (clear)=""> button</c>	60
Calculator %	
calling a stored program	
calling a stored program for Build Job	
Cancel	
center tray	40, 47, 49, 50
CentreWare Internet Services	401, 404
Change Quantity	
changing a job flow sheet	
changing a stored program name	
changing the orientation of images	108
Chapter Start	144
Charge Print	378, 390
checking completed jobs	371
checking the finished output of the cop	y145
checking/selecting files in a folder	
<clear all=""> button</clear>	60
Color Scanning	
Color Space	
Combine Original Sets	147
combining multiple pages into one she	et214
Compression Method	
confirmation indicator	45

Index

confirming a recipient1	94
confirming remote machine response prior to	
transmission2	229
confirming the fax job in Job Status1	60
constant velocity transport glass	.45
Contrast	302
control panel	.40
Copies	.97
Copy Output1	35
copying both sides of an ID card1	39
copying facing pages onto separate sheets	.98
copying multiple pages onto one sheet1	16
cover A	.42
cover B	.42
cover C	.42
cover D	.42
cover E	.42
Cover Page2	211
Covers1	14
creaser unit	.48
creating a booklet1	11
Custom buttons60,	61

D

<data> indicator</data>	60
Delay Start	
Delayed Print	376, 389
Delete Outside/Delete Inside	149
deleting Charge Print jobs	
deleting Delayed Print jobs	
deleting outside or inside of the selected	
area	149
deleting Private Charge Print jobs	
deleting Sample Set jobs	
deleting Secure Print jobs	
deleting stored jobs	
deleting stored programs	
density levels	
<dial pause=""> button</dial>	60
Digital Signature	223, 318
Direct Fax	
Direct Printing	
Disable Auto Printing/Release Printer	67
document cover	40
document feeder72	2, 154, 246

document feeder tray	
document glass	40, 73, 247
document guides	
document output tray	
document stopper	
DocuWorks	
DocuWorks DocuWorks Security	
DocuWorks Security	
DocuWorks Security DocuWorks Signature	

Ε

Edge Erase	103, 310
editing a recipient	
editing the Internet Fax mail contents	
E-mail	257
E-mail Printing	390, 392
Encryption	223, 318
<energy saver=""> button</energy>	59
Energy Saver mode	
enlarged copies	85
Enter Output Size	312
entering a stored program name	
entering an address	
entering specific symbols	193
entering text	68
entering the e-mail body	264, 294
erasing edges and margin shadows in	
the document	
erasing edges and margin shadows of	
the document	103
erasing the background color of	
documents	95, 302
<error> indicator</error>	60
error terminations	
exit 2 tray	

F

F Code	
Facsimile Information Services	225, 229, 242
Fax	
Fax Receiving Mode	67
Fax/Internet Fax	
Fax/Internet Fax Options	205

File Format	267, 295
File Name	316, 318
File Name Conflict	317
finisher tray	48, 50
Folder Receive	241
Folding	131
Forced 4800 bps	207
Form Overlay	148
From	
Front	
front cover	40, 47, 48, 50
front transport cover	
fusing unit	43

G

G3 Auto 207
G4 Auto 207
gigabit Ethernet interface connector 42
green tab 45

Н

hidden text	130
hole-punch waste container 48,	50

I

ID Card Copying 139
Image Enhancement 302
Image Options
Image Rotation 108
Image Shift 105
importing scanned data 396
Independent X - Y% 87
Index Print 366
inserting blank sheets between
transparencies
Internet Fax 186
Internet Fax Message 213
Internet Fax Profile 222
Internet Fax Subject 212
Internet Fax transmission 167
<interrupt> button 60</interrupt>
Invert Image 107
IP Fax (SIP) 173

J

Job Assembly	141
Job Flow Sheets	
Job Status	
<job status=""> button</job>	59
job template	
JPEG	

Κ

knob45

L

Language	66
Language of the Original	272
Last Original	
Layout Adjustment	
license	31
Lighten/Darken	92, 94, 195
Lighten/Darken (Simple Copy) .	83
loading documents	246
local terminal information	
Lock Out Printer	67
locking casters	40
<log in="" out=""> button</log>	59
Login Name	
Low Power mode	57

Μ

machine components	40
<machine status=""> button</machine>	59
<main power=""> indicator</main>	60
main power switch	43
making 2-sided copies of facing pages	99
making copies to overlay documents	. 148
making enlarged copies spread over multiple	
sheets	. 117
making enlarged/reduced copies	85
making multiple copies on a single sheet	. 132
making multiple copies on one sheet	. 118
	-
making reversed copies of images	
making reversed copies of images managing documents security	. 107
• • •	. 107 . 128

Manual Send	
Media Print	
Media Print - Text	
Message	
message field	64
Meta Data	
Mirror Image	107
Mixed Size Originals	
More Options	
MRC High Compression	

Ν

Negative Image	107
Network Scanner Driver	
Network Scanning	277
New Recipient	260
Next Original	
non-standard size document	101
numeric keypad	60

0

one touch buttons62, 183, 191
one touch panels61
On-hook229
Original Orientation
Original Size101, 199, 307
Original Type93, 184, 197, 267
Originals97
Output Format110
output tray50
outputting bi-folded131

Ρ

Pages per Side	116
Paper Supply	
Paper Supply (Simple Copy)	81
parallel interface connector	42
Password	283, 319
PDF	
PDF Security	270
PDF Signature	271
Photo	

Photo & Text	267
Photographs	300
Poster	. 117, 389
power switch	
Preset Repeat Image	132
print driver	391
Print Mode	67
Printing	328
printing	391
printing Charge Print jobs	380
printing control numbers on the backgroun	ld of
copies	126
printing Delayed Print jobs	377
printing files in a folder	328
printing multiple sets at the remote	
machine	214
printing pending jobs preferentially	385
printing Private Charge Print jobs	382
printing Sample Set jobs	376
printing Secure Print jobs	374
printing stored jobs	372
Priority Send	208
Private Charge Print	. 380, 390
processing documents scanned with differ	ent
settings as one job	141
Promote Job	369
Proportional %	86, 311
Public Folder	382

Q

Quality/File Size	 314

R

Read Receipts	314
rear right cover	
receiver	229
Recipient Print Sets	
Recipient(s)	
Reduce/Enlarge	. 85, 202, 311
Reduce/Enlarge (Simple Copy)	
reduced copies	85
registering stored programs	346
Release Printer	
Remote Folder	

Remote Polling 22	5
removing a recipient 19	4
Repeat Image 11	8
Reply To	6
RESET button 4	2
Resolution 184, 197, 30	5
retrieving files from remote machines 22	5
RSA BSAFE 3	1

S

Sample Job	145
Sample Set	389
Save in	283
saving the scanned data	253
scan density	301
Scan To	294
Scan to Folder	285
Scan to Home	277
Scan to PC	279
scanning a color photograph	300
scanning both sides of a document	265
scanning different size documents	
simultaneously 102, 200, 3	308
scanning facing pages on separate	
sheets 201, 3	306
Screen Brightness	. 67
Searchable Text	270
Secure Print	389
Secure Watermark	128
Segment Separators	144
selecting a communication mode	207
selecting a file format for output data 267, 2	
selecting a folder 323, 3	324
selecting a job flow sheet	340
selecting a transfer protocol	
selecting an output color	
selecting Internet Fax/Fax/IP Fax (SIP)	186
selecting the document type 93, 184, 197, 2	267
selecting the paper for copying	. 89
sending e-mail encrypted by S/MIME	318
sending e-mail with a digital signature	
by S/MIME	318
Sending faxes to multiple recipients	
sending in sections	315

sending Internet Fax encrypted by	
S/MIME	. 223
sending Internet Fax with a digital signature by	
S/MIME	. 223
Server	. 282
Server Fax	. 178
service buttons	64
<services home=""> button</services>	59
[Services Home] screen	64
setting the action to be taken for file name	
conflict	. 317
setting the sender's address	. 263
setting the subject	294
Setup	67
Shadow Suppression	. 302
Shared Name	. 283
Sharpness	94
sharpness	. 301
side tray	
Sideways Images	
Simple Copy	
Single File for Each Page	
Sleep mode	
Specific Color	
specifying a destination PC by browsing your	
network	. 281
specifying a destination PC using	
the address book	. 280
specifying a destination PC using the screen	
keyboard	. 282
specifying a destination using a one touch	
button	191
specifying a destination using	
an address number	. 190
specifying a destination using the	
address book	. 188
specifying a destination using the numeric	
keypad	. 181
specifying a line (port)	
specifying a name for the file to be saved	
specifying a name for the file to be sent	
specifying a reply address	
specifying a scan ratio	
specifying a scan size	
specifying a scanning ratio	
specifying a scanning resolution	
opeonying a coarning resolution	. 000

specifying an e-mail address258
specifying an image compression ratio
when scanning
specifying destination using the
keyboard screen191
specifying destinations158
specifying finishing options135
specifying Internet Fax profiles222
specifying read receipts
specifying send priority208
specifying send time208
specifying the color space
specifying the Internet Fax subject212
specifying the orientation of the loaded
documents
specifying the scan size for the document101
specifying the scan size for the original199
specifying the scanning resolution
<speed dial=""> button60</speed>
Speed Dialing
Split Send
1
Standard Size200, 308
-
Standard Size200, 308
Standard Size
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78</stop></start>
Standard Size
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store for Polling227</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store in Remote Folder390</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store in Remote Folder390Store to Folder285</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store for Polling227Store to Folder390Store to VSB287</stop></start>
Standard Size
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store for Polling227Store to Folder390Store to Folder285Store to USB287Stored File Manager 3253, 398storing files on the machine that a</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store for Polling227Store in Remote Folder390Store to Folder285Store to USB287Stored File Manager 3253, 398storing files on the machine that aremote machine can retrieve227</stop></start>
Standard Size200, 308staple cartridge47, 48, 50Stapling136 <start> button60Starting Rate207<stop> button60stopping a copy job78stopping a fax job162stopping a scan job254Store & Send Link293Store for Polling227Store to Folder390Store to Folder285Store to USB287Stored File Manager 3253, 398storing files on the machine that a227stylus pen41</stop></start>

т

Text	37
------	----

Text Compression
TIFF
TIFF/JPEG Auto Select 267, 268
TIFF-F
TIFF-J 223
TIFF-S
toner cartridge
top cover
touch screen
Transfer Protocol
Transmission Header Text 210
transmitting 2-sided originals 185, 195
transmitting documents with a cover page 211
Transparency Options 133
Transparency Separators
Tray 1
Tray 2
Tray 3 40, 41
Tray 4 40, 41
Tray 5 (Bypass)
Tray 6
Tray 6 top cover
tray attachment

U

Upright Images	266
US 2/3 Hole Punch Kit	48
USB 2.0 interface connector	42
USB memory slot	61
User Name	283
using F Code transmission	218
using remote folder	215

V

Variable Size	
---------------	--

W

Watermark	126,	389
Web Applications		354

Χ

XPS	

Index

ApeosPort-IV 5070/4070/3070 DocuCentre-IV 5070/4070 User Guide

> ME5177E2-1 (Edition 1) June 2011 Copyright © 2011 by Fuji Xerox Co., Ltd.

Fuji Xerox Co., Ltd.